



US 20210276891A1

(19) **United States**

(12) **Patent Application Publication**

Li et al.

(10) **Pub. No.: US 2021/0276891 A1**

(43) **Pub. Date: Sep. 9, 2021**

(54) **SYSTEM AND METHOD FOR REMOVING NITRATE FROM WATER**

(71) Applicant: **Iowa State University Research Foundation, Inc., Ames, IA (US)**

(72) Inventors: **Wenzhen Li, Ames, IA (US); Hengzhou Liu, Ames, IA (US); Yifu Chen, Ames, IA (US)**

(21) Appl. No.: **17/195,321**

(22) Filed: **Mar. 8, 2021**

Related U.S. Application Data

(60) Provisional application No. 62/986,402, filed on Mar. 6, 2020.


Publication Classification

(51) **Int. Cl.**
C02F 1/467 (2006.01)
C02F 1/461 (2006.01)
B01D 53/18 (2006.01)
G01N 30/86 (2006.01)

(52) **U.S. Cl.**
 CPC *C02F 1/4676* (2013.01); *C02F 1/46109* (2013.01); *C02F 2101/163* (2013.01); *G01N 30/8624* (2013.01); *C02F 2001/46133* (2013.01); *B01D 53/18* (2013.01)

(57) **ABSTRACT**

The present application relates to a system for removal of nitrate from water. The system includes a first reactor comprising a porous oxide-derived silver electrode (OD-Ag) for electrocatalytic reduction of nitrate (NO_3^-) to nitrite (NO_2^-) and a second reactor comprising a Pd-based catalyst for catalytic reduction of nitrite (NO_2^-). Also disclosed is a method of removing nitrate from water.

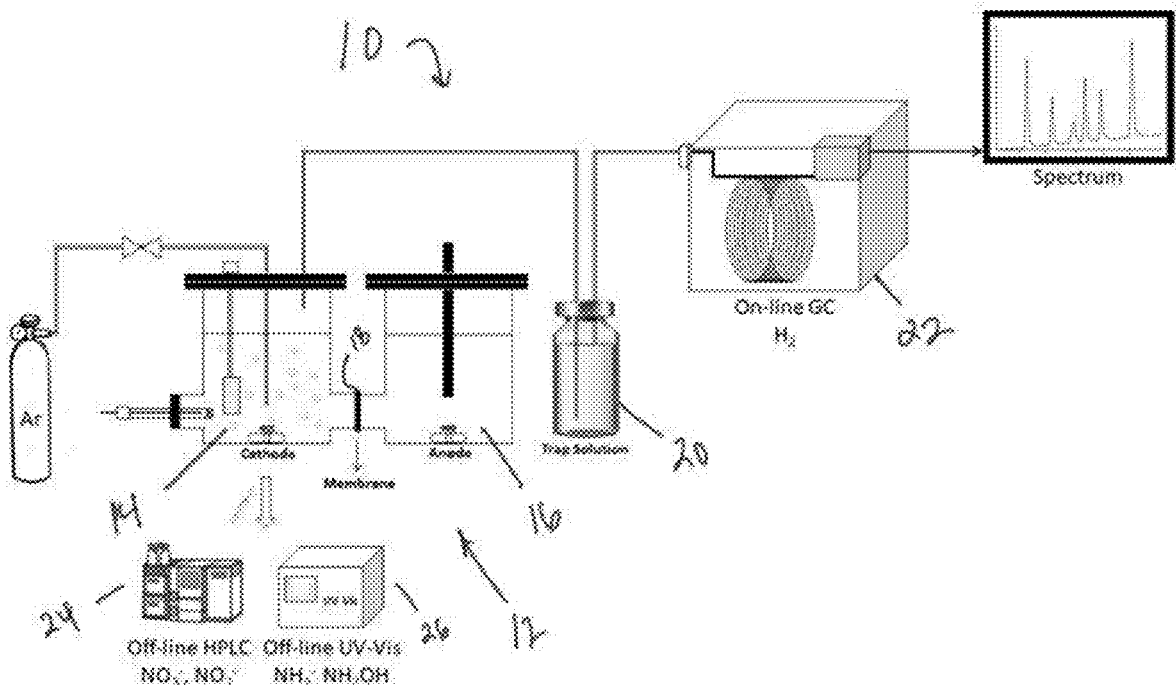

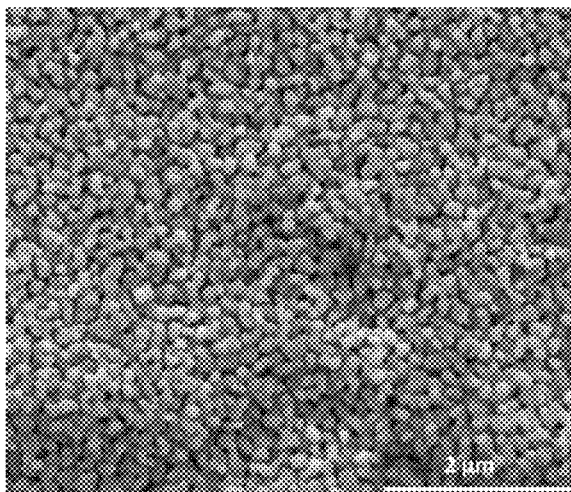


FIG. 1A

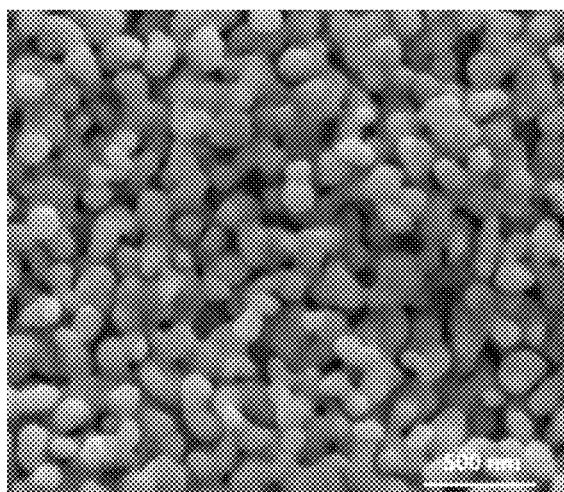


FIG. 1B

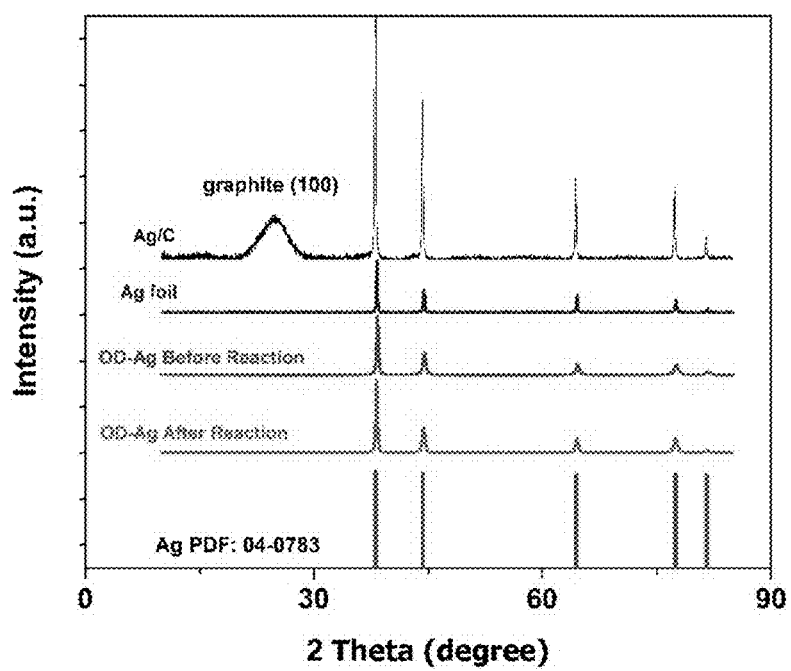


FIG. 2

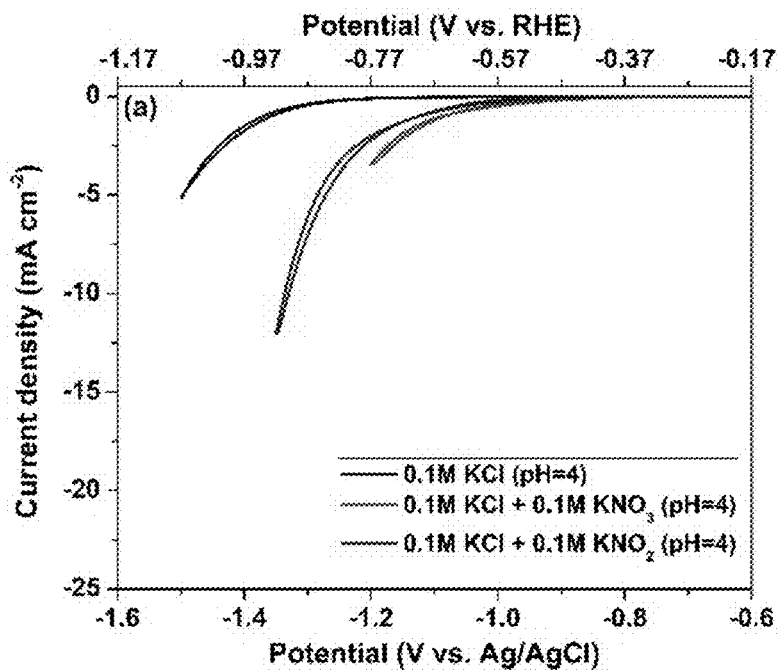


FIG. 3A

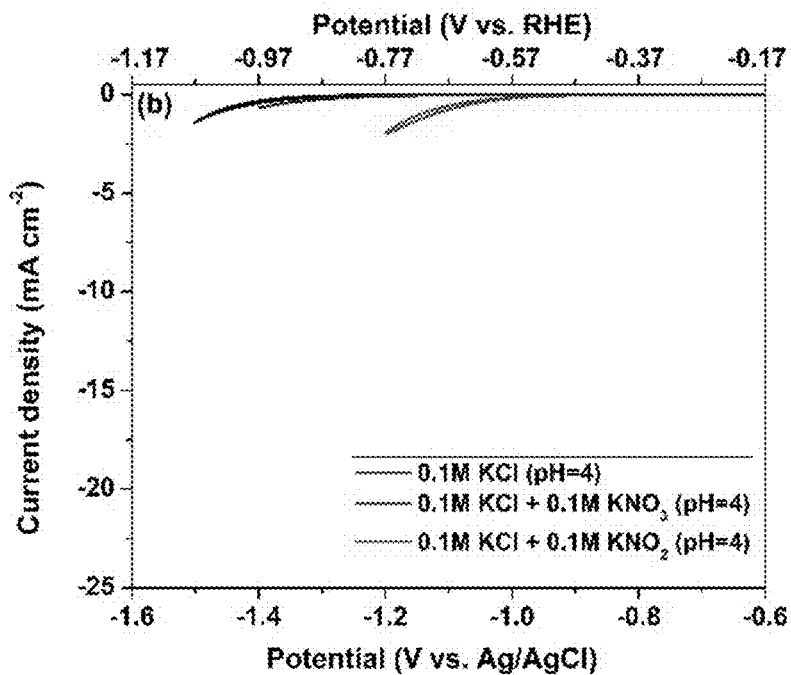


FIG. 3B

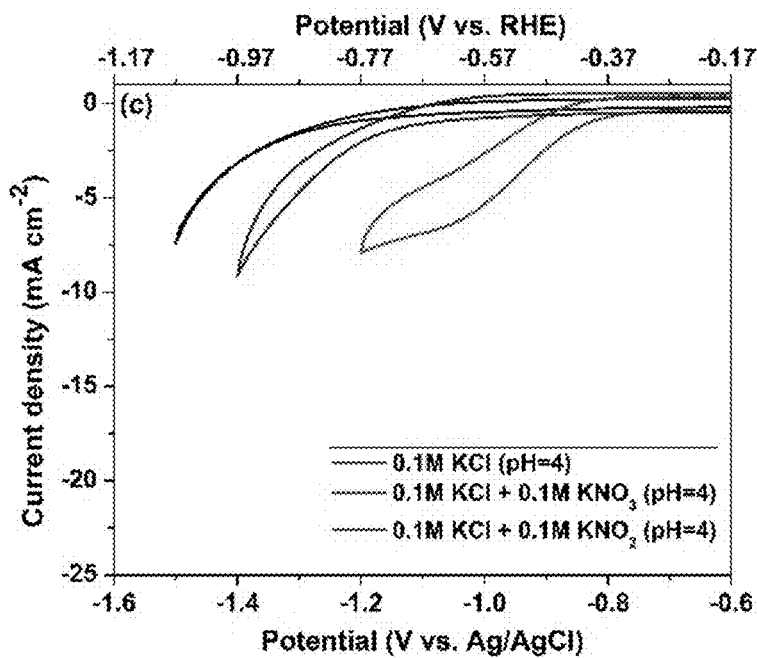


FIG. 3C

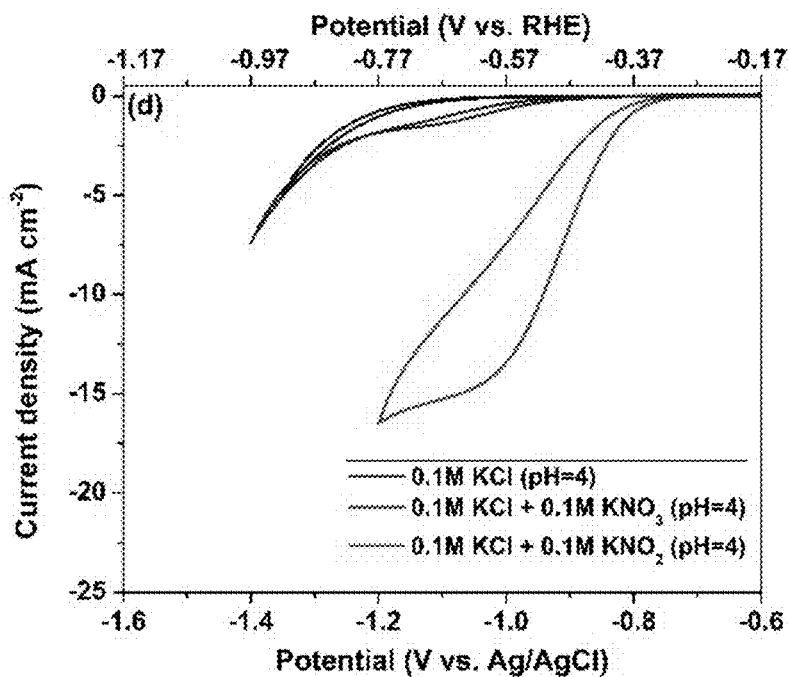


FIG. 3D

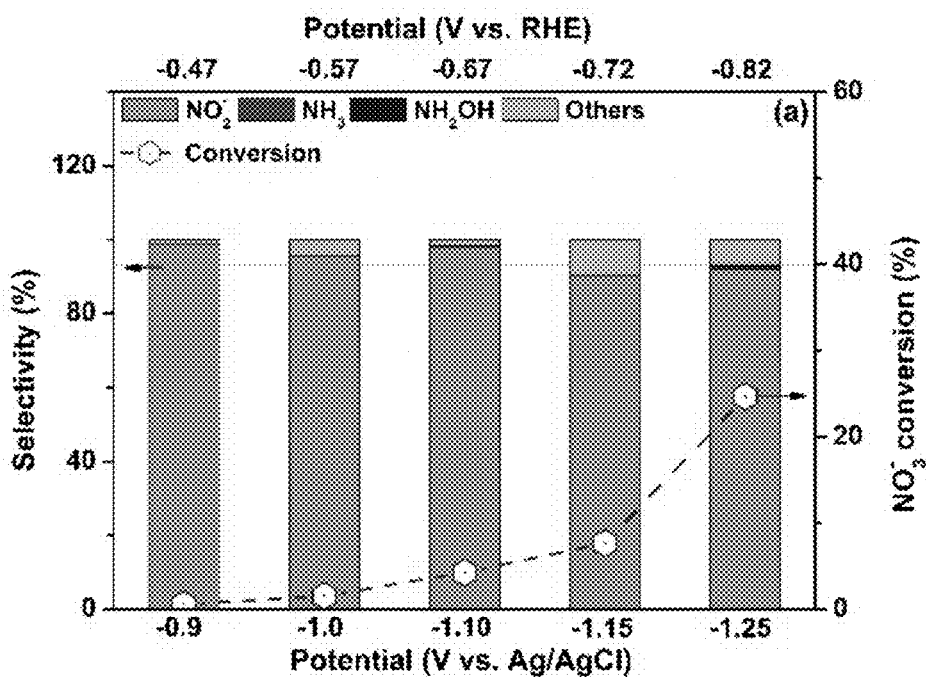


FIG. 4A

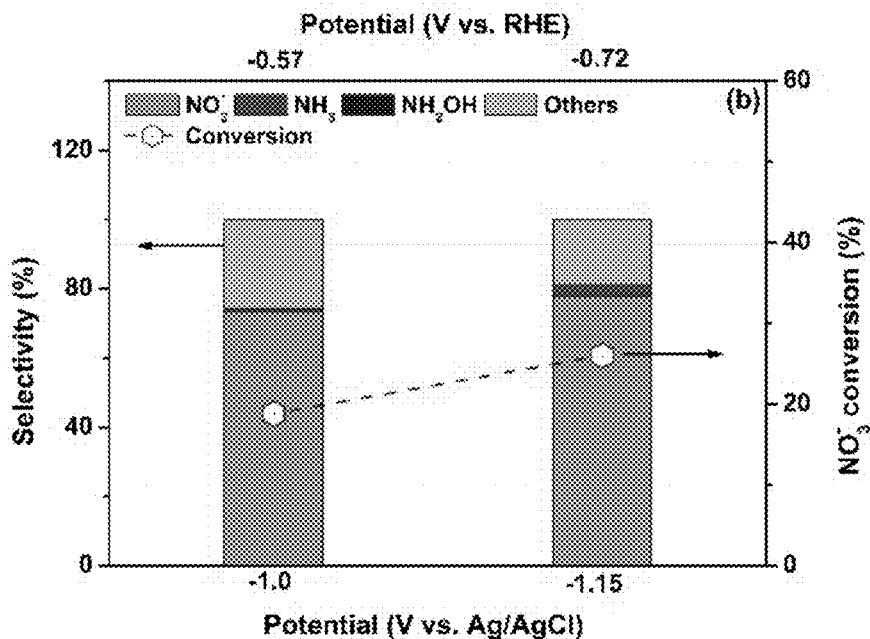


FIG. 4B

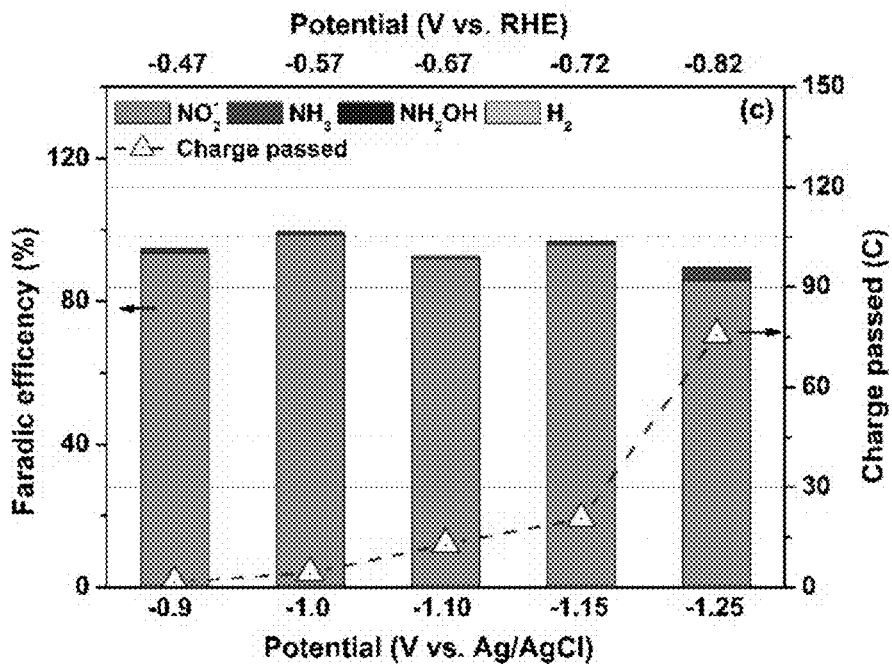


FIG. 4C

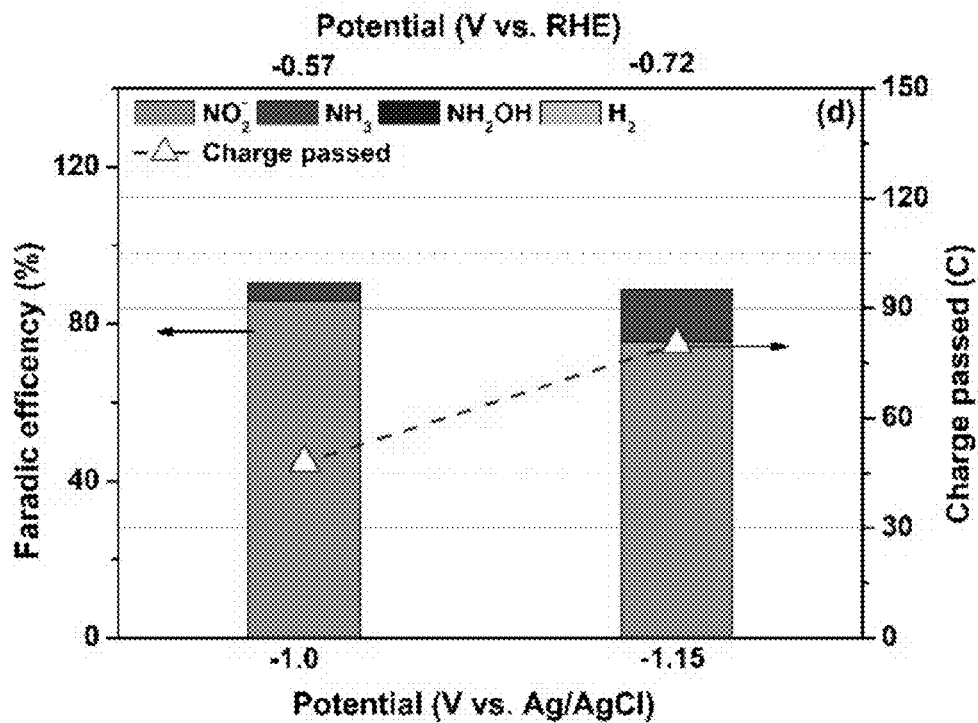


FIG. 4D

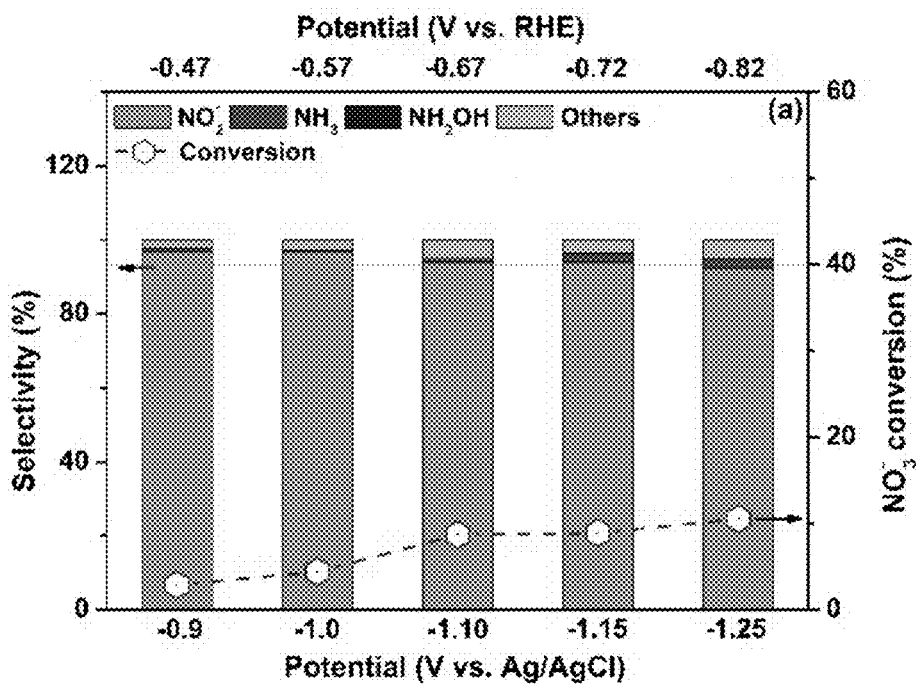


FIG. 5A

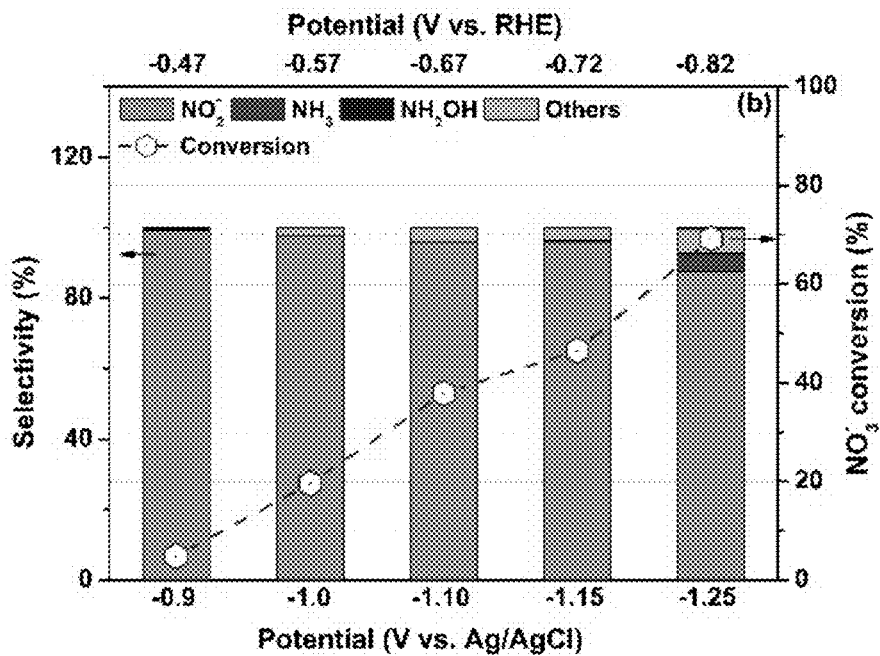


FIG. 5B

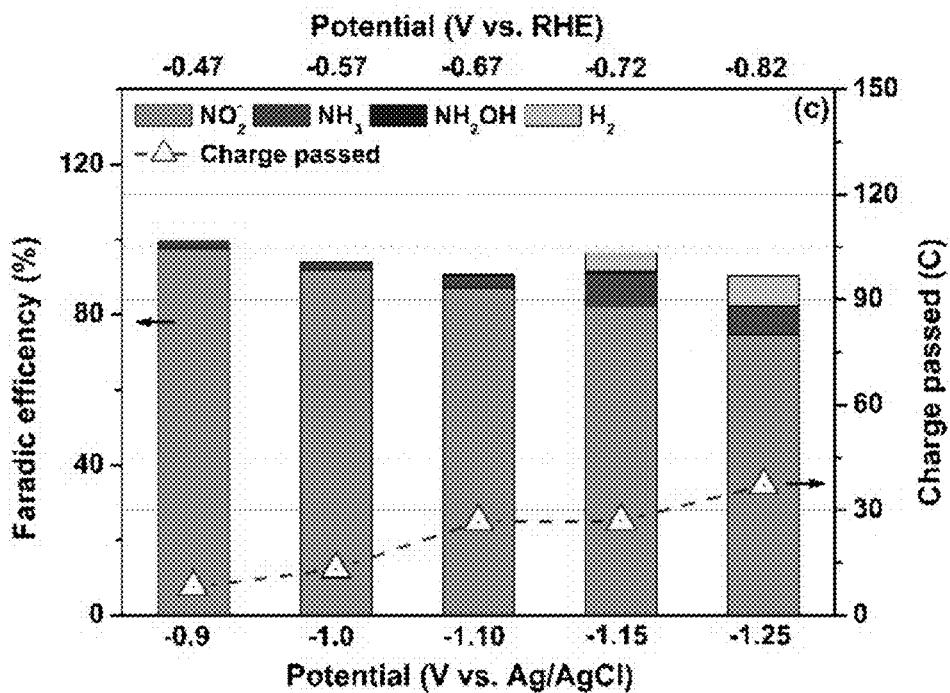


FIG. 5C

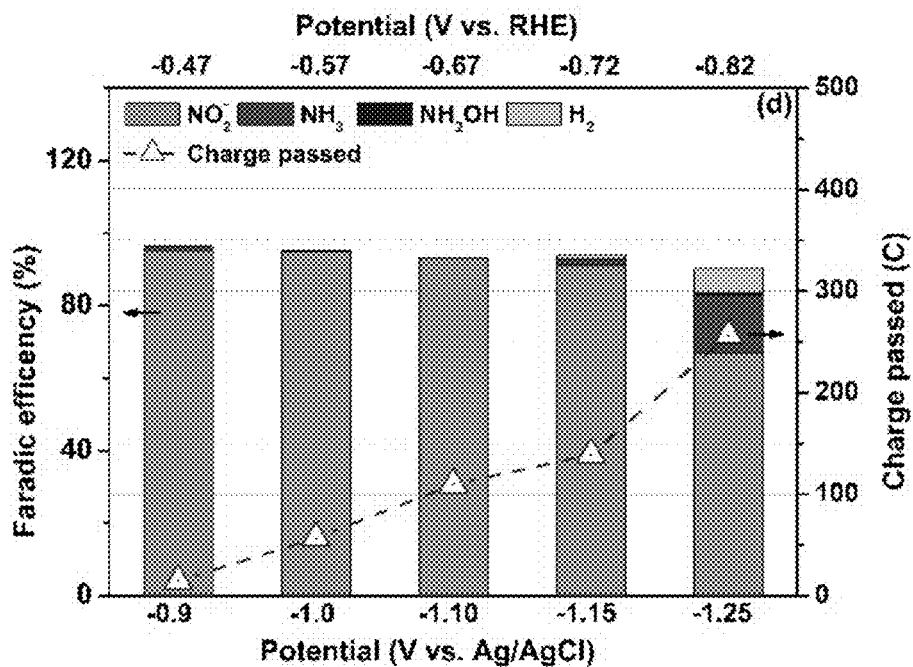


FIG. 5D

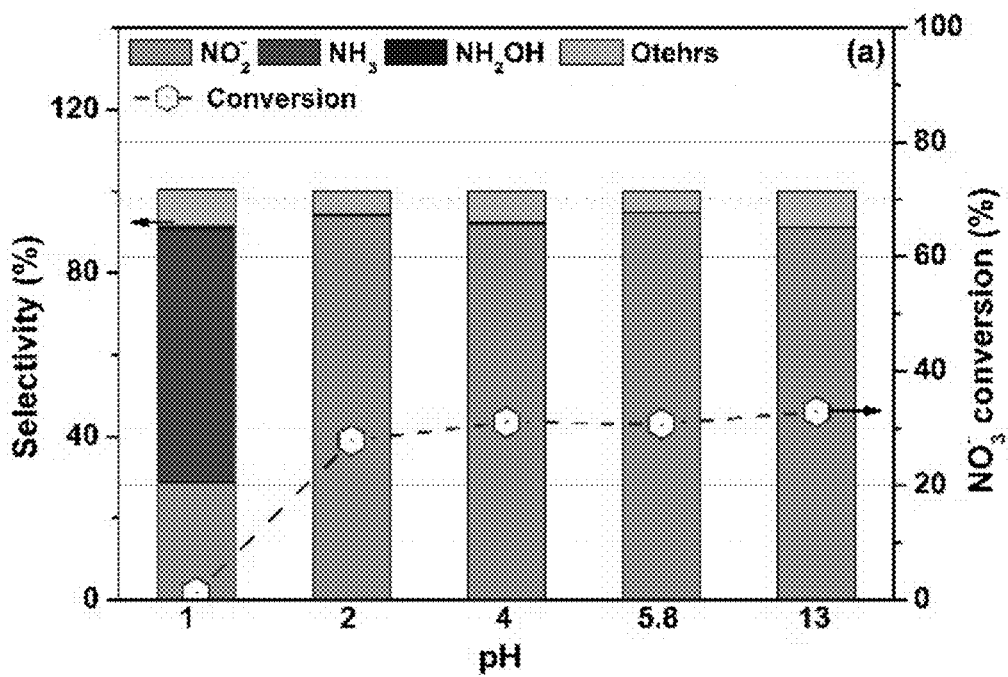


FIG. 6A

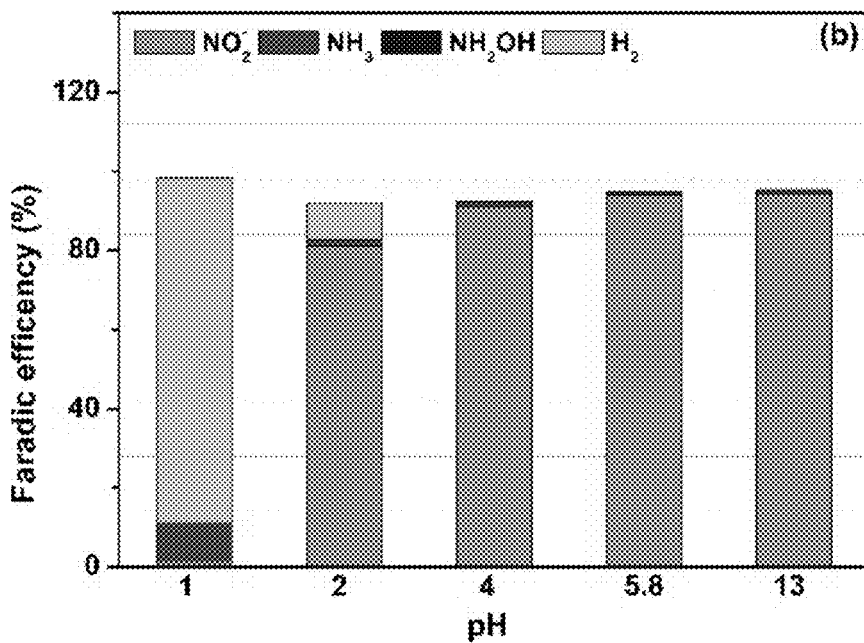


FIG. 6B

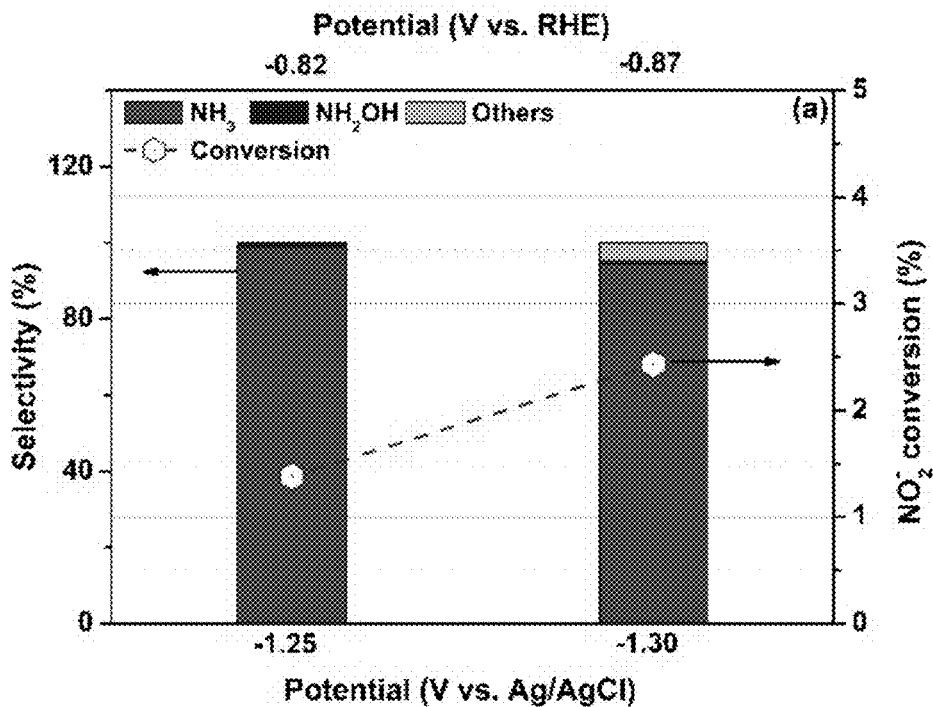


FIG. 7A

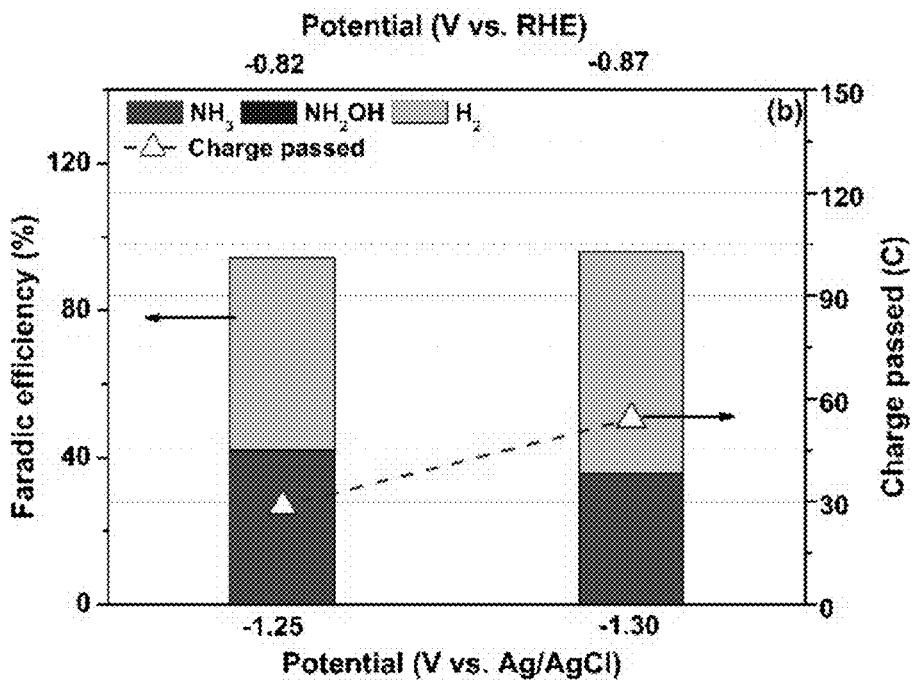


FIG. 7B

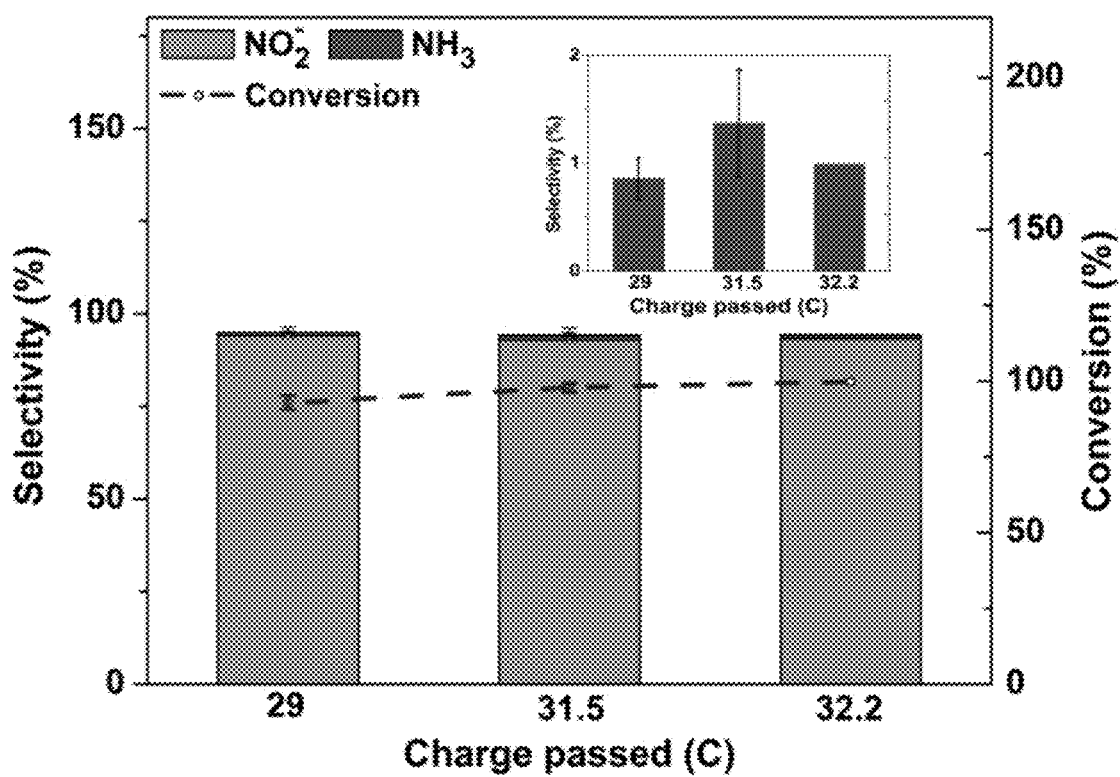


FIG. 8

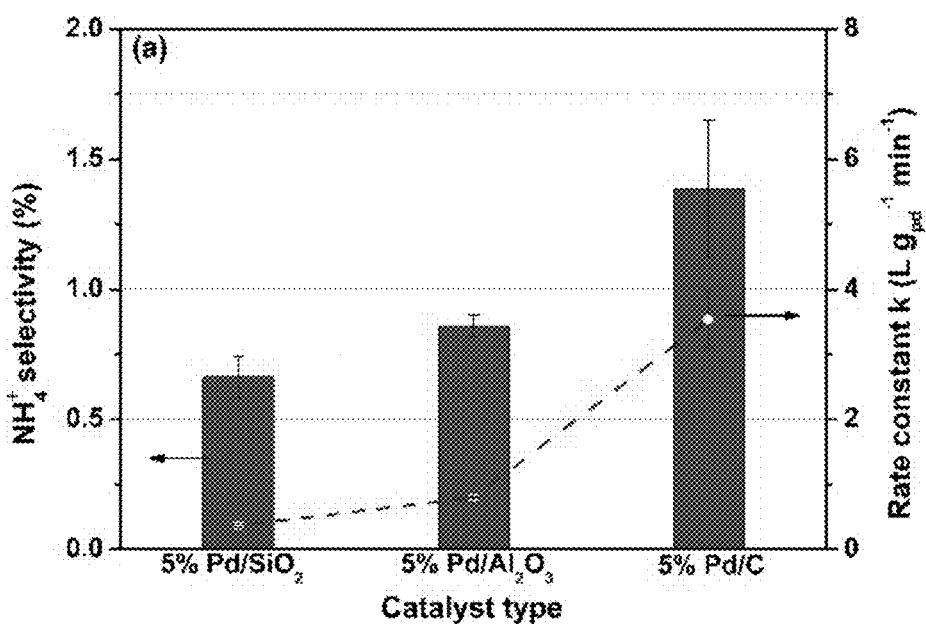


FIG. 9A

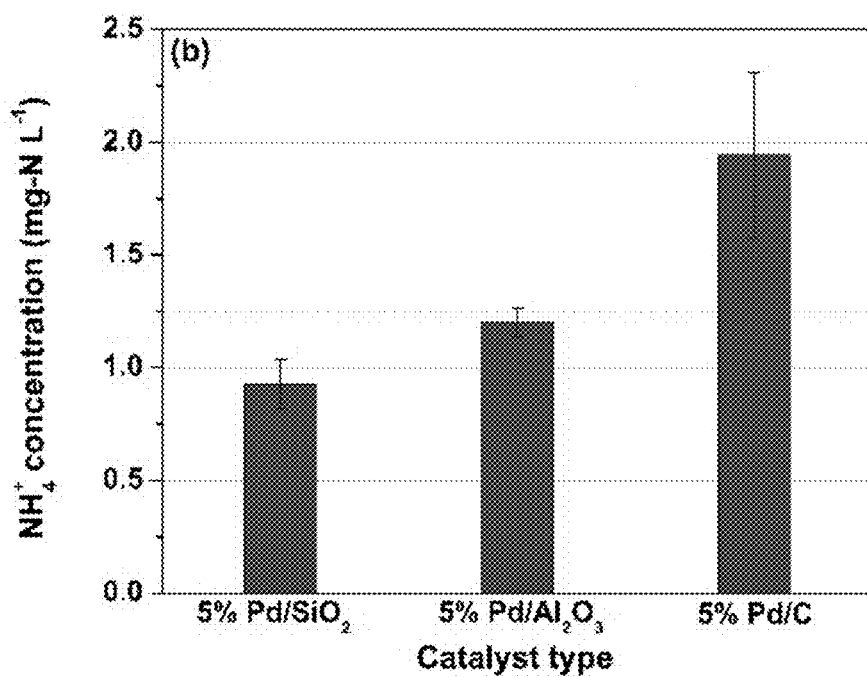


FIG. 9B

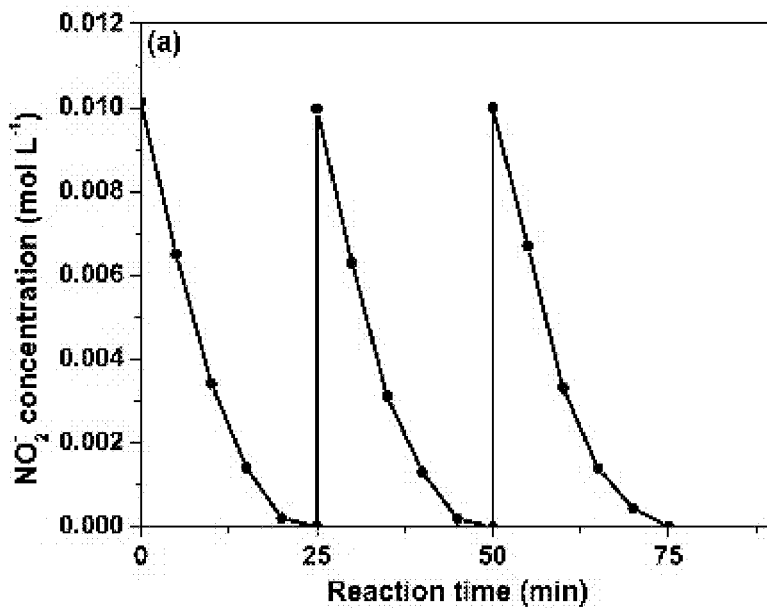


FIG. 10A

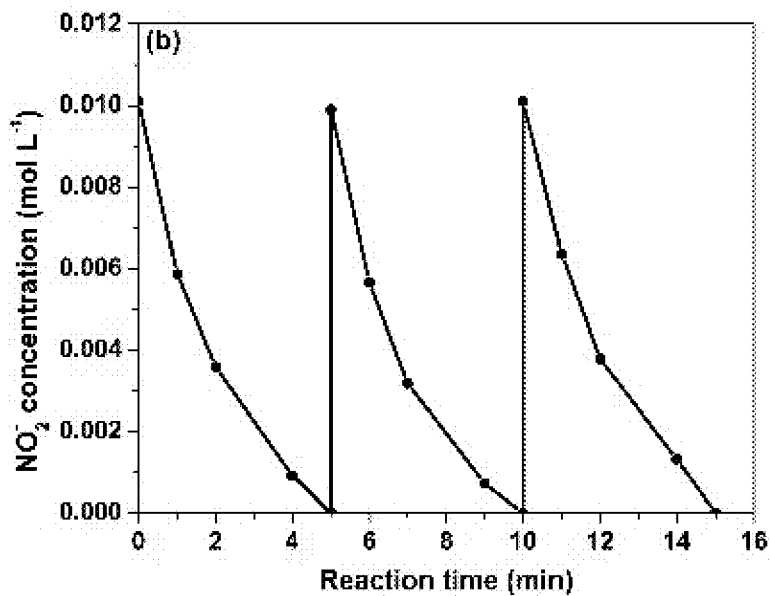


FIG. 10B

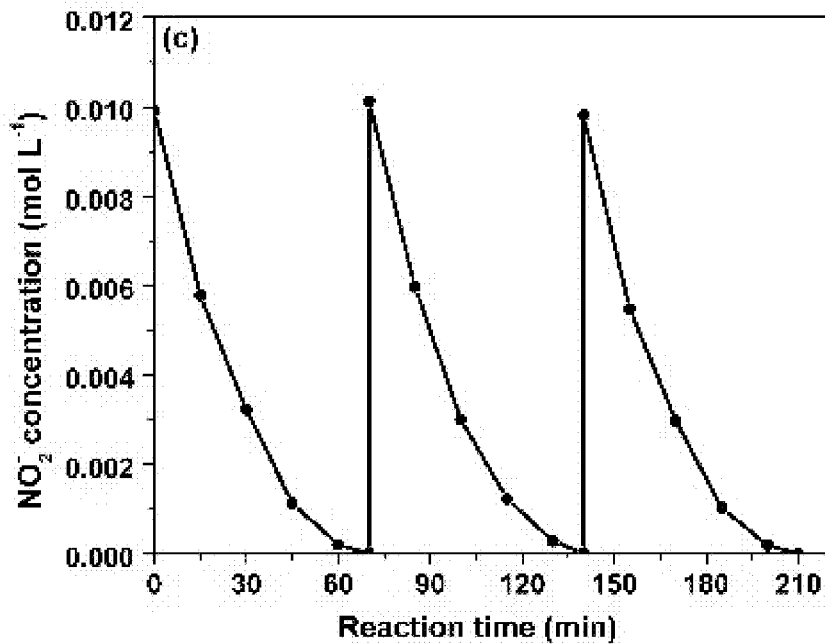


FIG. 10C

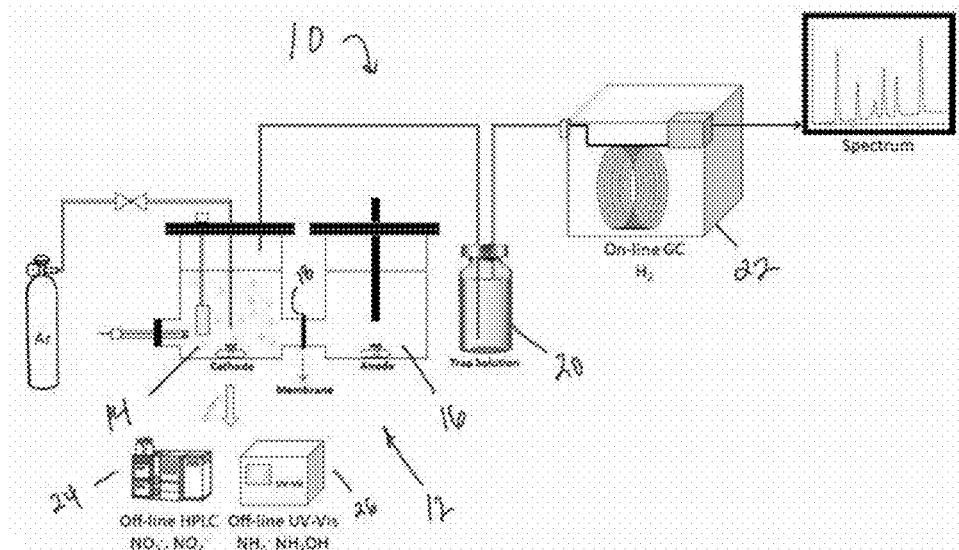


FIG. 11

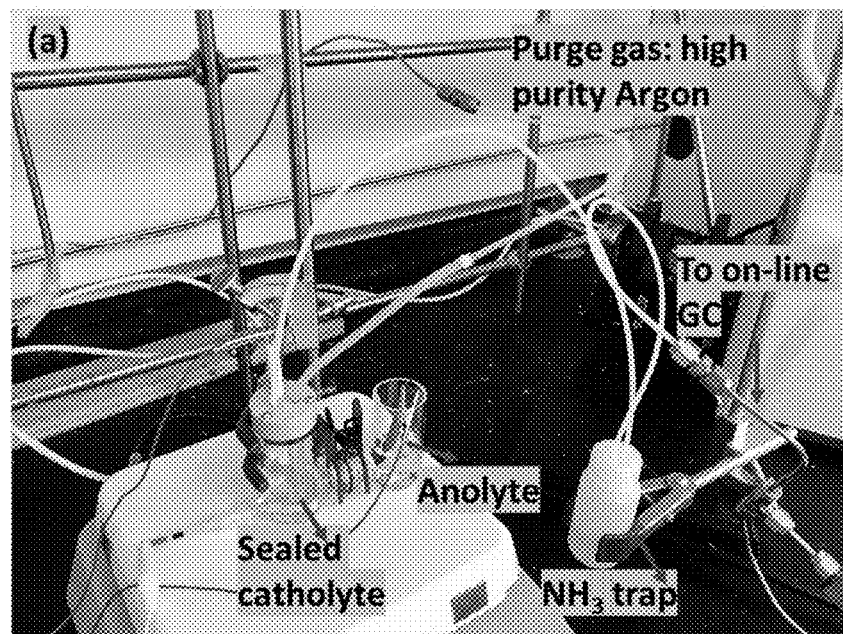


FIG. 12A

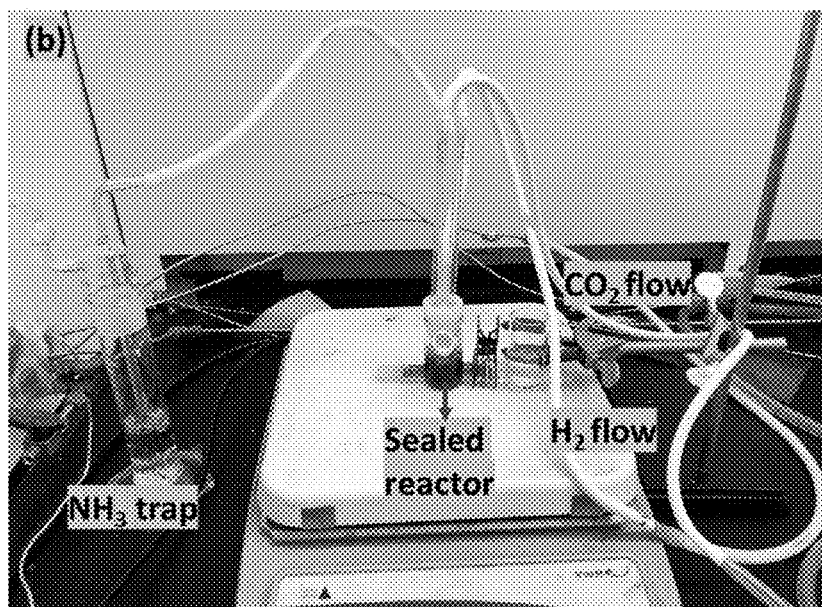


FIG. 12B

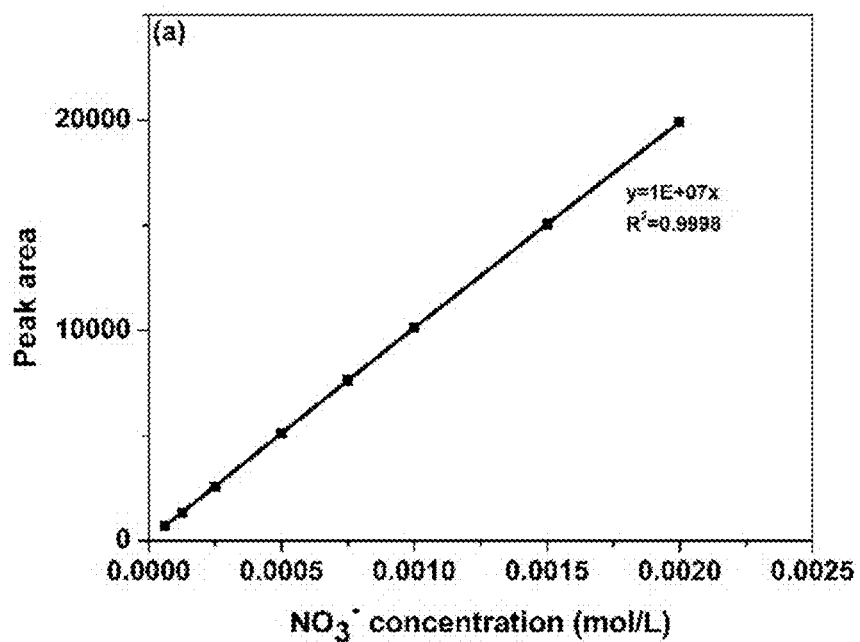


FIG. 13A

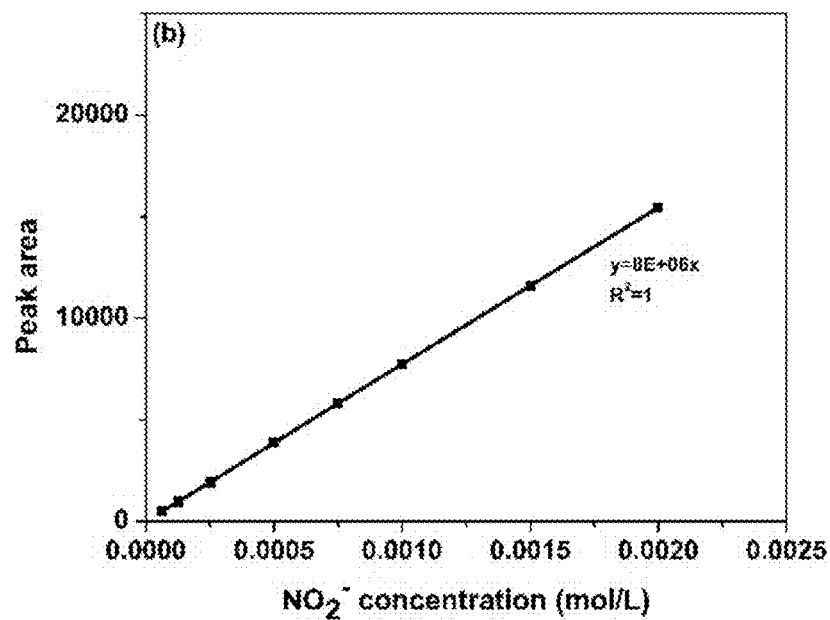


FIG. 13B

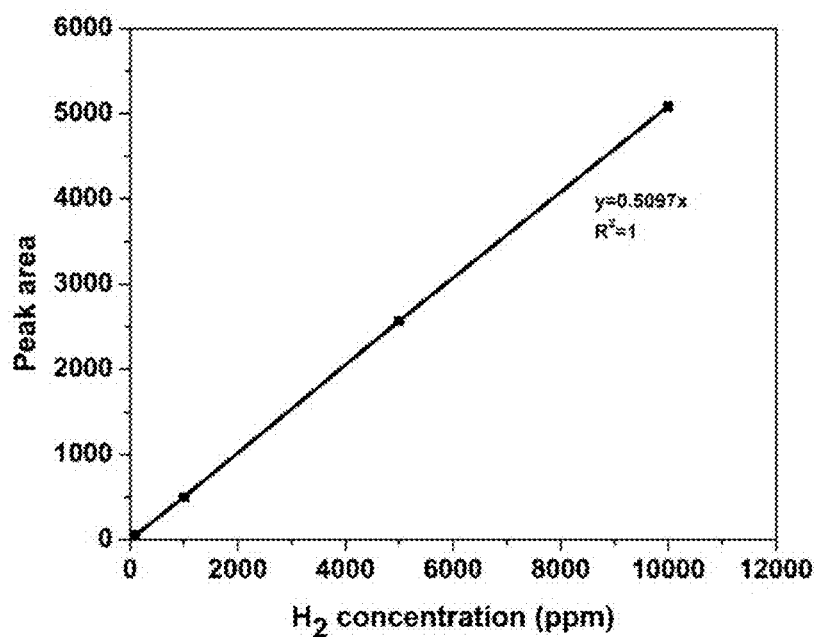


FIG. 14

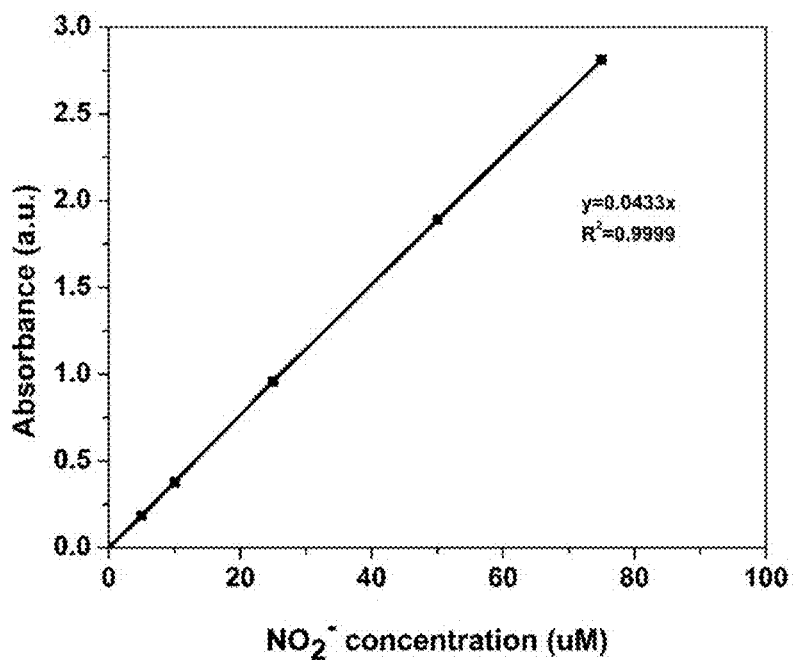


FIG. 15

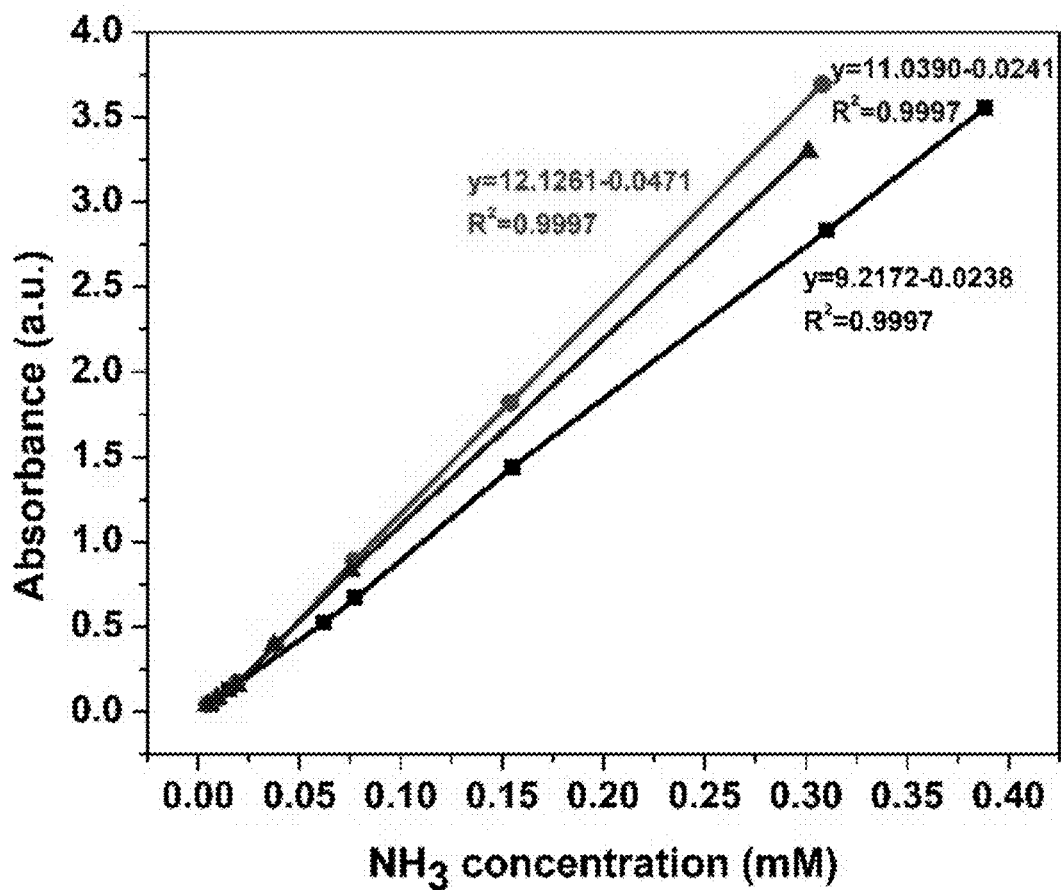


FIG. 16

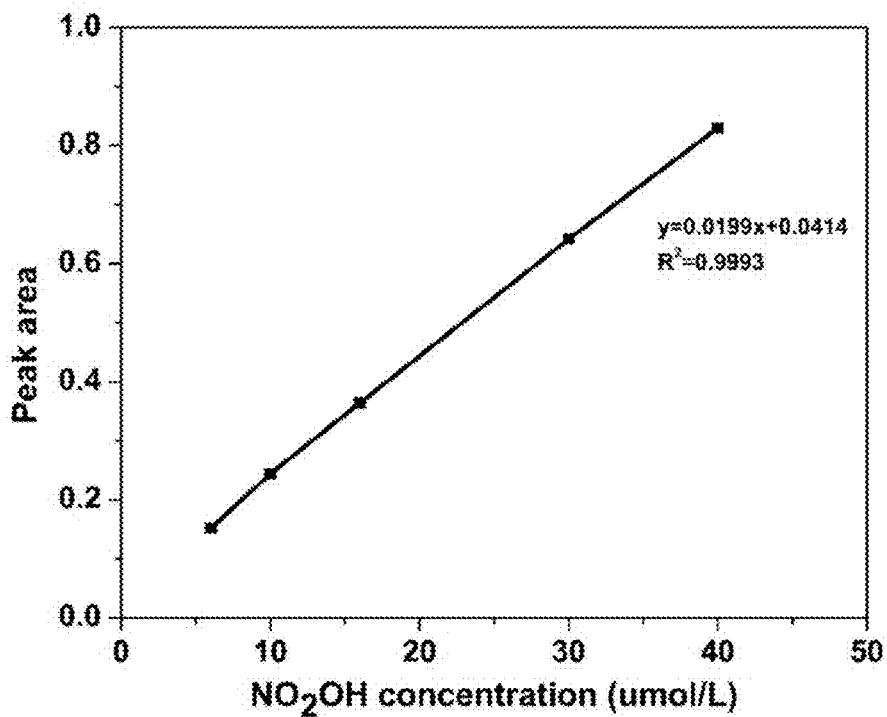


FIG. 17

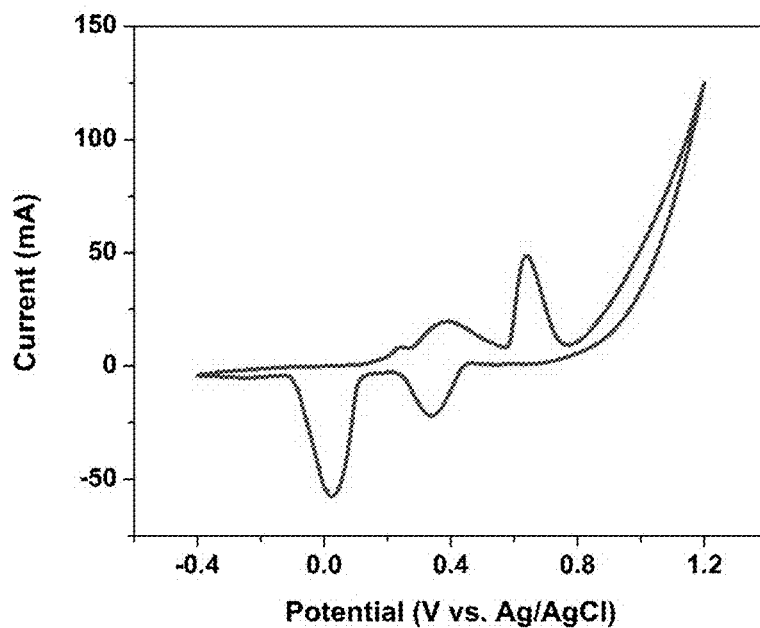


FIG. 18

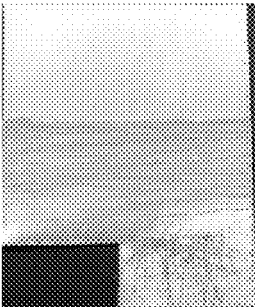


FIG. 19A

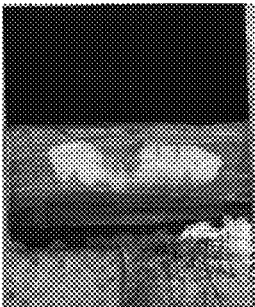


FIG. 19B

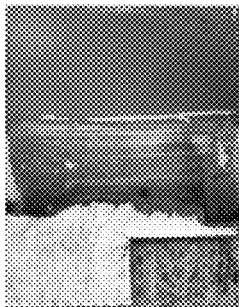


FIG. 19C

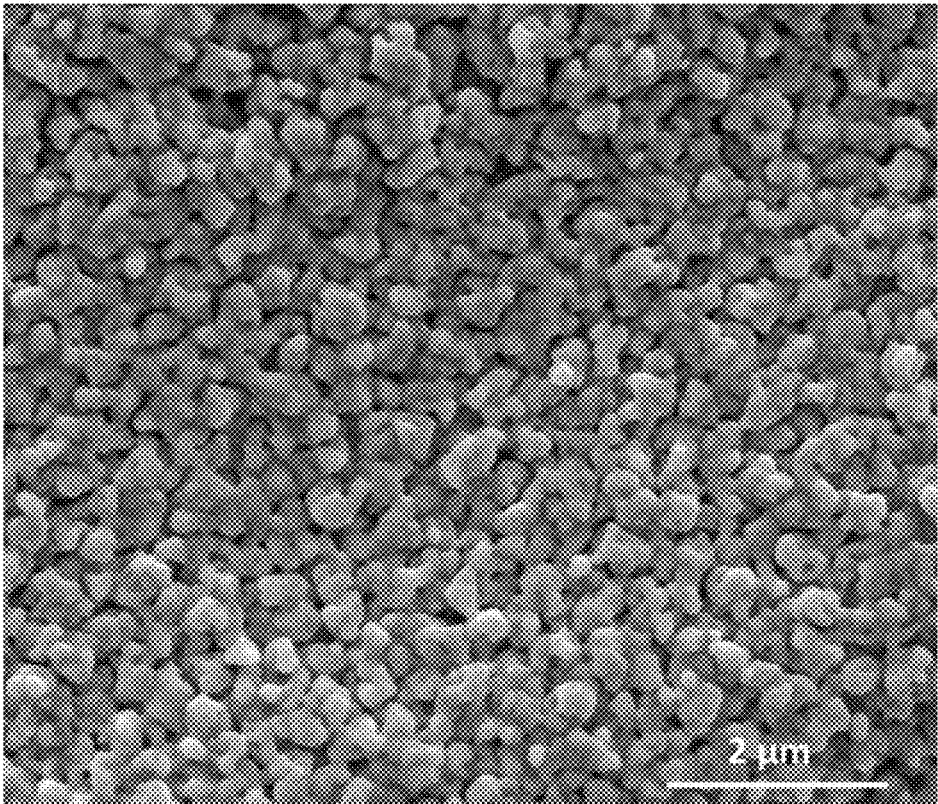


FIG. 20A

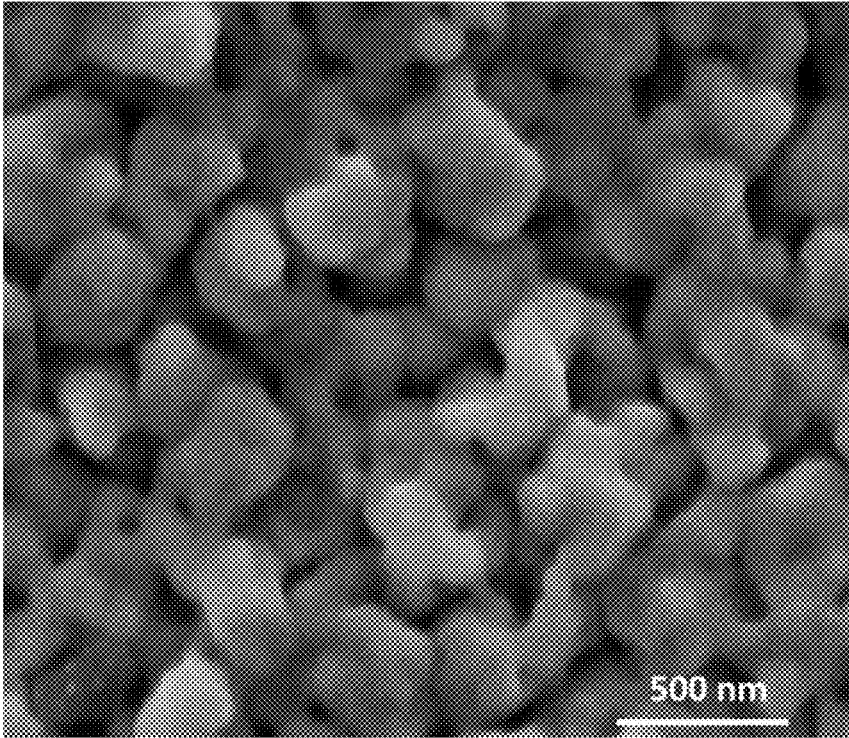


FIG. 20B

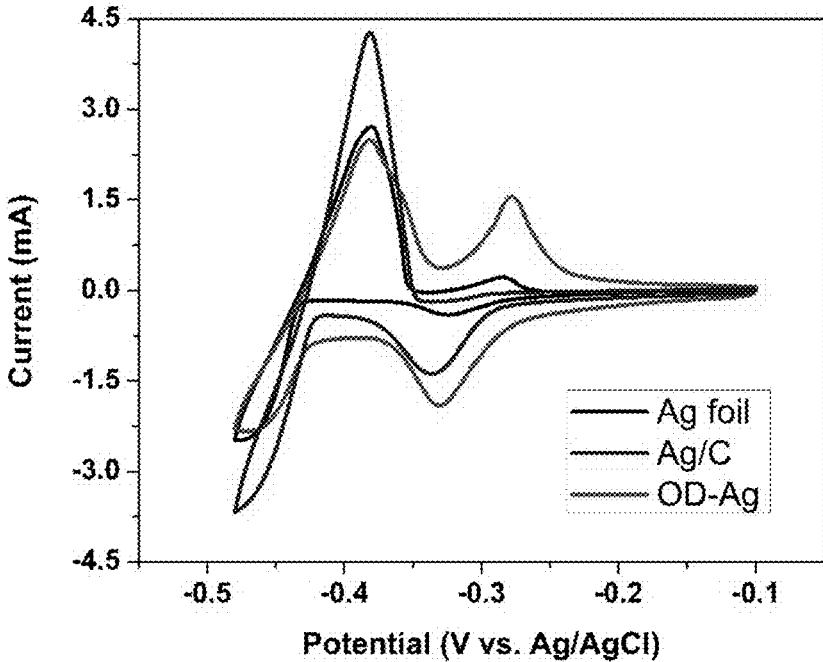


FIG. 21

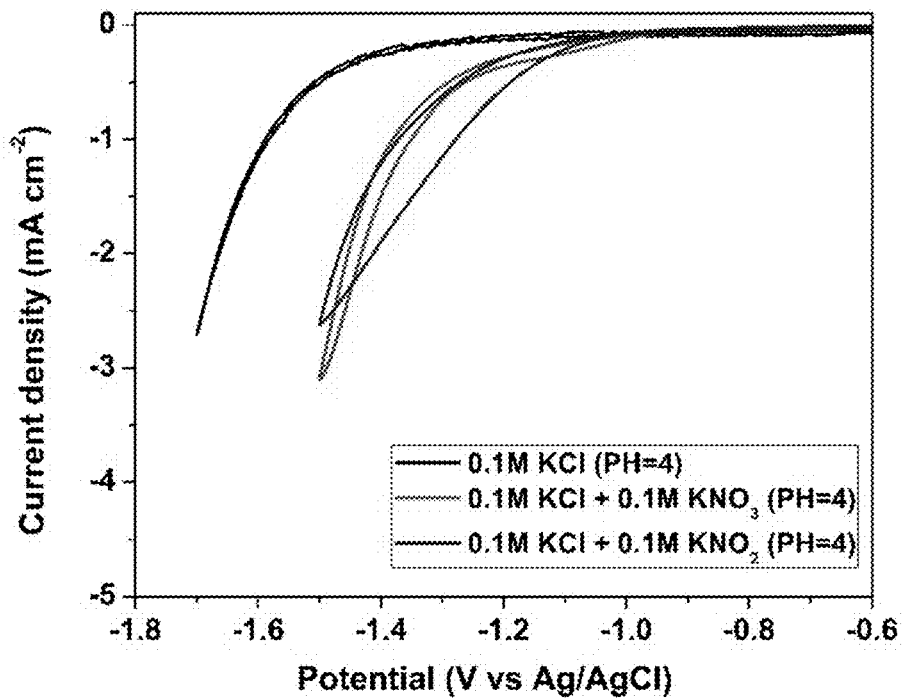


FIG. 22

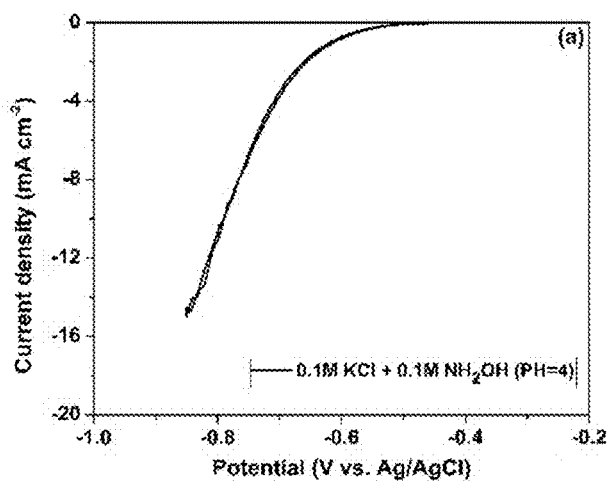


FIG. 23A

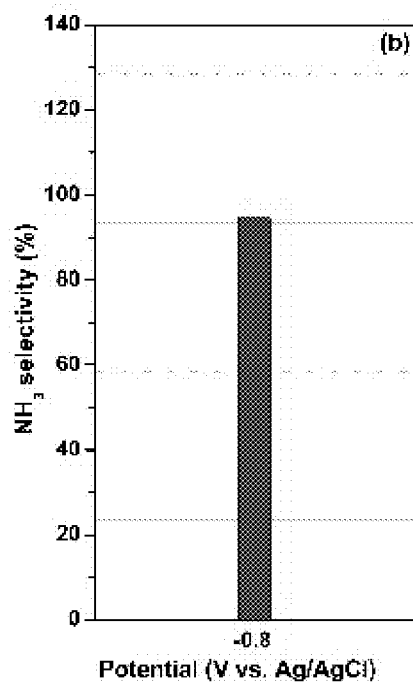


FIG. 23B

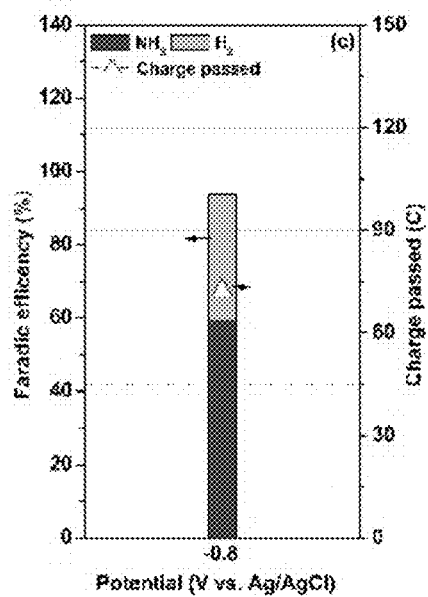


FIG. 23C

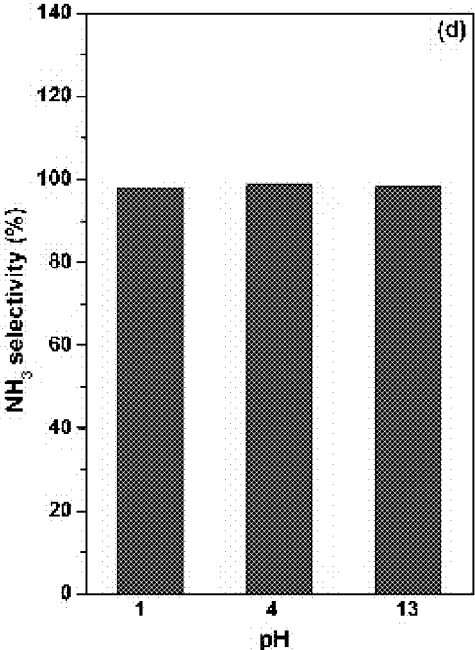


FIG. 23D

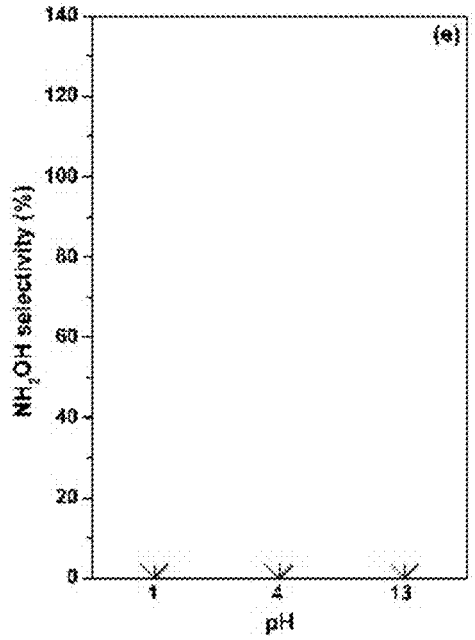


FIG. 23E

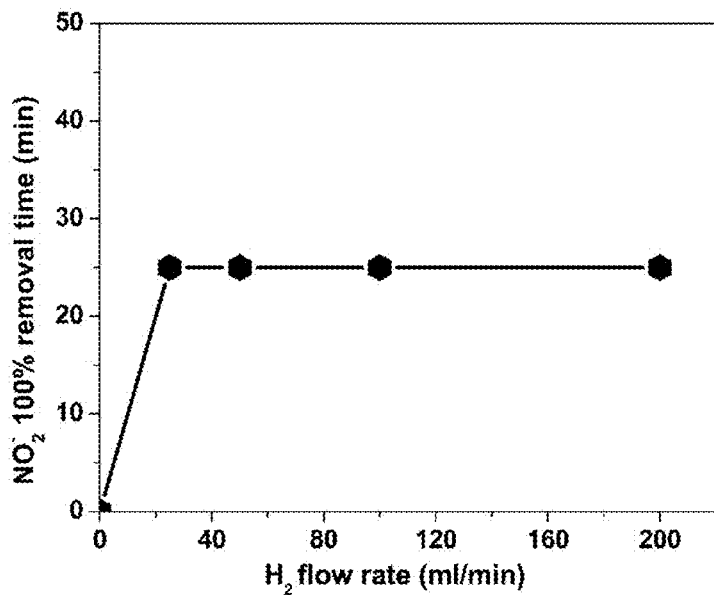


FIG. 24

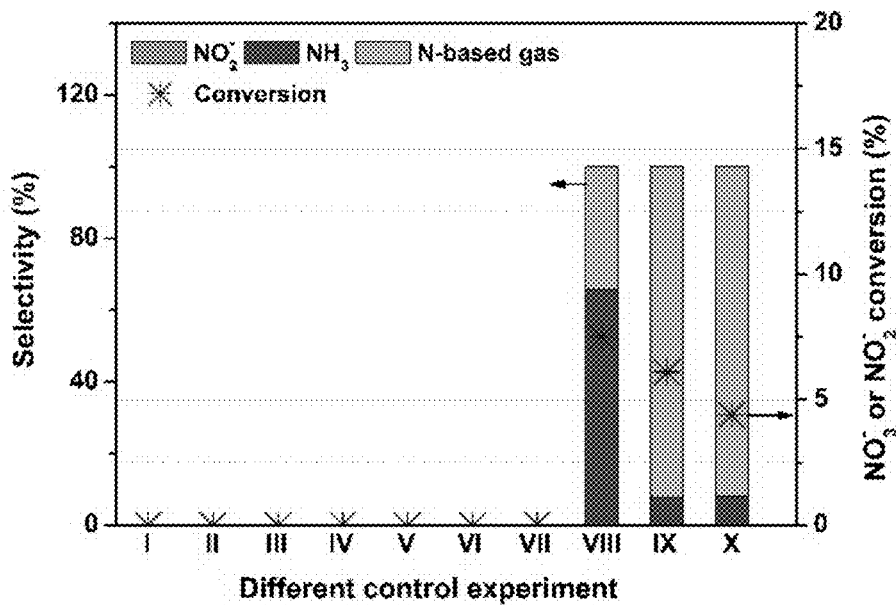


FIG. 25

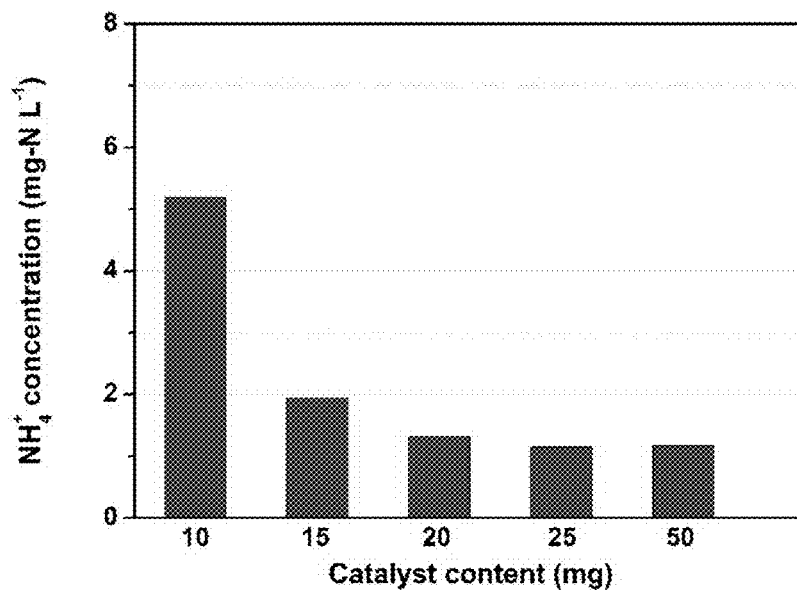


FIG. 26

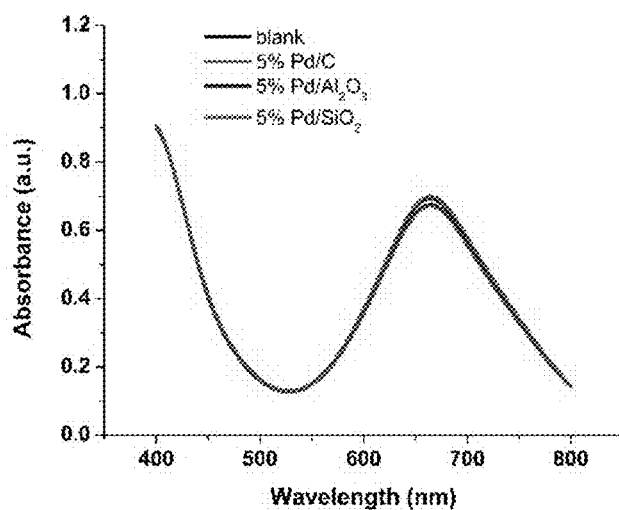


FIG. 27A

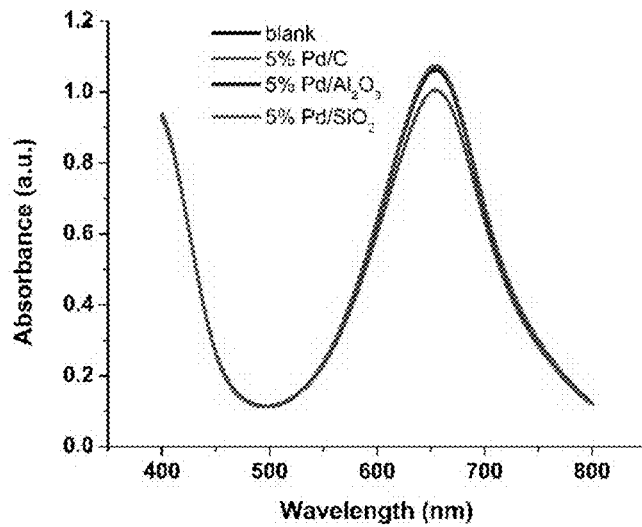


FIG. 27B

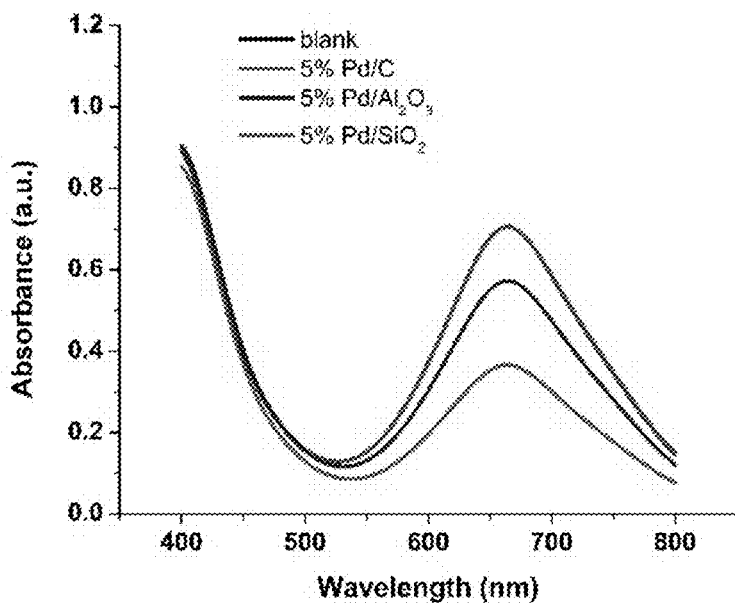


FIG. 27C

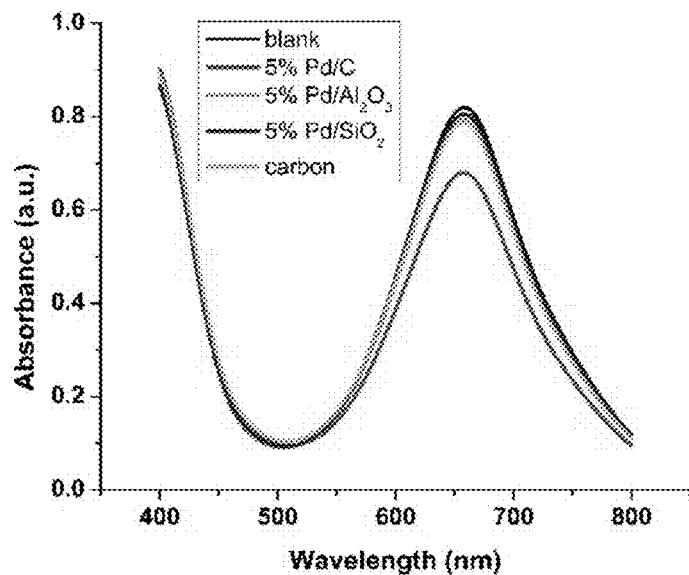


FIG. 27D

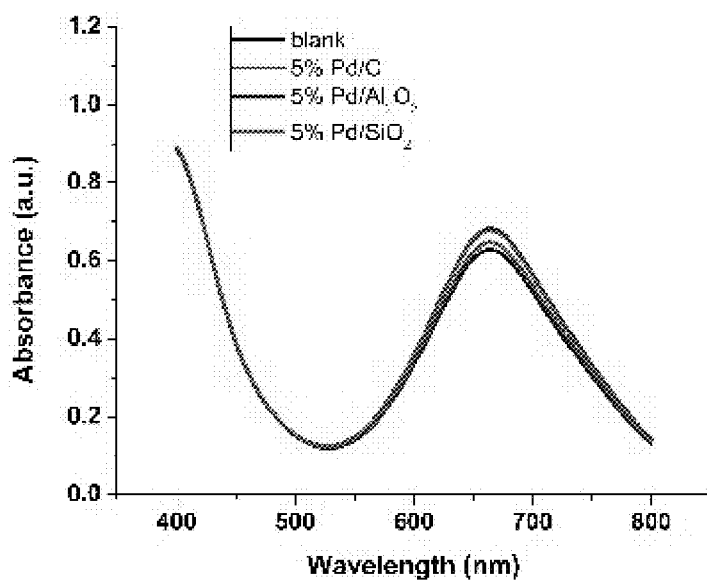


FIG. 28A

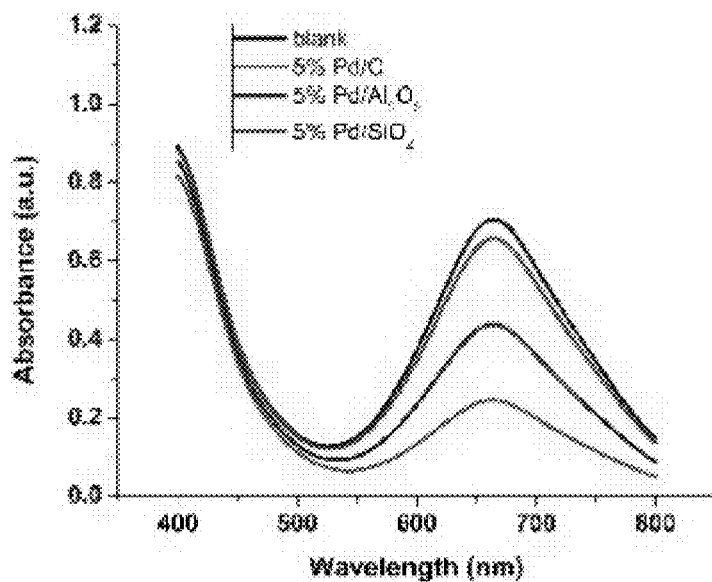


FIG. 28B

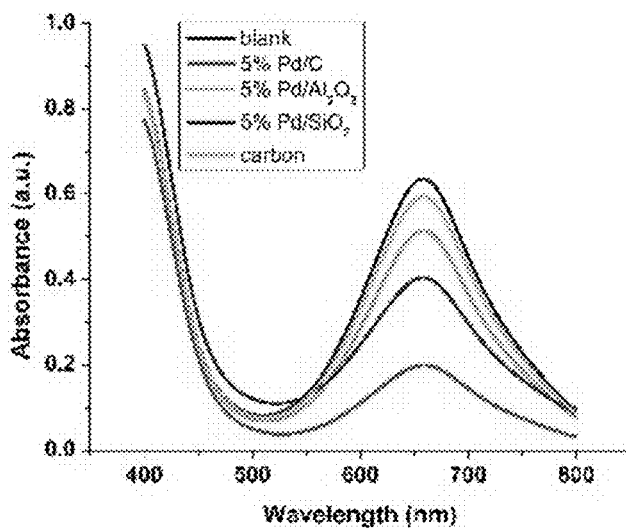


FIG. 28C

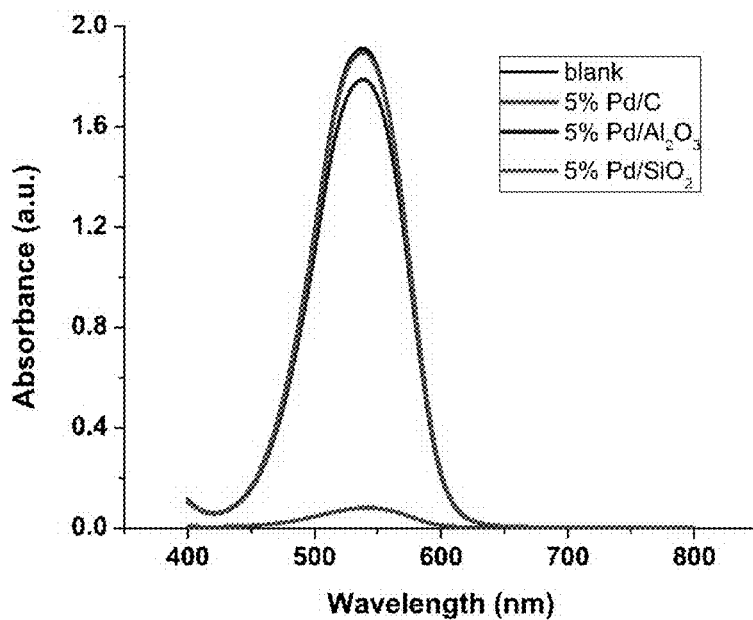


FIG. 29


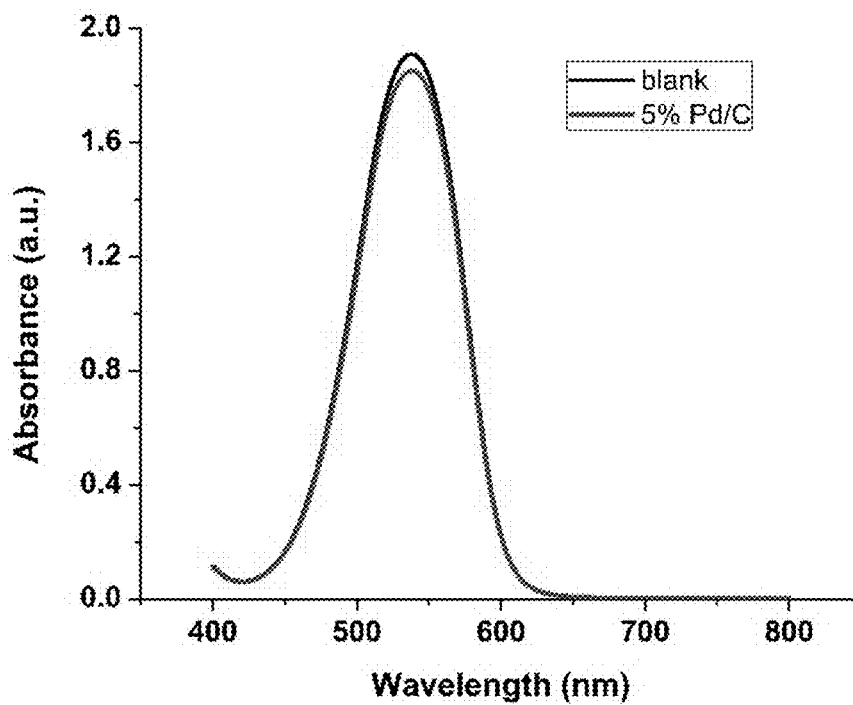


FIG. 30

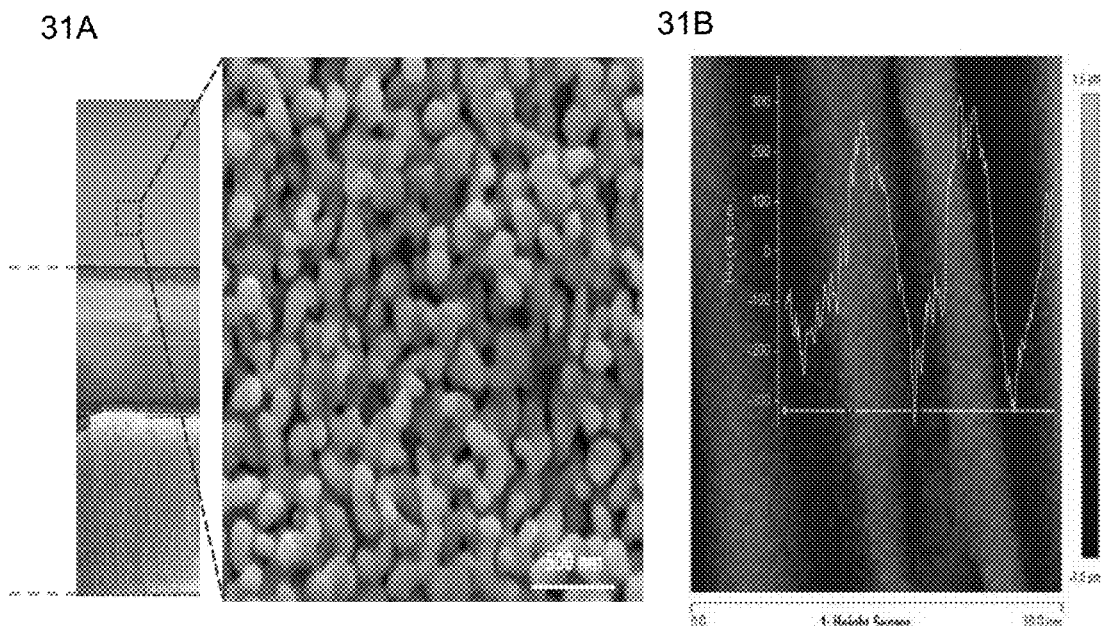

FIGS. 31A-31B

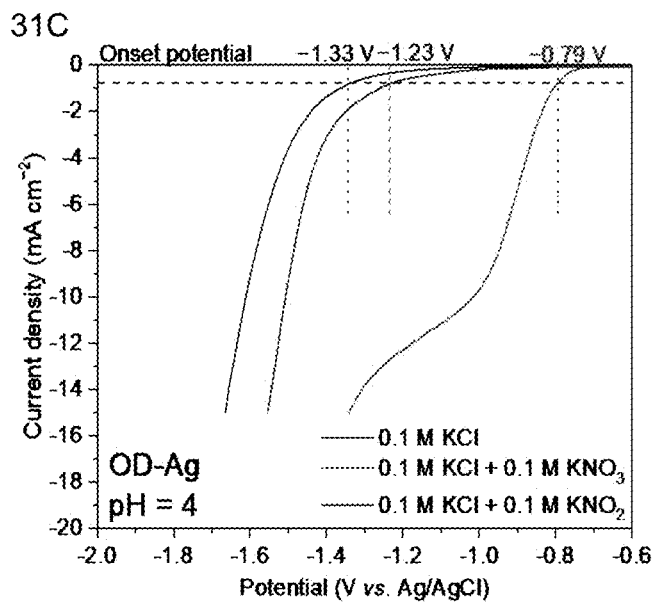


FIG. 31C

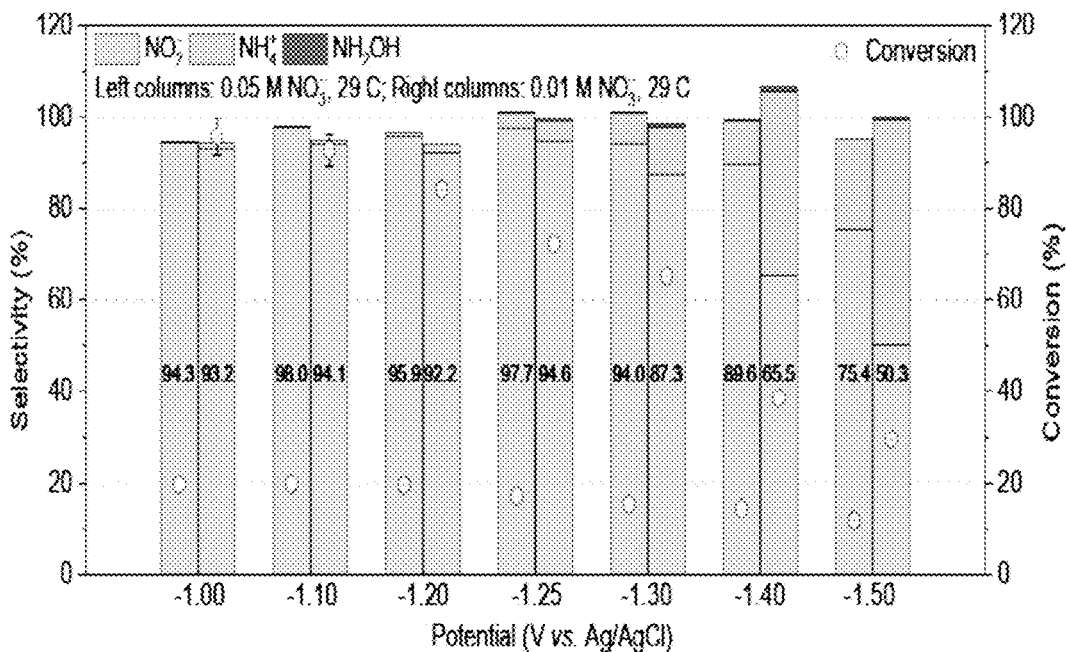


FIG. 31D


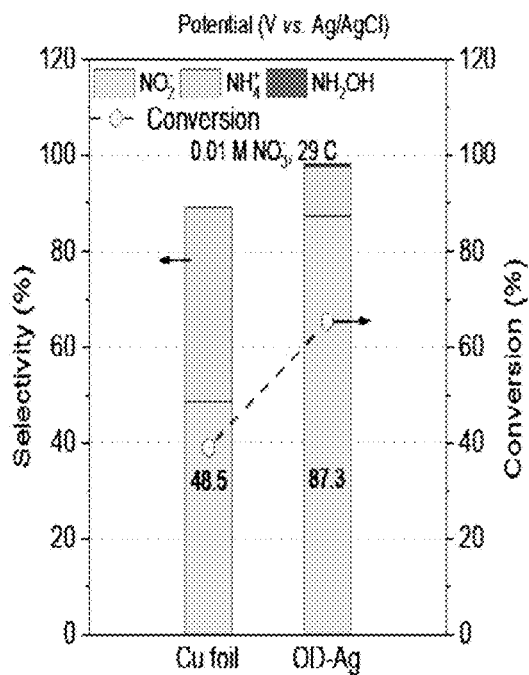


FIG. 31E

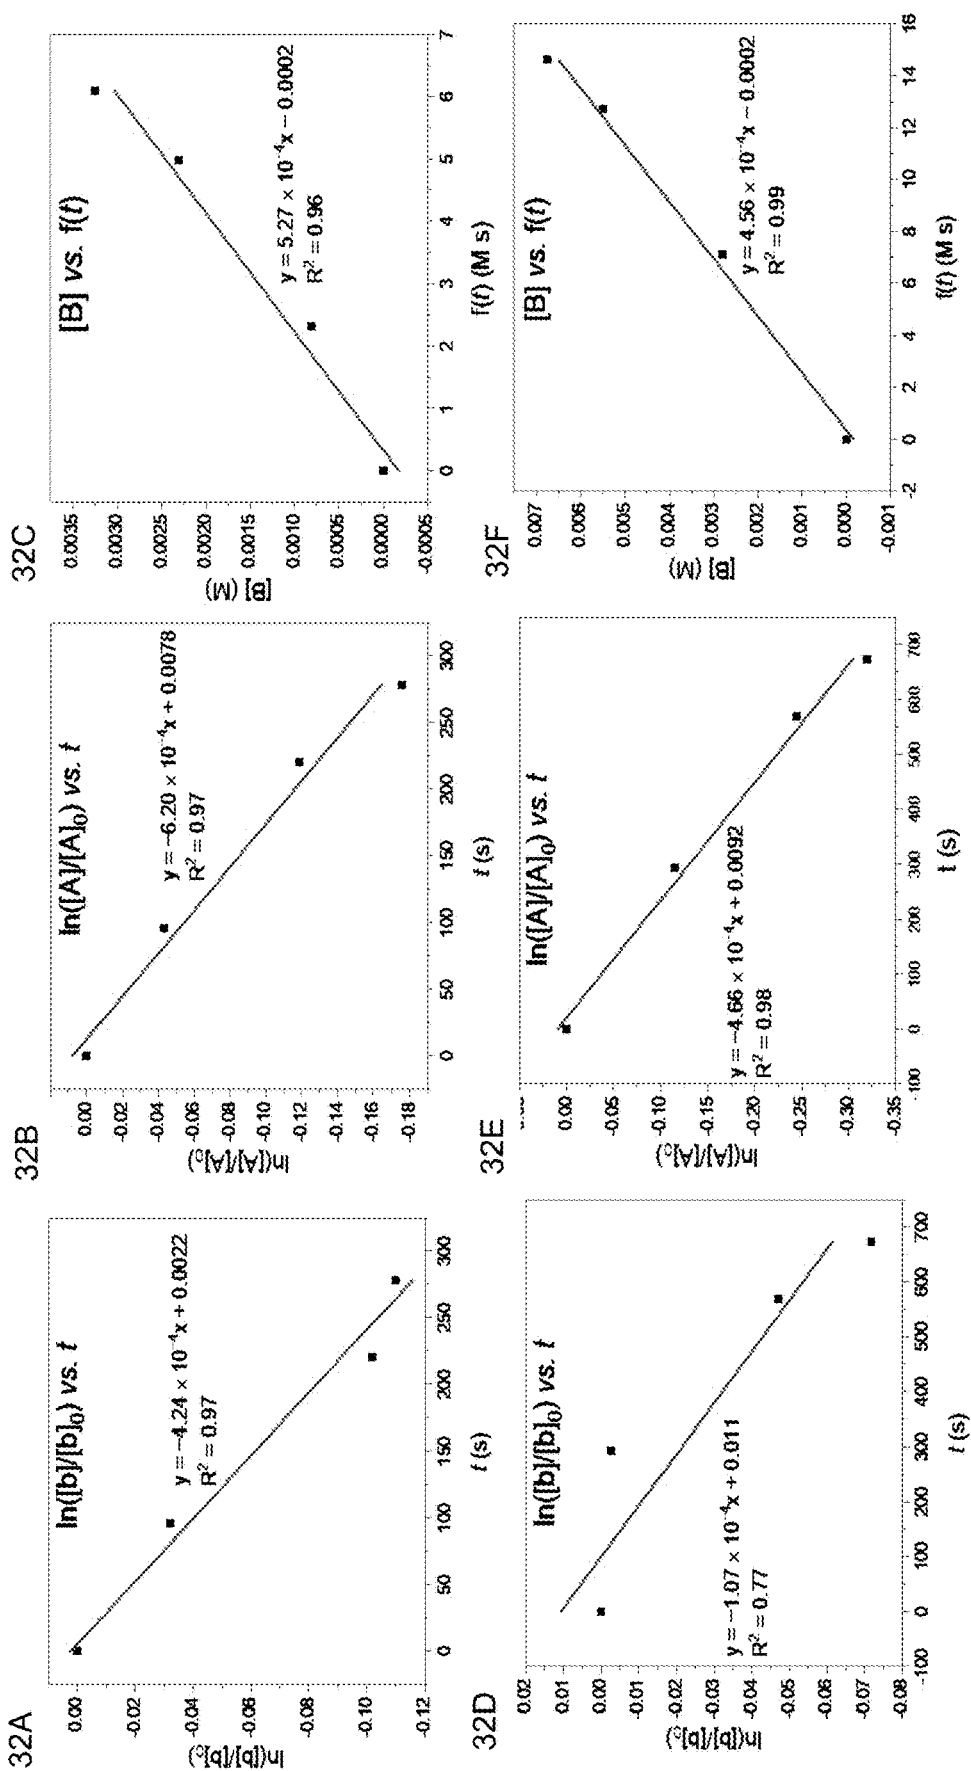

FIGS. 32A-32F

Potential (V vs. Ag/AgCl)	k_1 (min ⁻¹)	k_2 (min ⁻¹)	k_3 (min ⁻¹)	R ² for k_2	R ² for ($k_1 + k_3$)	R ² for k_1
-1.50	0.0316	0.0255	0.0056	0.97	0.97	0.96
-1.30	0.0273	0.00643	0.0007	0.77	0.98	0.99

FIG. 32G

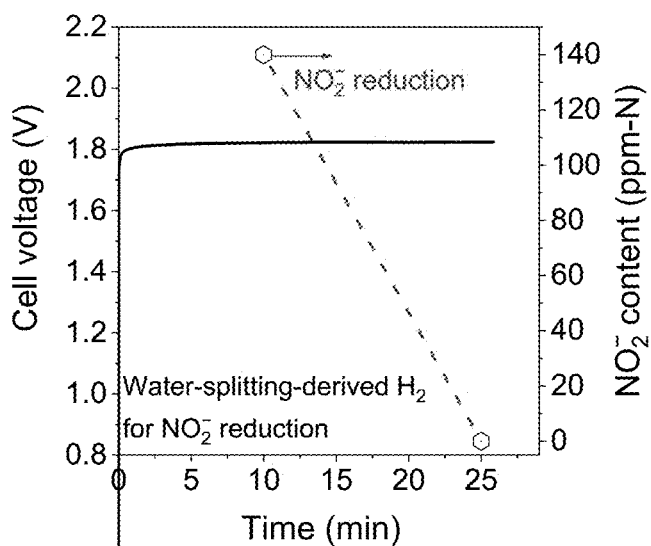


FIG. 33A

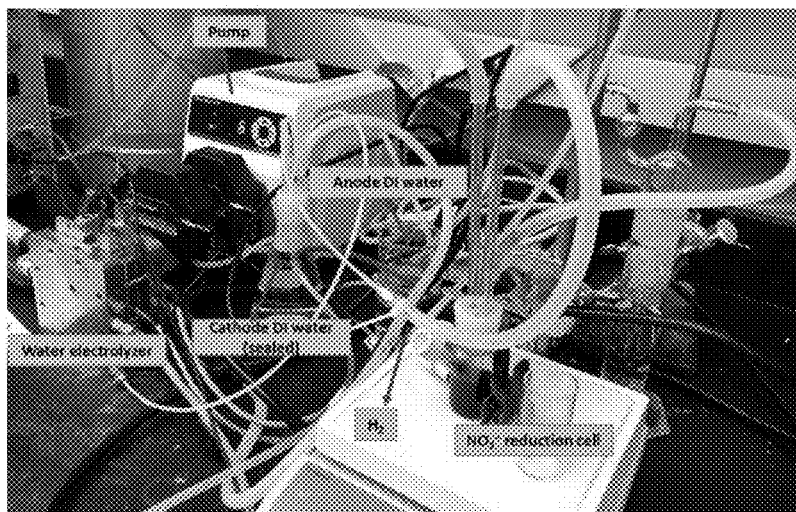


FIG. 33B

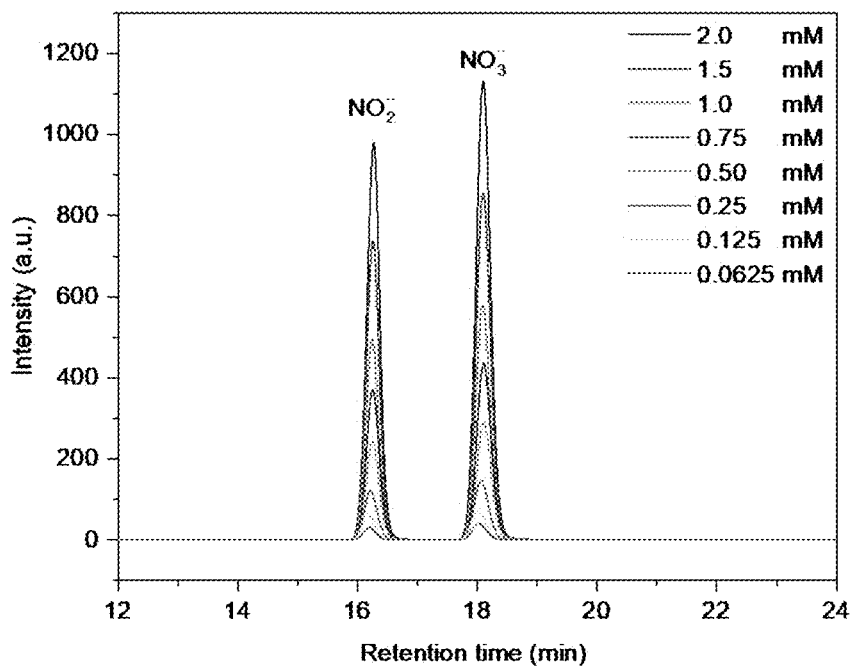


FIG. 34A



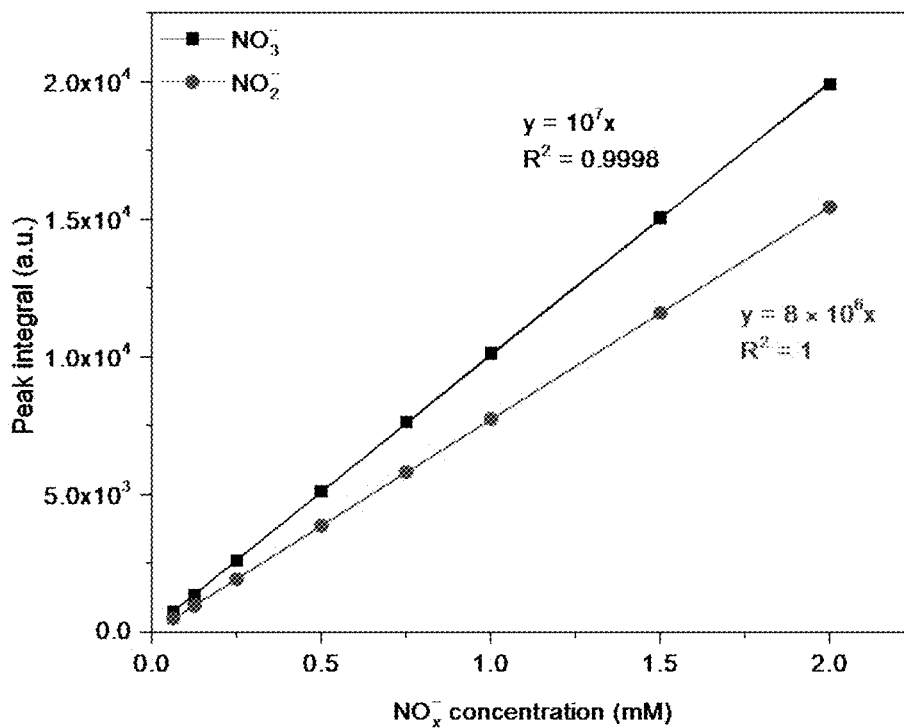


FIG. 34B


35A

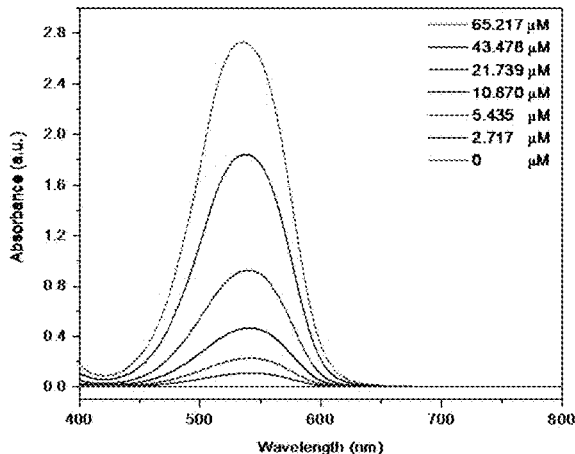


35B

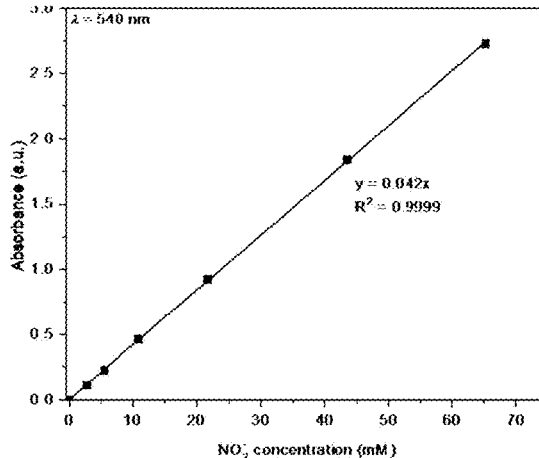


35C

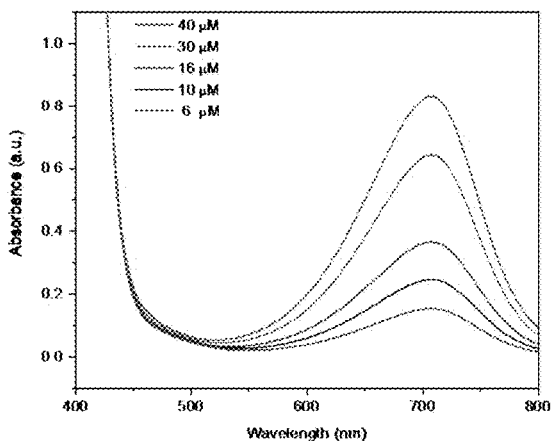


35D

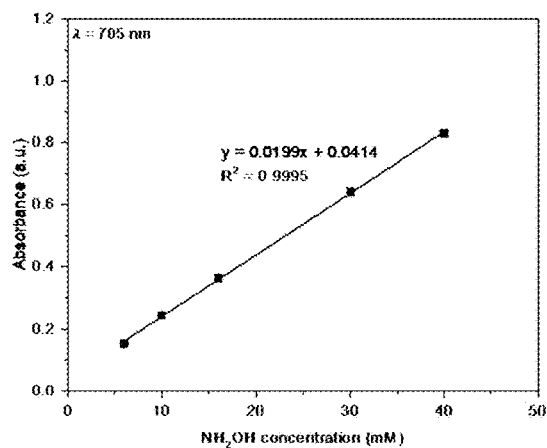

35E

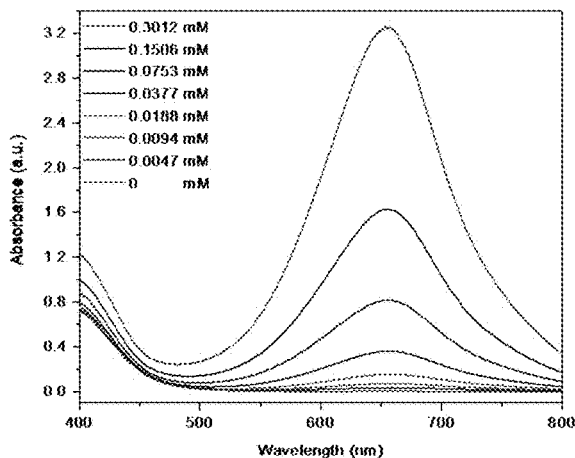

35F

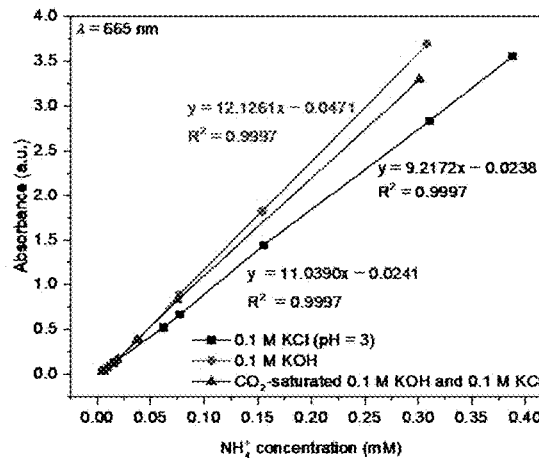

FIGs. 35A-35F

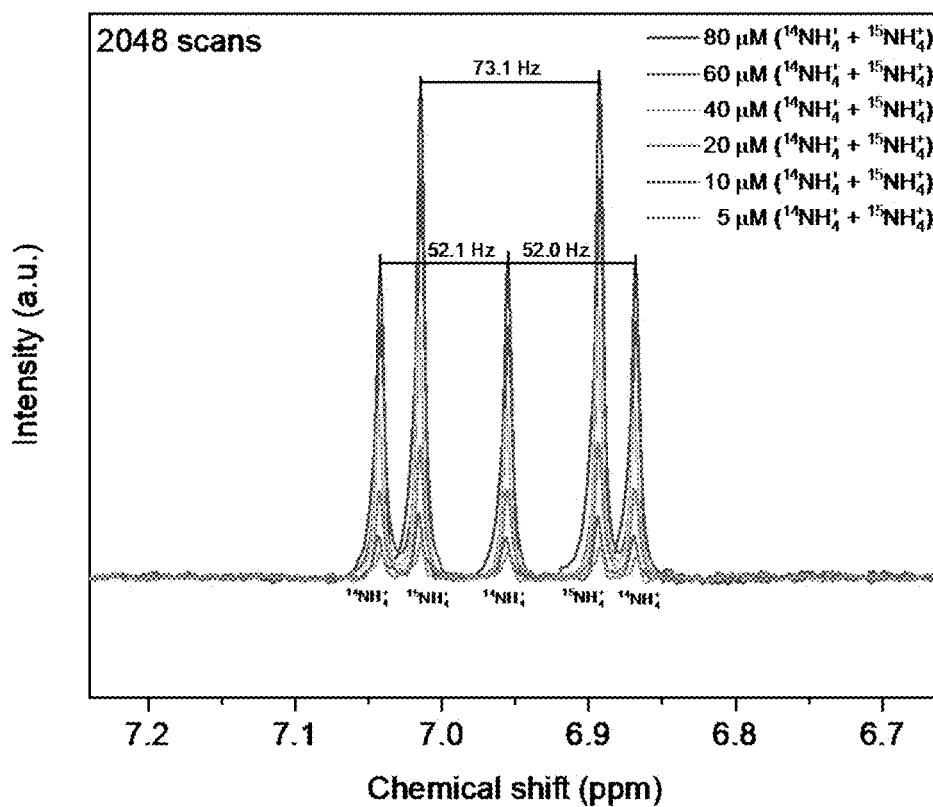


FIG. 36A





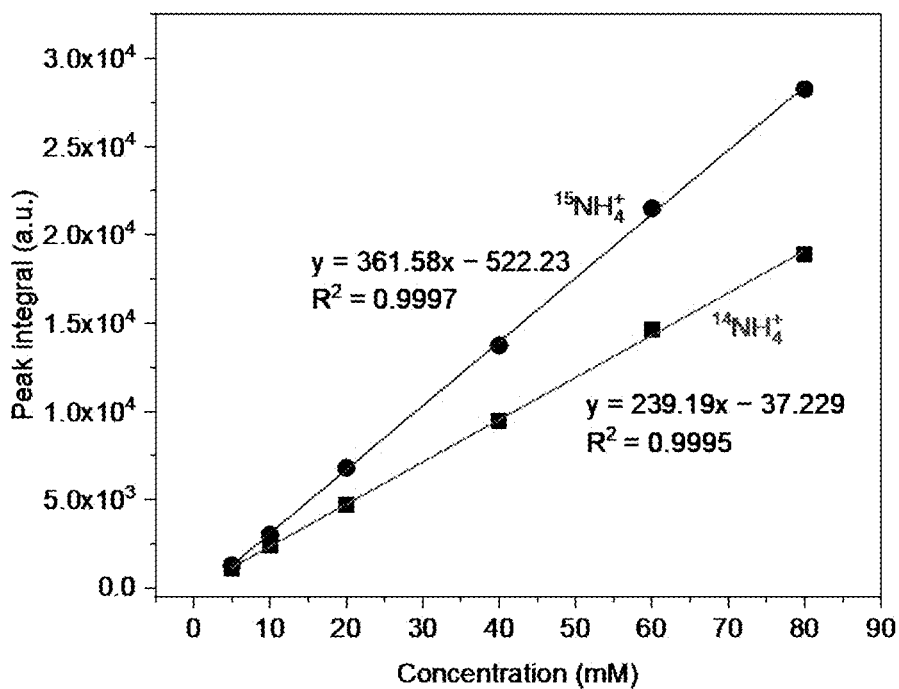



FIG. 36B

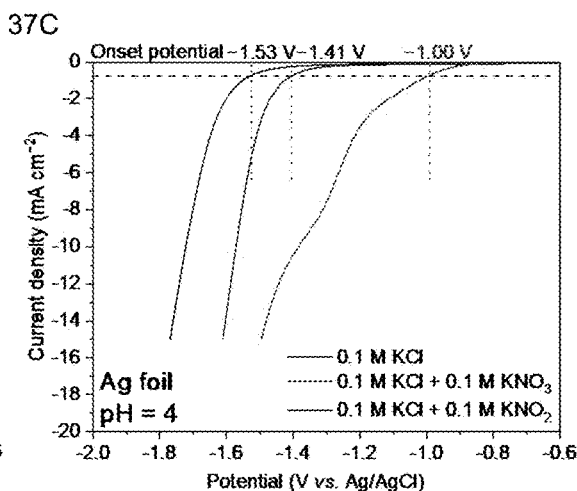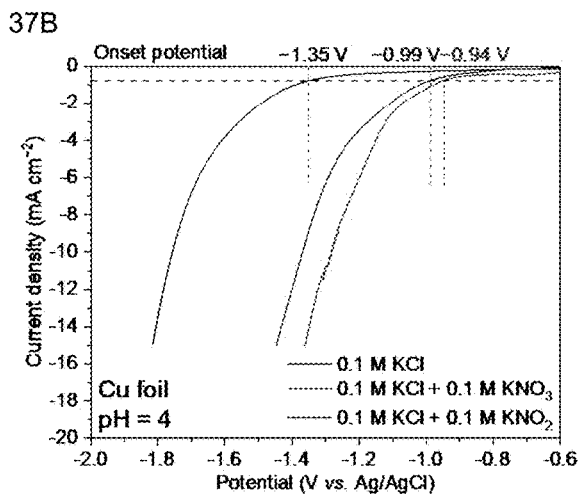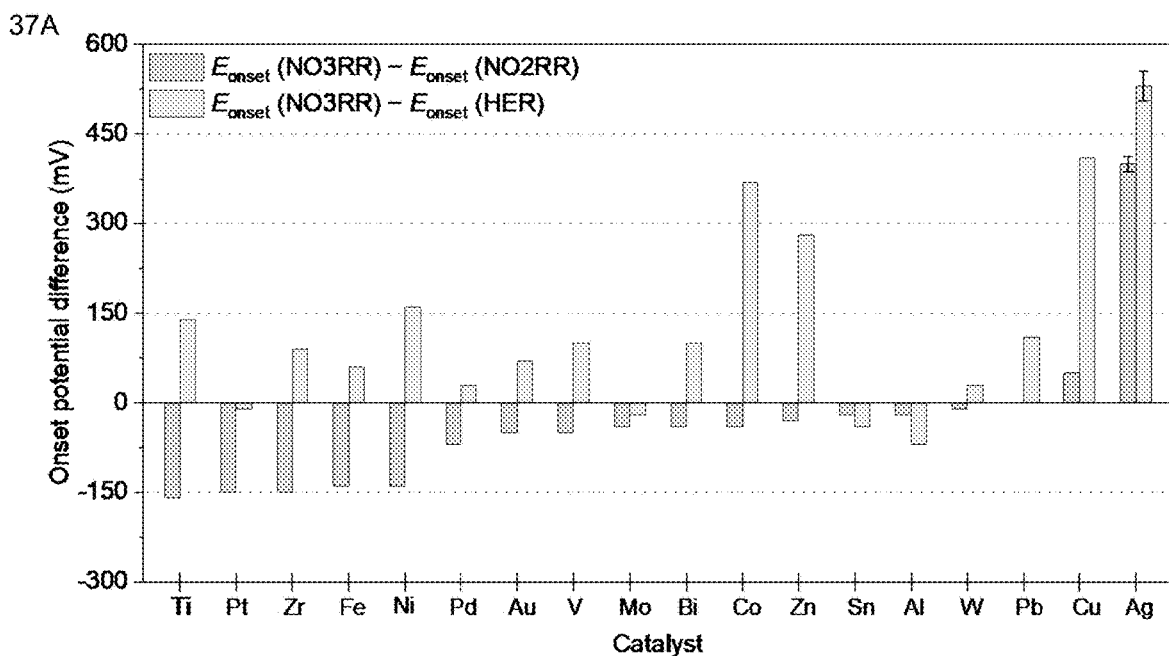

FIGs. 37A-37C

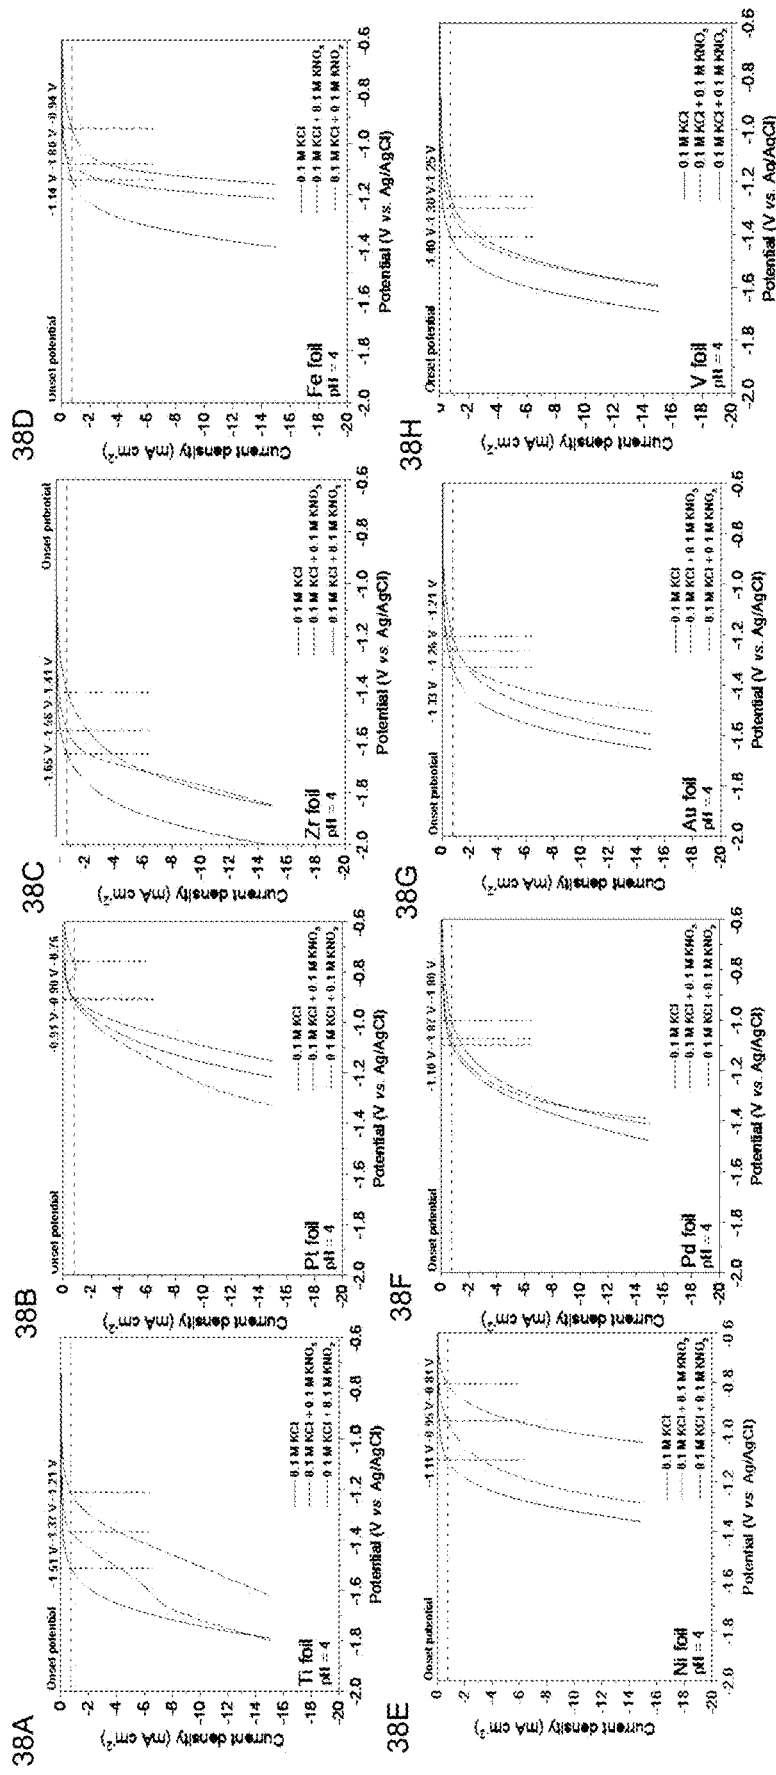

FIGS. 38A-38H

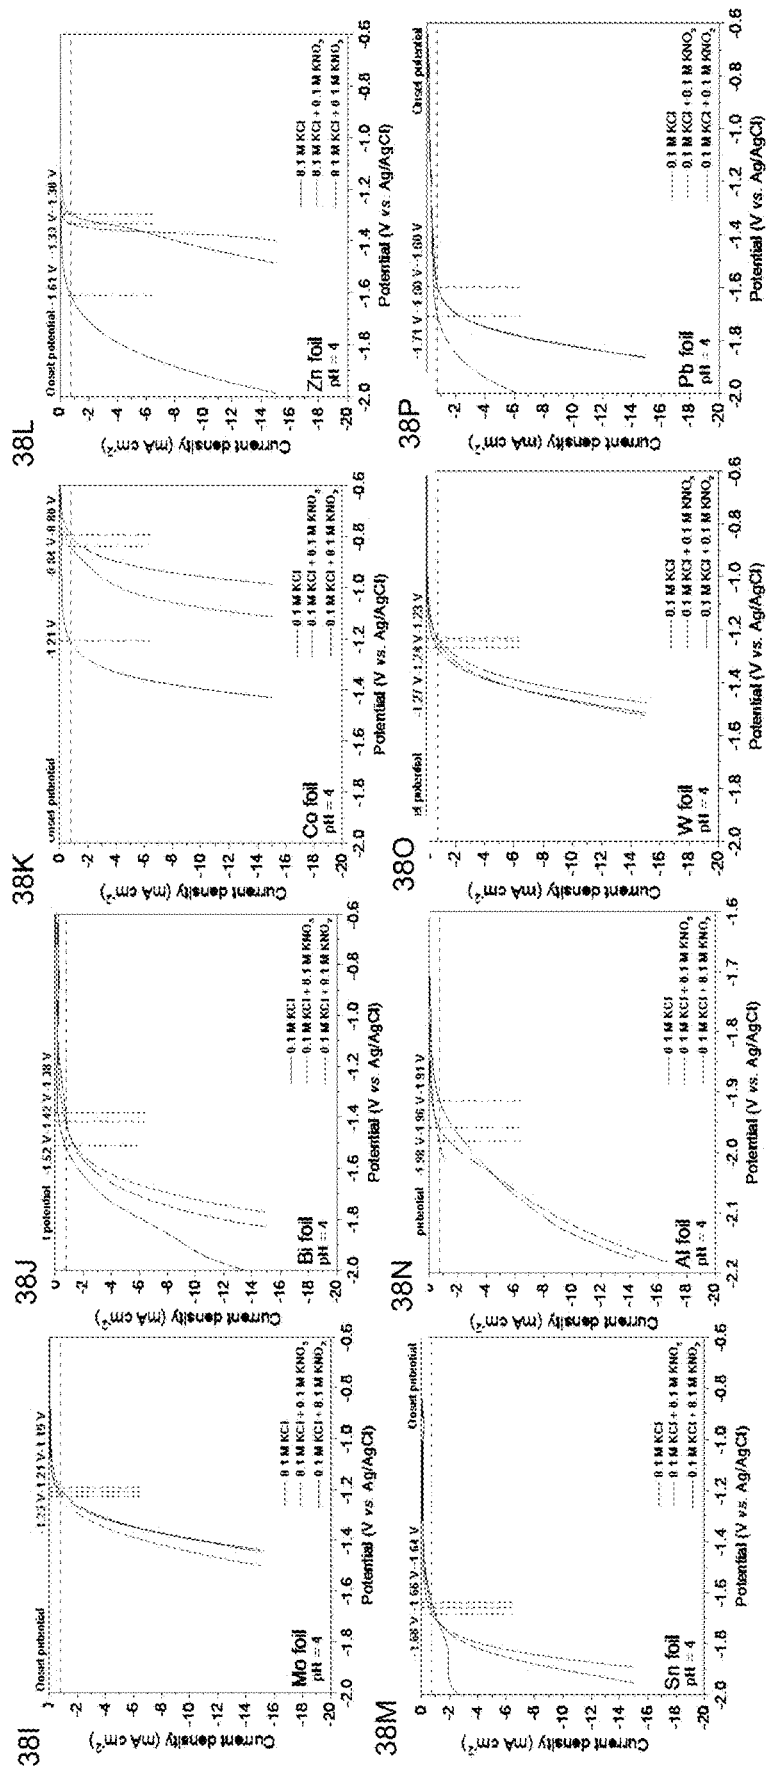

FIGS. 38I-38P

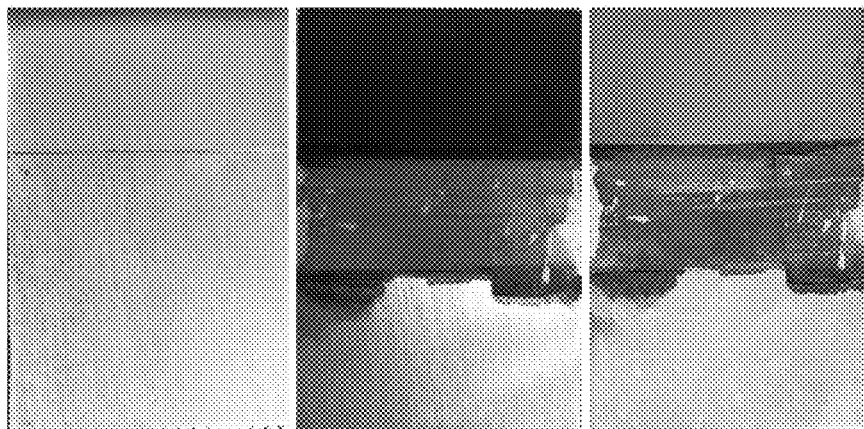


FIG. 39A

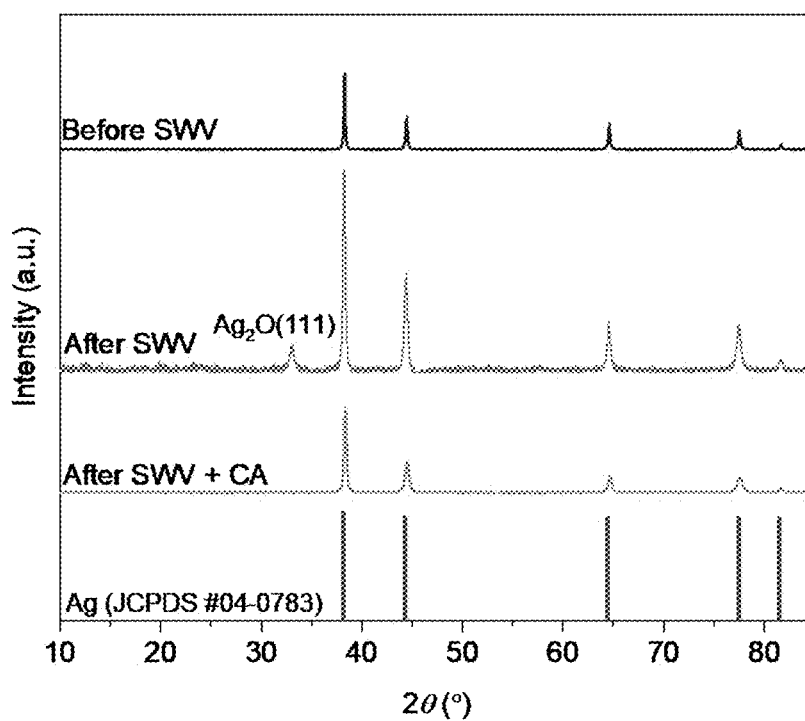


FIG. 39B


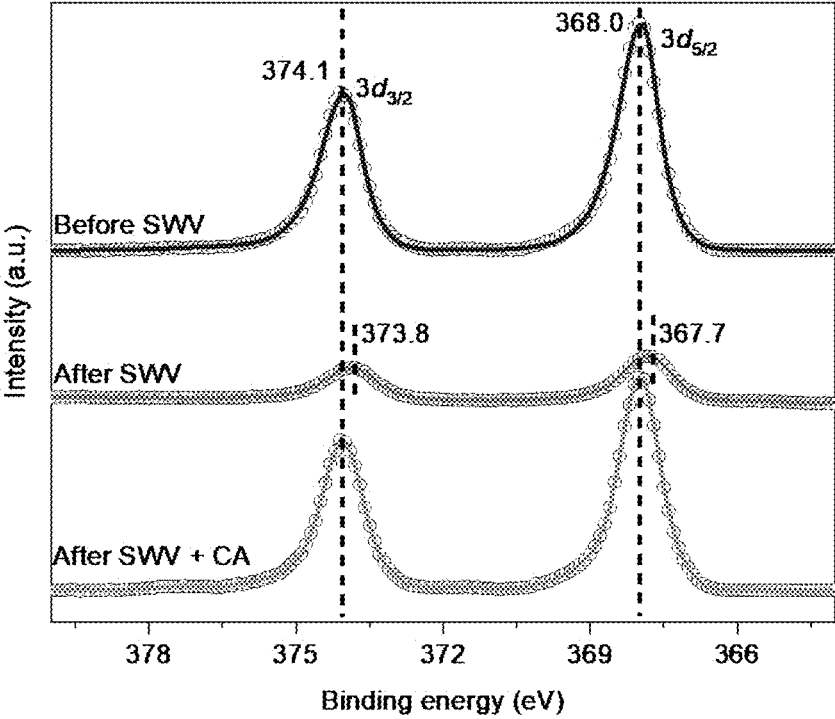


FIG. 39C

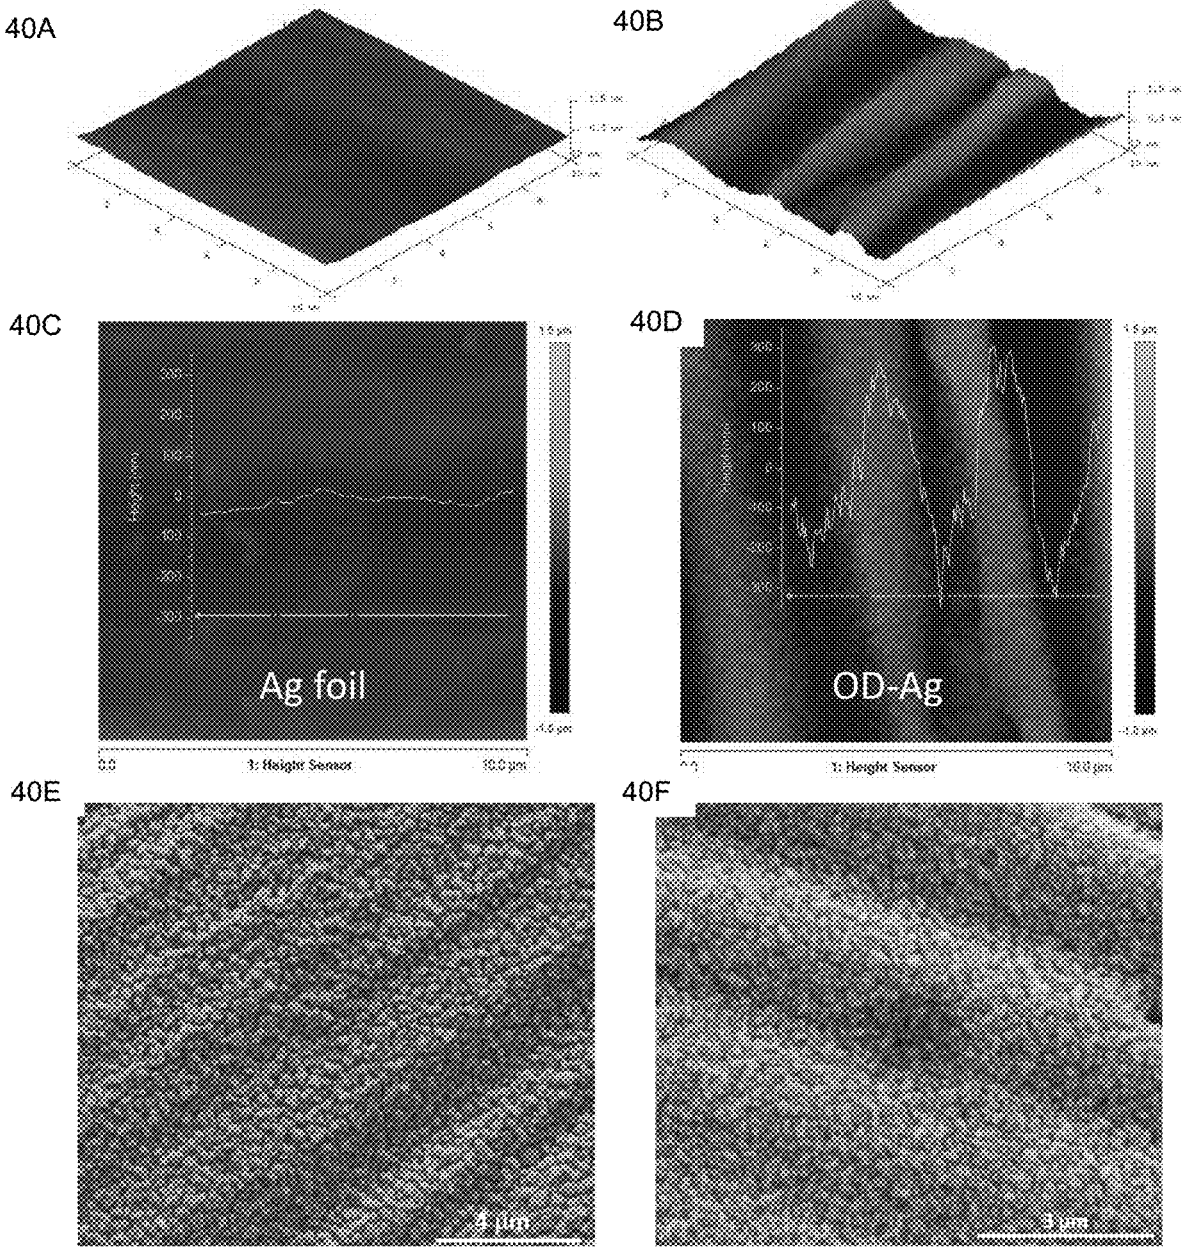

FIGS. 40A-40F

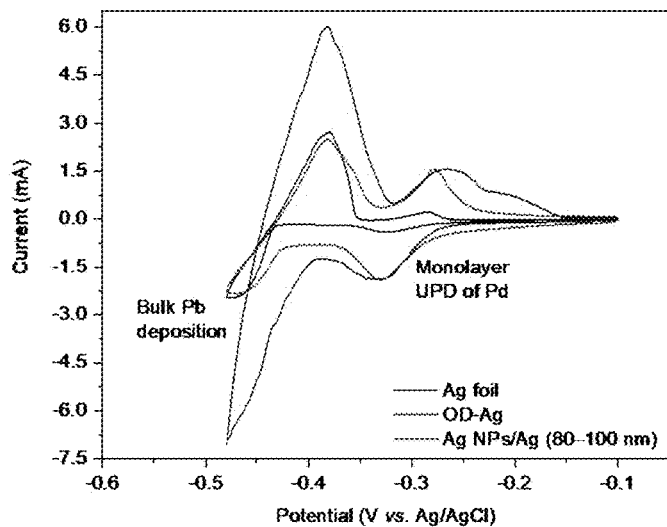


FIG. 41A

Material	Preparation condition	Geometric area (cm ²)	ECSA (cm ²)
Ag foil	N/A	2	2.1
Ag NPs/Ag (80-100 nm)	Spray-coating	2	25.9
OD-Ag	SWV + CA	2	27.1

FIG. 41B

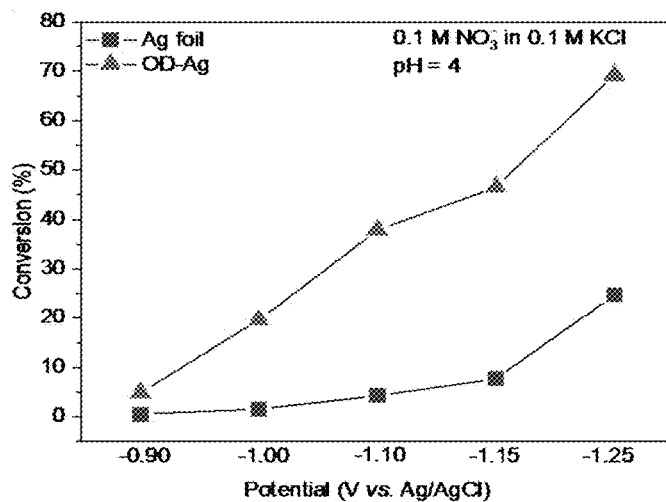


FIG. 42A

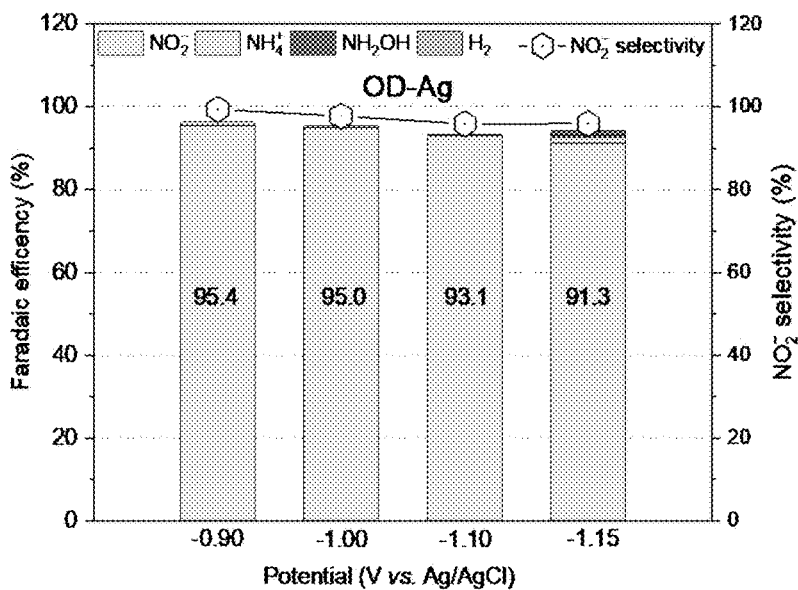


FIG. 42B

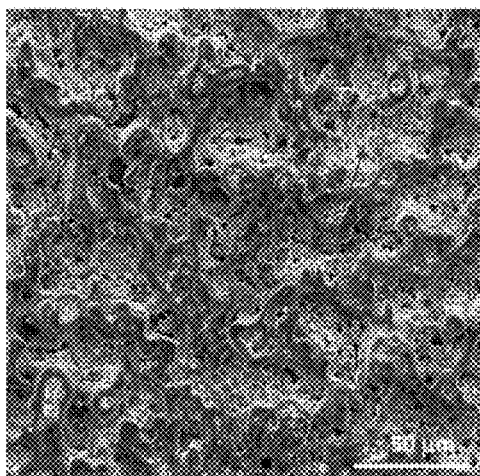


FIG. 43A

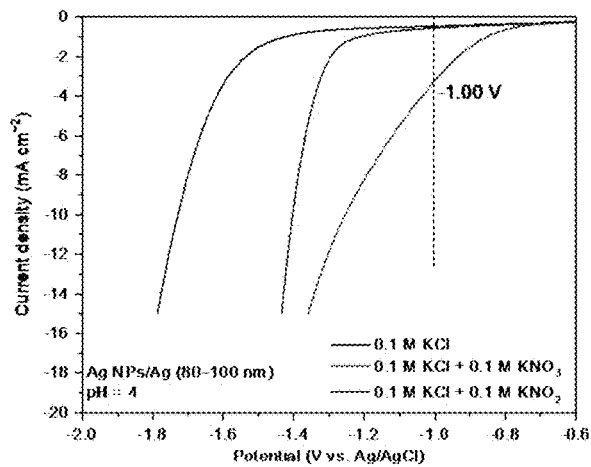


FIG. 43B

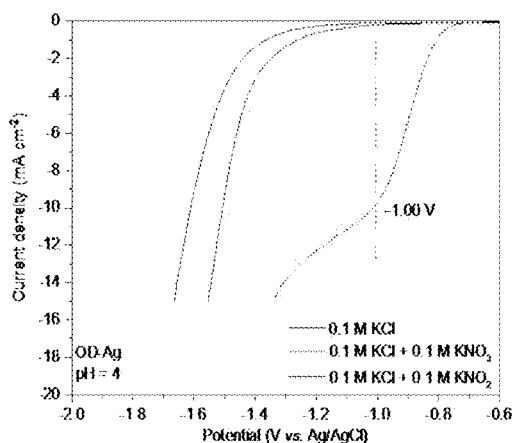


FIG. 43C

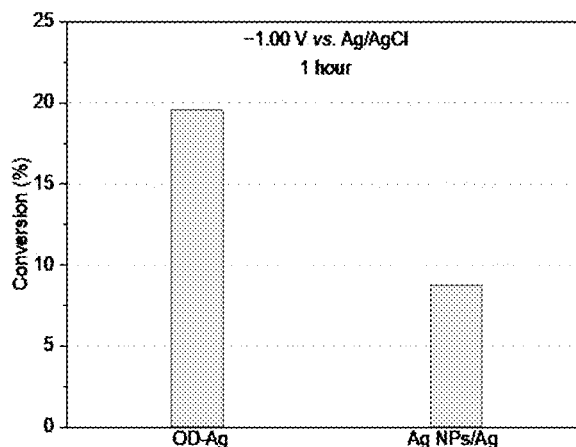


FIG. 43D

Electrode	Geometric area (cm ²)	ECSA (cm ²)	Current @-1.00 V (mA)	ECSA-specific current density (mA cm ⁻²)
Ag NPs/Ag (80-100nm)	4	51.80	-13.44	0.26
OD-Ag	4	54.20	-38.80	0.72

FIG. 43E

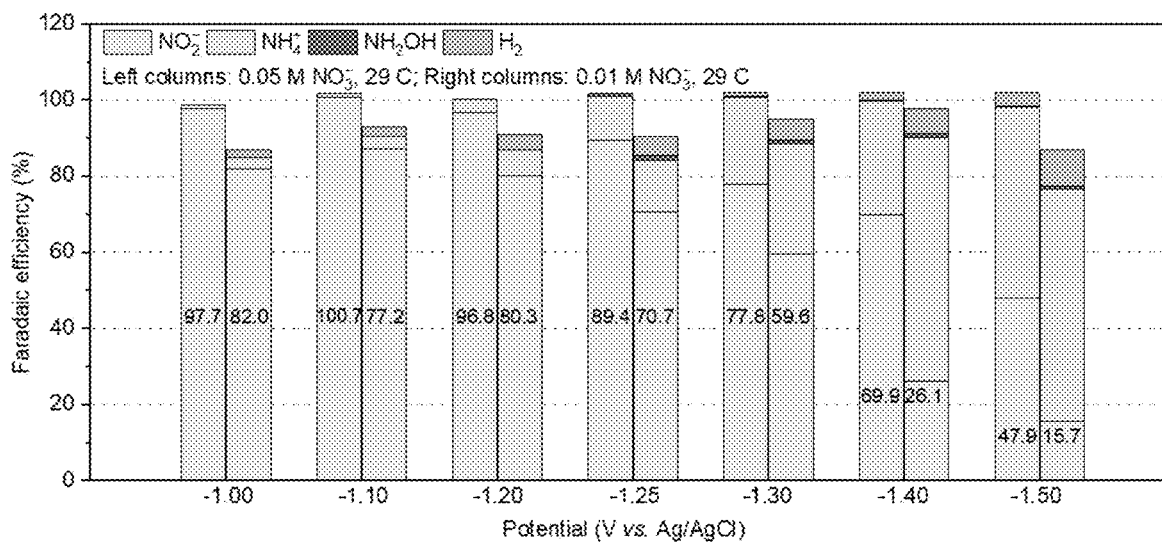


FIG. 44

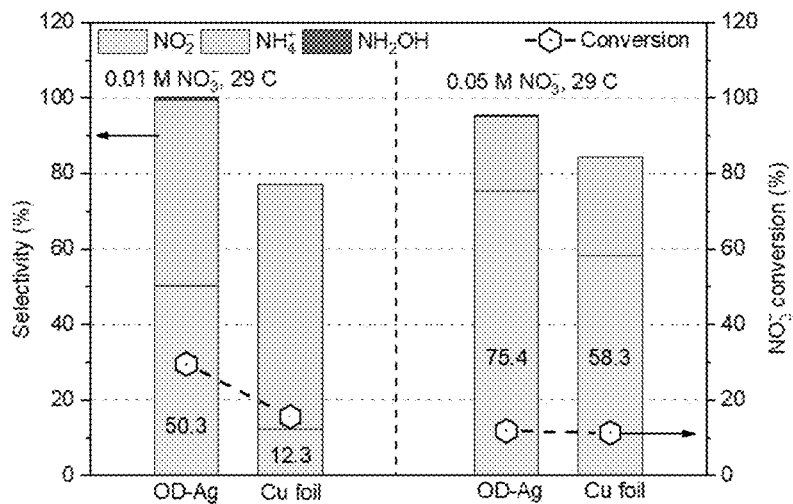


FIG. 45

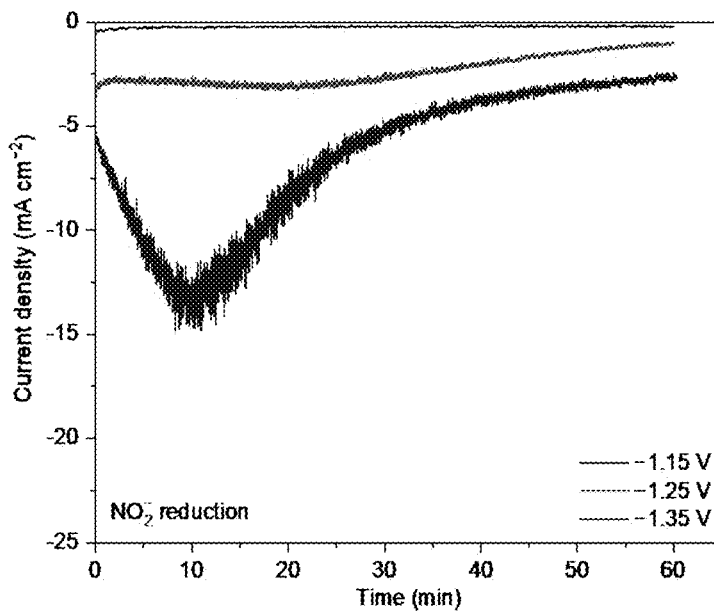


FIG. 46A

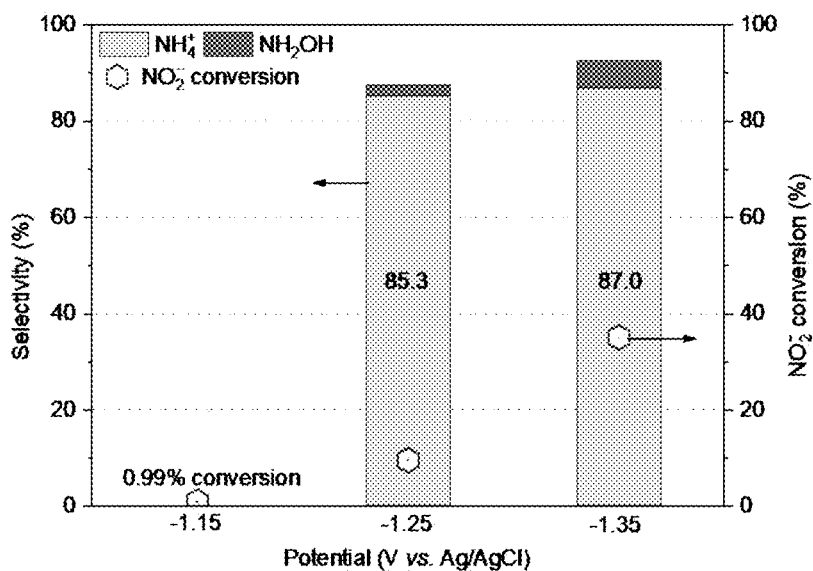


FIG. 46B

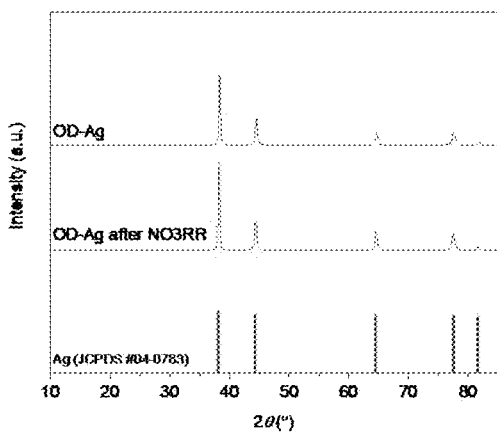


FIG. 47A

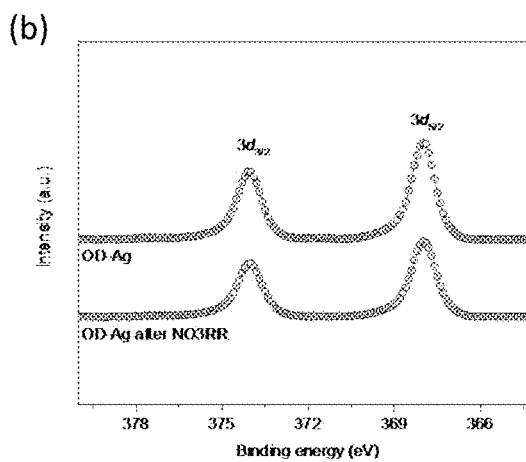


FIG. 47B

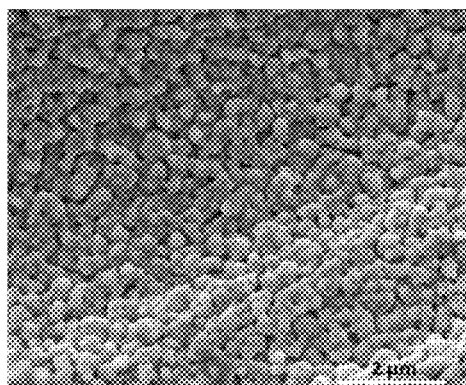


FIG. 47C

Sample	Ag ⁺ concentration (ppb)
Ag foil	4.90
OD-Ag	4.86

FIG. 47D

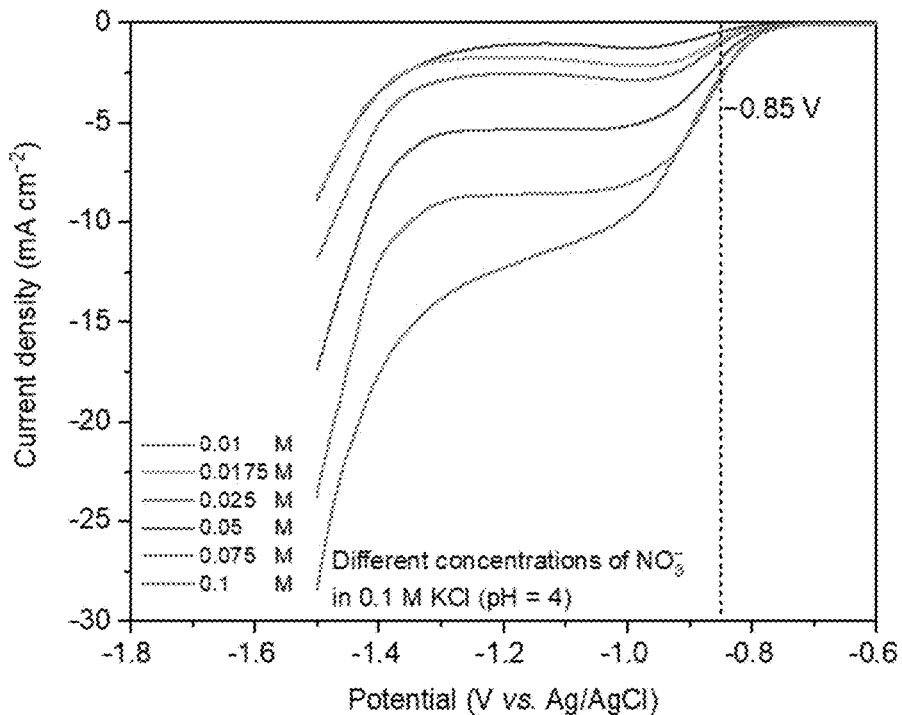


FIG. 48

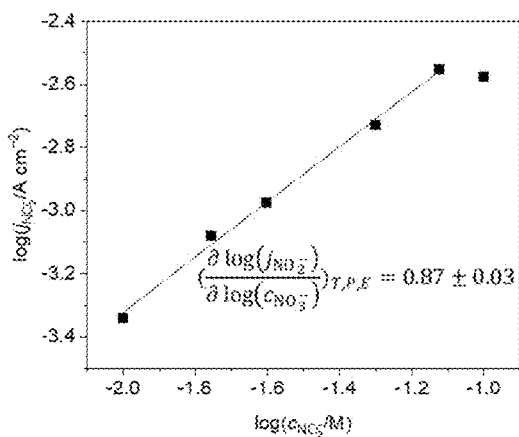


FIG. 49A

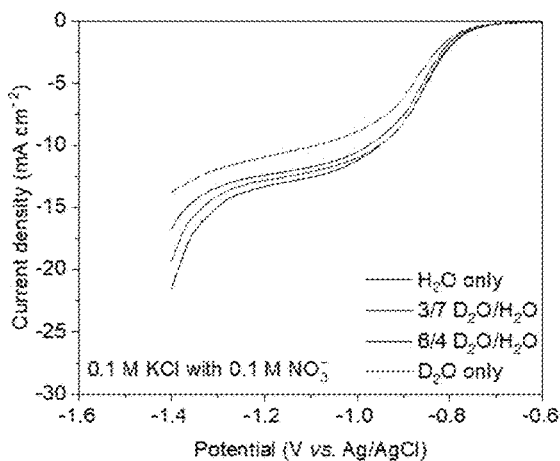


FIG. 49B

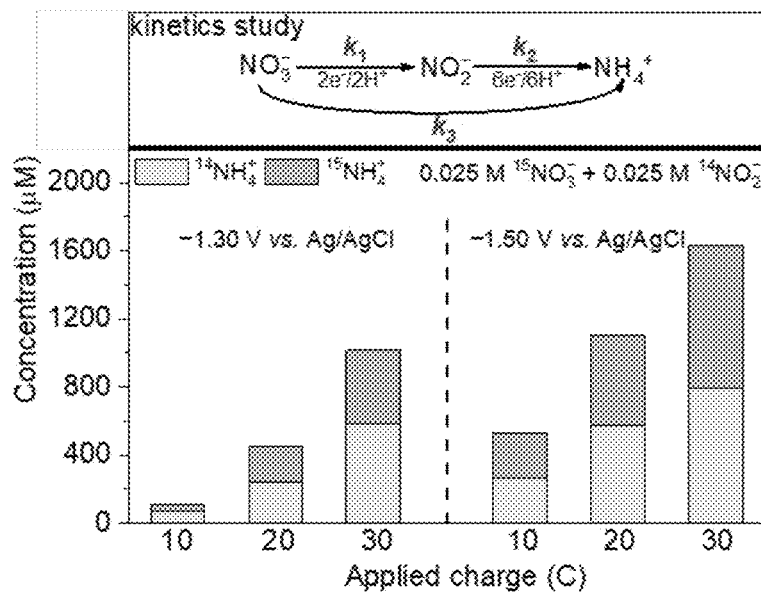


FIG. 49C

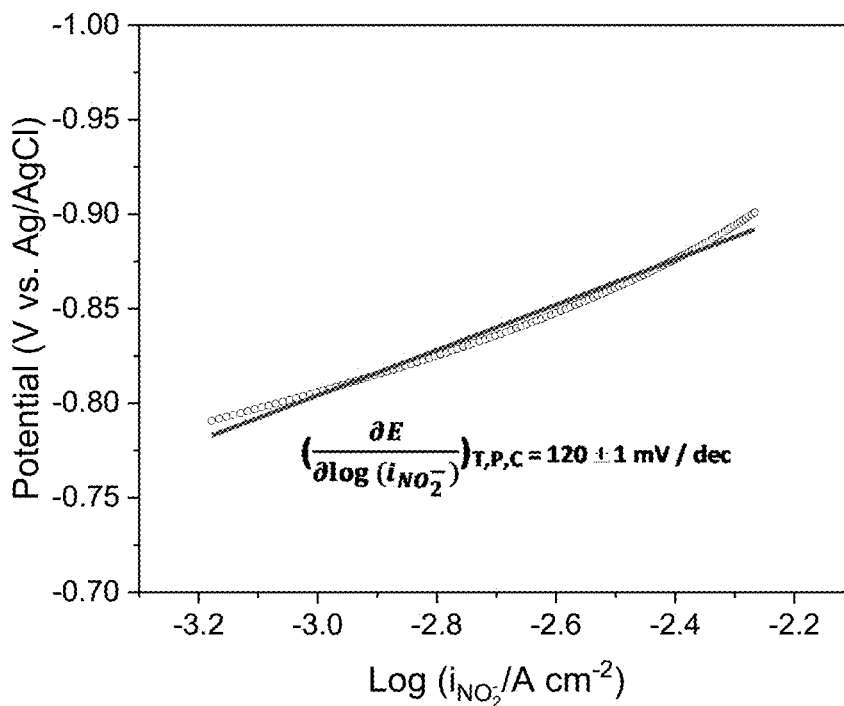


FIG. 50

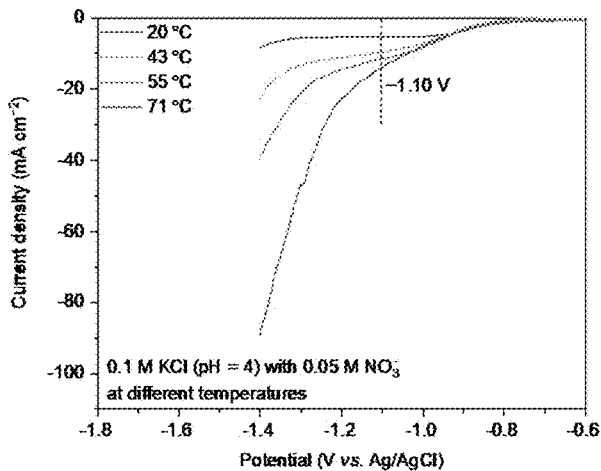


FIG. 51A

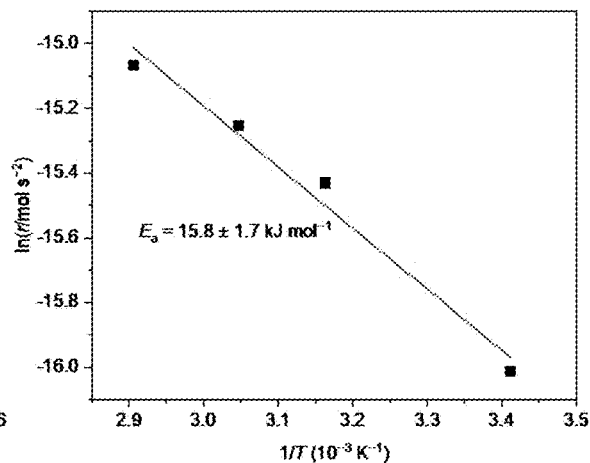


FIG. 51B

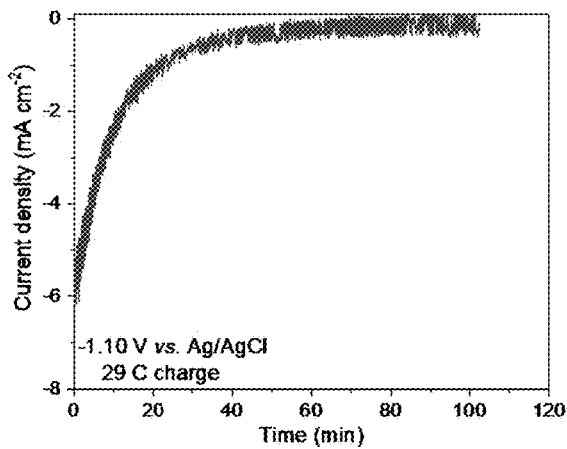


FIG. 52A

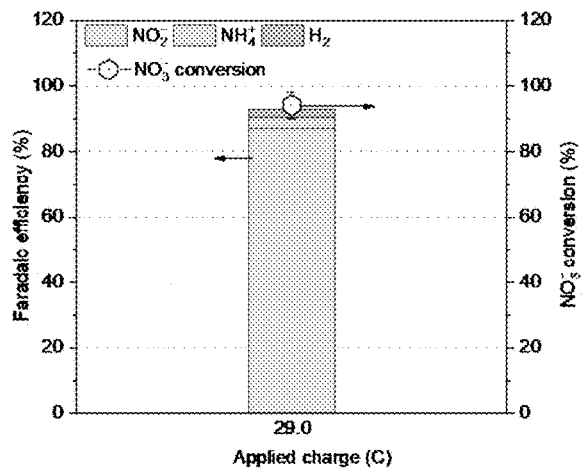


FIG. 52B

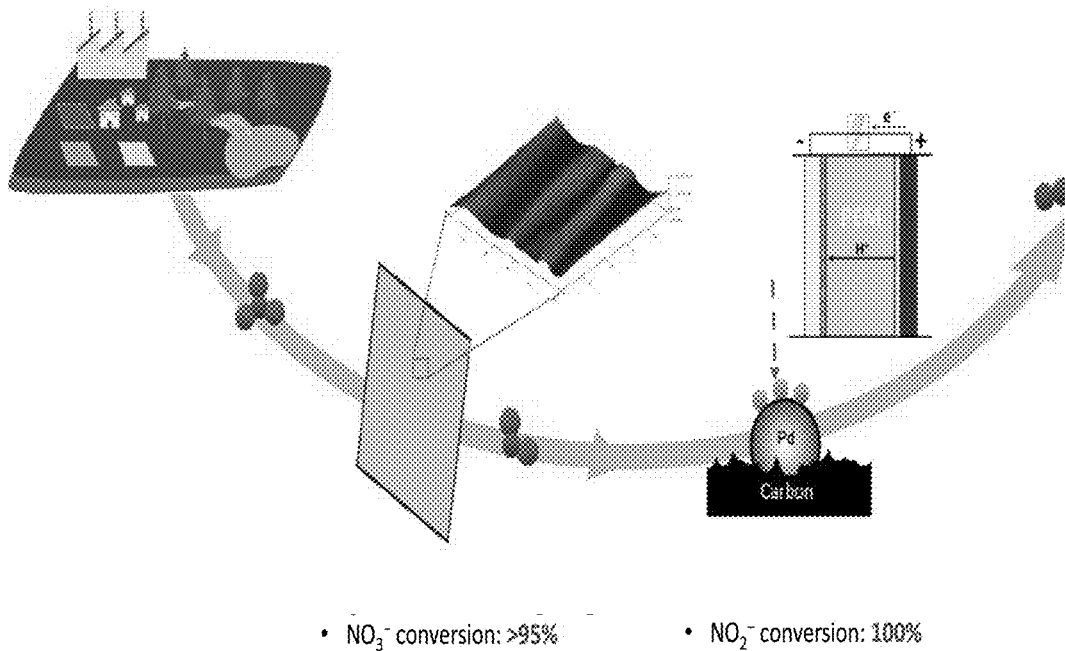


FIG. 53A

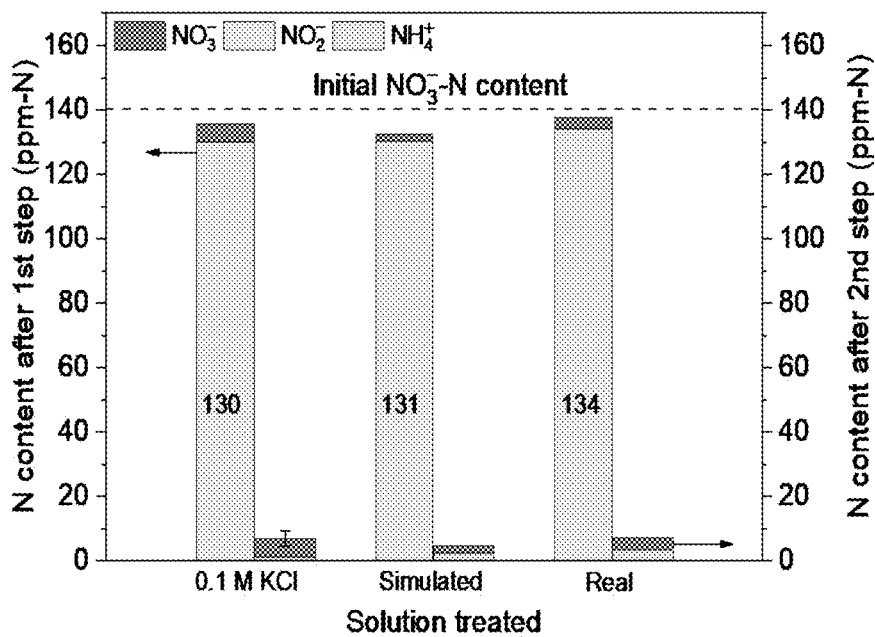


FIG. 53B

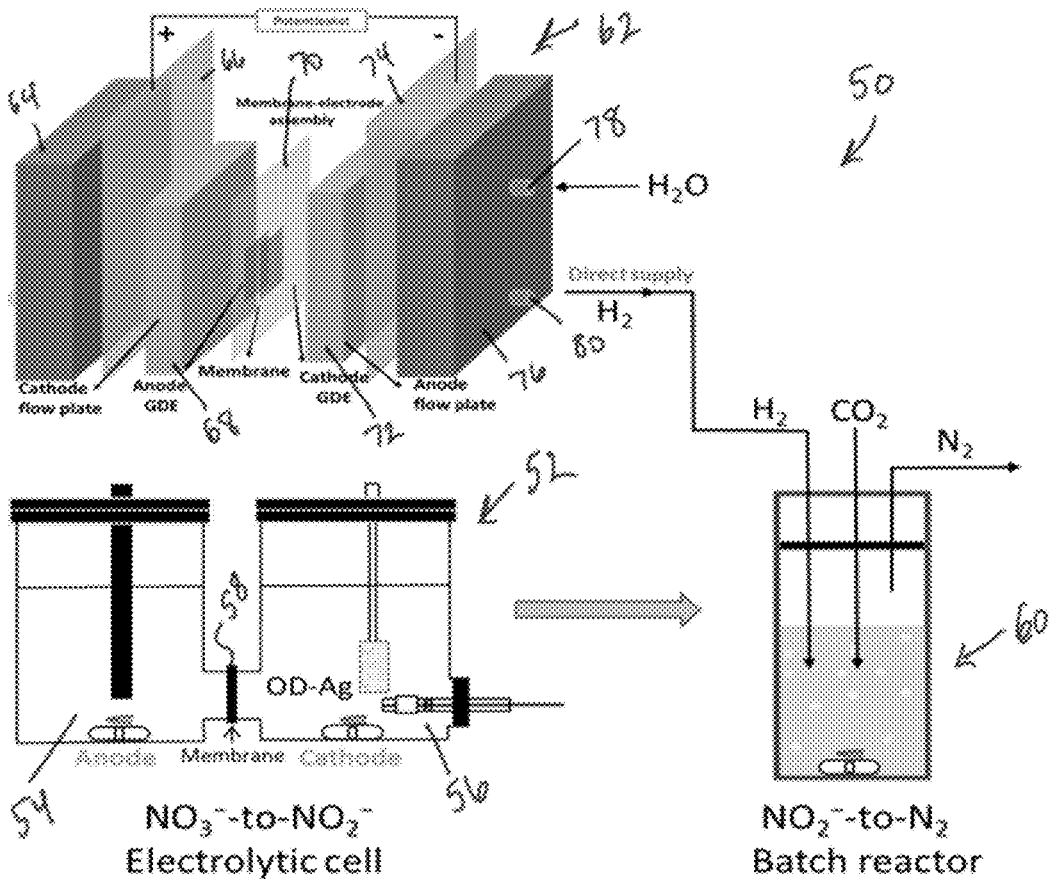


FIG. 54

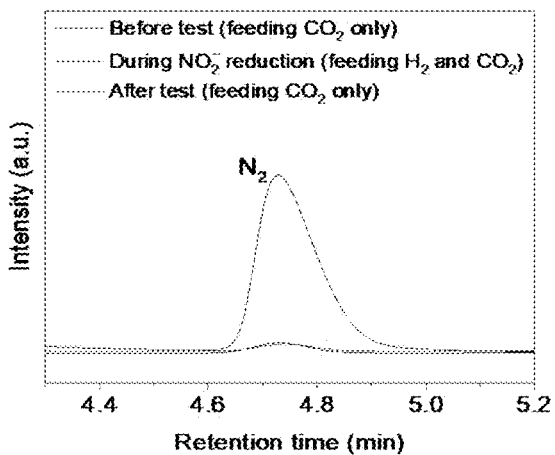


FIG. 55A

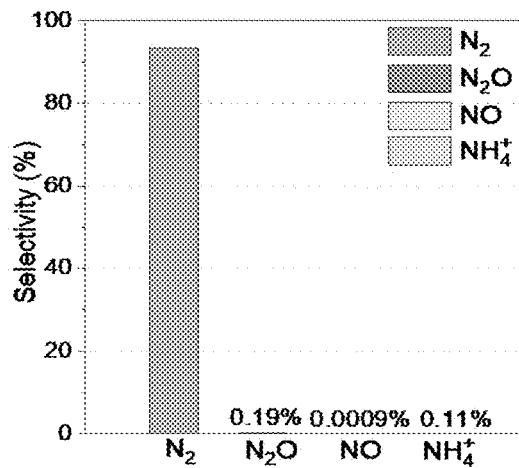


FIG. 55B

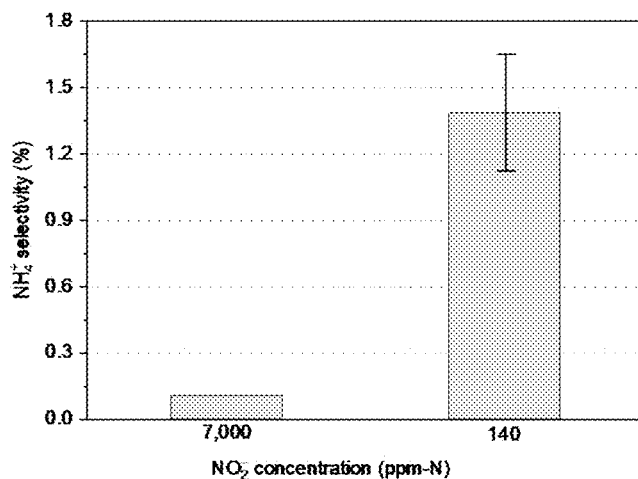


FIG. 56A

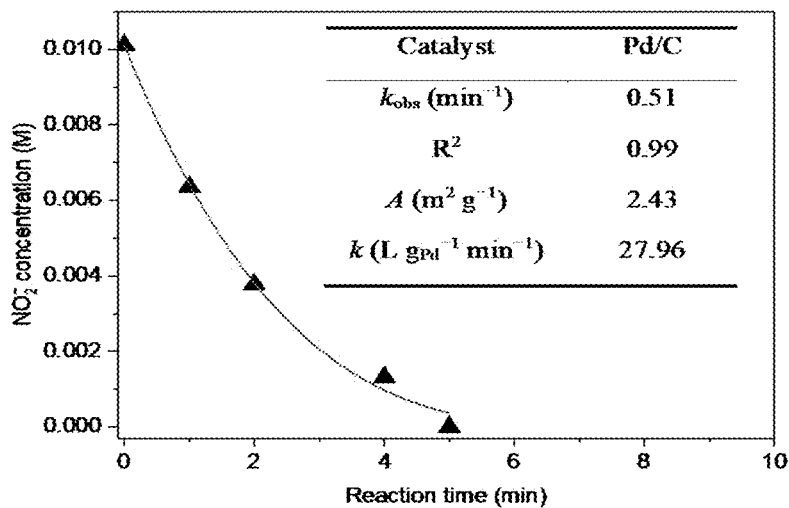


FIG. 56B

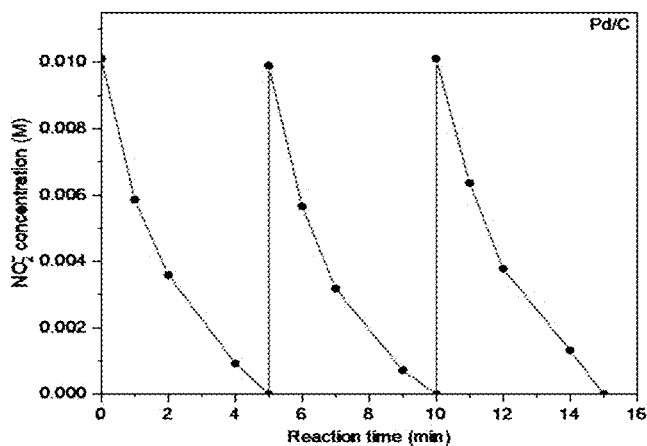


FIG. 56C

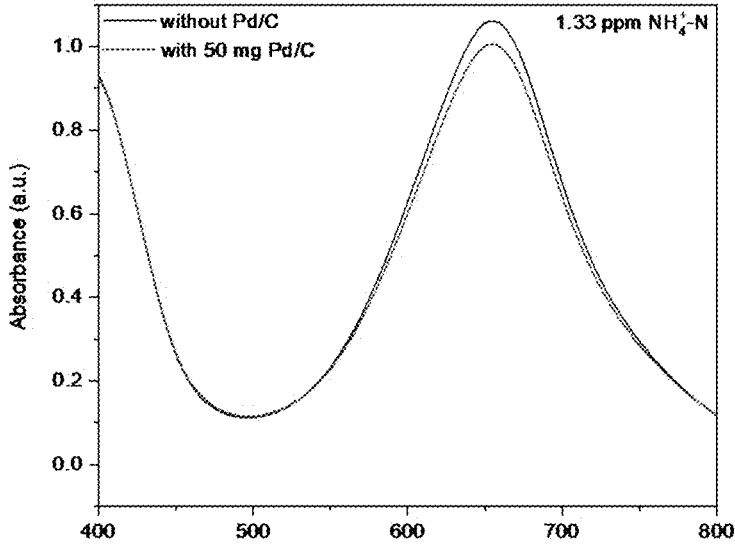


FIG. 57A

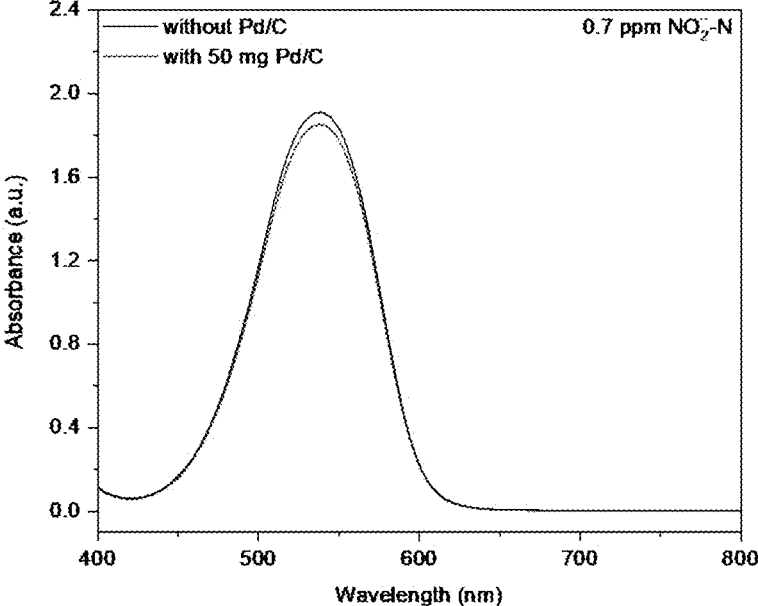


FIG. 57B

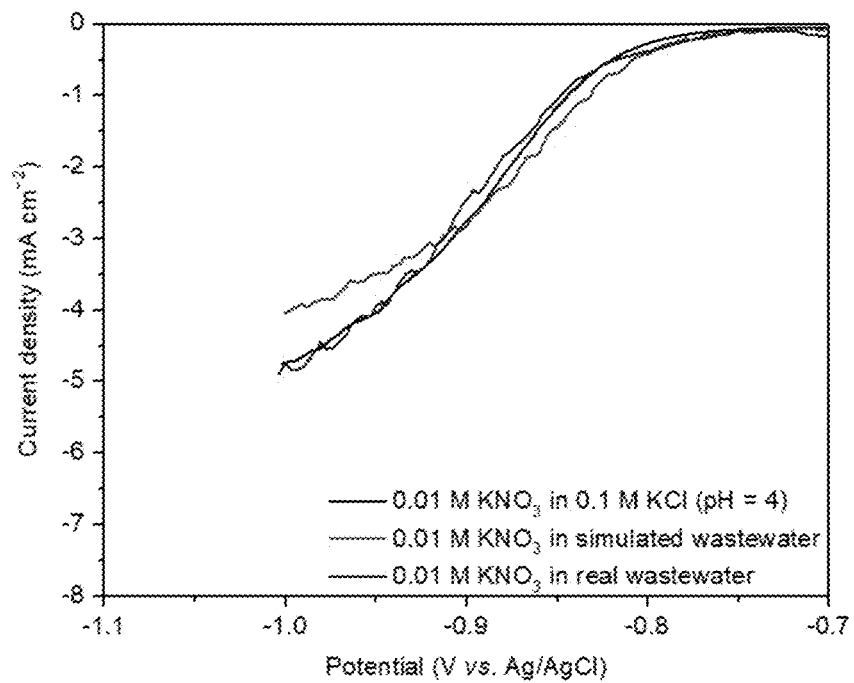


FIG. 58

SYSTEM AND METHOD FOR REMOVING NITRATE FROM WATER

[0001] This application claims priority benefit of U.S. Provisional Patent Application Ser. No. 62/986,402, filed Mar. 6, 2020, which is hereby incorporated by reference in its entirety.

[0002] This invention was made with government support under grant number CHE 2036944 awarded by the National Science Foundation. The government has certain rights in the invention.

FIELD

[0003] The present application relates to a system and method for removing nitrate from water.

BACKGROUND

[0004] The nitrogen cycle plays a crucial role in biological, energy, and industrial processes (Rosca et al., “Nitrogen Cycle Electrocatalysis,” *Chem. Rev.* 109:2209-2244 (2009); Duca & Koper, “Powering Denitrification: The Perspectives of Electrocatalytic Nitrate,” *Energy Environ. Sci.* 5:9726-9742 (2012); Canfield et al., *Science* 330:192-196 (2010)). As a toxic chemical, nitrate (NO_3^-) has been increasingly found in agricultural runoff and industrial wastes, creating an imbalance in the global nitrogen cycle. The excessive NO_3^- is directly responsible for the notorious eutrophication in natural waters as well as other environmental problems (N. R. Council, *Clean Coastal Waters: Understanding and Reducing the Effects of Nutrient Pollution*, The National Academies Press, Washington, D.C., (2000)). The intake of NO_3^- has been linked to severe health issues such as methemoglobinemia (blue baby syndrome) (Ward et al., “Workgroup Report: Drinking-Water Nitrate and Health—Recent Findings and Research Needs,” *Environ. Health Perspect.* 113:1607-1614 (2005)), specific cancers, and birth defects (Ward et al., “Drinking Water Nitrate and Human Health: An Updated Review,” *Int. J. Environ. Res. Public Health* 15(7):1557 (2018)). Converting excess NO_3^- from waste streams to harmless dinitrogen (N_2) has therefore increasingly become an important research topic. In the process of the NO_3^- -to- N_2 reaction, nitrite (NO_2^-) has been recognized as an essential intermediate product that holds the key to understanding and controlling the product selectivity and reaction activity (De Vooy et al., “Electrocatalytic Reduction of NO_3^- on Palladium/Copper Electrodes,” *J. Mol. Catal. A Chem.* 154:203-215 (2000); Hörold et al., “Development of Catalysts for a Selective Nitrate and Nitrite Removal from Drinking Water,” *Catal. Today* 17:21-30 (1993)).

[0005] It is essential to strictly control the concentrations of nitrate and nitrite in drinking water below their maximum allowed contaminant levels of 10 ppm N (10 mg N per L) for nitrate, 1 ppm N for nitrite, and 0.66 ppm N for ammonia (EU, Council Directive 98/83/EC, Official Journal of the European Communities, Brussel, 1998; U.S. EPA, National Primary Drinking Water Regulations and Contaminant Candidate List, ed. U.S. EPA, 2008). Currently, the widely used technologies to remove nitrate or nitrite in drinking water include biological denitrification (Park & Yoo, “Biological Nitrate Removal in Industrial Wastewater Treatment: Which Electron Donor We Can Choose,” *Appl. Microbiol. Biotechnol.* 82:415-429 (2009); Ghafari et al., “Bio-electrochemical Removal of Nitrate from Water and Wastewater—A

Review,” *Bioresour. Technol.* 99:3965-3974 (2008)), reverse osmosis (Viraraghavan, “Nitrate Removal from Drinking Water,” *J. Environ. Eng.* 123(4):371-380 (1997)), ion exchange (Samatya et al., “Removal of Nitrate from Aqueous Solution by Nitrate Selective Ion Exchange Resins,” *Reactive and Functional Polymers* 66:1206-1214 (2006)), and catalytic/electrocatalytic denitrification (Hamid et al., “Highly Reactive and Selective Sn—Pd Bimetallic Catalyst Supported by Nanocrystalline ZSM-5 for Aqueous Nitrate Reduction,” *Applied Catalysis B: Environmental* 187:37-46 (2016); Reyter et al., “Study of the Electroreduction of Nitrate on Copper in Alkaline Solution,” *Electrochimica Acta* 53:5977-5984 (2008); Siriwatcharapiboon et al., “Promotion Effects of Sn on the Electrocatalytic Reduction of Nitrate at Rh Nanoparticles,” *ChemElectroChem* 1:172-179 (2014)). The main drawback of biological denitrification is that the growth of bacteria in water can cause severe issues without appropriate purification. The reverse osmosis and ion exchange processes can generate secondary nitrate/nitrite containing waste that in turn must be further treated before disposal.

[0006] Realizing highly-selective nitrate reduction towards NO_2^- has, however, proven challenging, largely because the reactivity is significantly higher for NO_2^- than NO_3^- , leading to the deep reduction to ammonia/ammonium $\text{NH}_3/\text{NH}_4^+$ with the lowest valence (Laue et al., *Ullmann's Encyclopedia of Industrial Chemistry* (2000); Matson et al., “Facile Nitrite Reduction in a Non-heme Iron System: Formation of an Iron(III)-Oxo,” *J. Am. Chem. Soc.* 136:17398-17401 (2014)). Compared with NO_2^- , NO_3^- possesses a trigonal planar structure with a stable symmetrical (D_{3h}) resonance that gives rise to lower binding affinity to metals and weakens the adsorption necessary for catalytic reactions (Ford et al., “A Bioinspired Iron Catalyst for Nitrate and Perchlorate Reduction,” *Science* 354:741-743 (2016); Suslick & Watson, “Photochemical Reduction of Nitrate and Nitrite by Manganese and Iron Porphyrins,” *Inorg. Chem.* 30:912-919 (1991)). Meanwhile, the complex reduction networks involving several nitrogen-containing chemicals provides further challenges toward controlling reduction processes (Rosca et al., “Nitrogen Cycle Electrocatalysis,” *Chem. Rev.* 109:2209-2244 (2009)). Therefore, specific catalytic systems are usually required to conduct selective NO_3^- reduction reactions (NO_3RR) (Ford et al., “A Bioinspired Iron Catalyst for Nitrate and Perchlorate Reduction,” *Science* 354:741-743 (2016); Yoshioka et al., “Electrocatalytic Reduction of Nitrate to Nitrous Oxide by a Copper-Modified Covalent Triazine Framework,” *J. Phys. Chem.* 120:5729-15734 (2016)).

[0007] In addition to being the intermediate product towards harmless N_2 , NO_2^- is also a versatile chemical widely involved in chemical, pharmaceutical (e.g., dyes, caffeine, and pytamine) (Laue et al., *Ullmann's Encyclopedia of Industrial Chemistry* (2000); Bauer et al., “Recent Progress in Alkali Nitrate/Nitrite Developments for Solar Thermal Power Applications,” *Molten Salts Chemistry and Technology, Norway*, 5-9 Jun. 2011), and food industries (as preservative and flavor agent) (Carocho et al., “Natural Food Additives: Quo Vadis?,” *Trends Food Sci. Technol.* 45:284-295 (2015); Cammack et al., “Nitrite and Nitrosyl Compounds in Food Preservation,” *Biochim. Biophys. Acta* 1411:475-488 (1999)). Further, the use of NO_2^- as a reactive platform has shown promising design flexibilities for the distributed production of nitrogen-based valuable chemicals

such as NH_4^+ (Clark et al., “Mechanistic Insights into pH-Controlled Nitrite Reduction to Ammonia and Hydrazine over Rhodium,” *ACS Catal.* 10:494-509 (2019); Li et al., “ $\text{Cu}_x\text{Ir}_{1-x}$ Nanoalloy Catalysts Achieve Near 100% Selectivity for Aqueous Nitrite Reduction to NH_3 ,” *ACS Catal.* 10:7915-7921 (2020); Li et al., “Molybdenum Sulfide: A Bioinspired Electrocatalyst for Dissimilatory Ammonia Synthesis with Geoelectrical Current,” *J. Phys. Chem. C* 121:2154-2164 (2017)), NO (Park et al., “In Situ Electrochemical Generation of Nitric Oxide for Neuronal Modulation,” *Nat. Nanotechnol.* 15:690-697 (2020)), and urea (Feng et al., “Te-Doped Pd Nanocrystal for Electrochemical Urea Production by Efficiently Coupling Carbon Dioxide Reduction with Nitrite Reduction,” *Nano Lett.* 20:8282-8289 (2020)).






[0008] Early studies of selective reduction of NO_3^- to NO_2^- were mainly through biological catalysis with nitrate reductase during anaerobic respiration (Zheng et al., “Crystal Structure of a Nitrate/Nitrite Exchanger,” *Nature* 497:647-651 (2013); Ghafari et al., “Bio-Electrochemical Removal of Nitrate from Water and Wastewater—A Review,” *Bioresour. Technol.* 99:3965-3974 (2008)), and the catalytic activity is highly sensitive to the living and functioning environment (Magalon et al., “Molybdenum Cofactor Properties and [Fe—S] Cluster Coordination in *Escherichia coli* Nitrate Reductase A: Investigation by Site-Directed Mutagenesis of the Conserved His-50 Residue in the NarG Subunit,” *Biochemistry* 37:7363-7370 (1998)). Alternatively, heterogeneous/electrochemical catalysis plays an important role in the nitrogen cycle chemistry (Rosca et al., “Nitrogen Cycle Electrocatalysis,” *Chem. Rev.* 109:2209-2244 (2009)). Inspired by structures of nitrate reductase in the biological systems, some bio-mimicked catalysts based on deoxygenation-facilitating metal centers (e.g., Mo, Fe, and Co) were developed to catalyze NO_3RR in ambient conditions (Ford et al., “A Bioinspired Iron Catalyst for Nitrate and Perchlorate Reduction,” *Science* 354:741-743 (2016); Fourmond et al., “Reassessing the Strategies for Trapping Catalytic Intermediates During Nitrate Reductase Turnover,” *J. Phys. Chem. B* 114:3341-3347 (2010)). However, the highly selective generation of intermediate NO_2^- with an enhanced activity remained difficult to be realized. Thus, most previously reported NO_3^- -to- NO_2^- selectivity was <50% in the electrolysis system (Fajardo et al., “Earth-Abundant Elements a Sustainable Solution for Electrocatalytic Reduction of Nitrate,” *Appl. Catal. B* 281:119465 (2021)).

[0009] Recently, catalytic and electrocatalytic reduction of nitrate and nitrite to N_2 gas have received enormous research attention, owing to their unique advantages of low footprints (no residue left), and high activity and selectivity. The driving force for nitrate or nitrite reduction is heat or potentially renewable electricity (harvested from wind and solar).

[0010] Catalytic reduction of nitrate in a batch reactor was first reported by Hörold et al., “Catalytical Removal of Nitrate and Nitrite from Drinking Water: 1. Screening for Hydrogenation Catalysts and Influence of Reaction Conditions on Activity and Selectivity,” *Environmental Technology* 14:931-939 (1993) and Horold et al., “Development of Catalysts for a Selective Nitrate and Nitrite Removal from Drinking Water,” *Catalysis Today* 17:21-30 (1993). Pd was found to be the most efficient catalyst to reduce nitrite, while Pd—Cu was the best to promote nitrate reduction. The

catalytic reduction processes generally include two steps. The first is nitrate reduction to nitrite on a metal promotor (e.g., Cu, Sn, In) (Prüsse et al., “Improving the Catalytic Nitrate Reduction,” *Catalysis Today* 55:79-90 (2000); Marchesini et al., “Nitrate Hydrogenation over Pt, In/ Al_2O_3 and Pt, In/ SiO_2 . Effect of Aqueous Media and Catalyst Surface Properties Upon the Catalytic Activity,” *Catalysis Communications* 9:1021-1026 (2008); Brian et al., “Effects of Natural Water Ions and Humic Acid on Catalytic Nitrate Reduction Kinetics Using an Alumina Supported Pd—Cu Catalyst,” *Environ. Sci. Technol.* 40:3075-3081 (2006)), and the second step is reduction of nitrite and subsequent intermediates to N_2 over Pd based catalysts (Shuai et al., “Enhanced Activity and Selectivity of Carbon Nanofiber Supported Pd Catalysts for Nitrite Reduction,” *Environ. Sci. Technol.* 46:2847-2855 (2012); Guo et al., “Insights into Nitrate Reduction over Indium-Decorated Palladium Nanoparticle Catalysts,” *ACS Catalysis* 8:503-515 (2017); Seraj et al., “PdAu Alloy Nanoparticle Catalysts: Effective Candidates for Nitrite Reduction in Water,” *ACS Catalysis* 7:3268-3276 (2017); Qian et al., “Supporting Palladium Metal on Gold Nanoparticles Improves its Catalysis for Nitrite Reduction,” *Nanoscale* 6:358-364 (2014)). Many materials have been investigated as catalyst supports to promote nitrate and nitrite reduction, e.g., carbon (Yoshinaga et al., “Hydrogenation of Nitrate in Water to Nitrogen over Pd—Cu Supported on Active Carbon,” *Journal of Catalysis* 207:37-45 (2002)), alumina (Costas et al., “The Remarkable Effect of Oxygen on the N_2 Selectivity of Water Catalytic Denitrification by Hydrogen,” *Environ. Sci. Technol.* 41:950-956 (2007)), silica (Garron et al., “Effect of the Support on Tin Distribution in Pd—Sn/ Al_2O_3 and Pd—Sn/ SiO_2 Catalysts for Application in Water Denitration,” *Applied Catalysis B: Environmental* 59:57-69 (2005)), and iron oxide (Jung et al., “Development of Pd—Cu/hematite Catalyst for Selective Nitrate Reduction,” *Environ. Sci. Technol.* 48:9651-9658 (2014)). Although nitrate and nitrite can be eliminated, the low nitrate removal rate and considerable amount of unwanted ammonia as by-product were the main drawback, even on the bimetallic system, e.g., Pd—Cu nanoparticles.

[0011] Electrocatalysis can provide an alternative way for nitrate reduction by using renewable electricity. From the thermodynamic point of view, N_2 is the most favorable nitrate product, as shown below (Rosca et al., “Nitrogen Cycle Electrocatalysis,” *Chem. Rev.* 109:2209-2244 (2009)).



(Reaction equations and thermodynamic potentials for nitrate reduction to different products: The reversible thermodynamic potentials under standard reactions (20°C , 1 atm) are shown as following (vs. normal hydrogen electrode, NHE) (Rosca et al., “Nitrogen Cycle Electrocatalysis,” *Chemical Reviews* 109:2209-2244 (2009)).

[0012] However, from the kinetics point of view, nitrate reduction to N_2 needs high overpotential and usually NH_3 is

a preferable product. A general reaction pathway was proposed by de Voors et al., "Electrocatalytic Reduction of NO_3^- on Palladium/Copper Electrodes," *Journal of Molecular Catalysis A: Chemical* 154:203-215 (2000). The first step is adsorption of NO_3^- on the electrode surface, which is a fast and reversible process; the second step is NO_3^- reduction to NO_2^- and it is known to be the rate-determining step (rds); the subsequent steps are selective NO_2^- reduction to possible N-based products including NO , N_2O , N_2 , NH_2OH , and NH_3 . The selectivity heavily depends on the reaction conditions and metal catalysts properties. Many catalysts have been studied for NO_3^- electrocatalytic reduction, such as Sn (Katsounaros et al., "Efficient Electrochemical Reduction of Nitrate to Nitrogen on Tin Cathode at Very High Cathodic Potentials," *Electrochimica Acta* 52:1329-1338 (2006)), Cu (Reyter et al., "Study of the Electroreduction of Nitrate on Copper in Alkaline Solution," *Electrochimica Acta* 53:5977-5984 (2008); Yoshioka et al., "Electrocatalytic Reduction of Nitrate to Nitrous Oxide by a Copper-Modified Covalent Triazine Framework," *J. Phys. Chem. C* 120: 15729-15734 (2016)), Pt (Duca et al., "Direct Reduction of Nitrite to N_2 on a Pt(100) Electrode in Alkaline Media," *J. Am. Chem. Soc.* 132:18042-18044 (2010)), and Pd-Cu (Ghodbane et al., "Electrochemical Reduction of Nitrate on Pyrolytic graphite supported Cu and PdCu Catalysts," *J. Elect. Soc.* 155:F117-F123 (2008)). In addition, Shen et al., "Electrocatalytic Nitrate Reduction by a Cobalt Protoporphyrin Immobilized on a Pyrolytic Graphite Electrode," *Langmuir* 31:8495-8501 (2015) reported high-value-added chemical NH_2OH could be obtained on a cobalt protoporphyrin catalyst, and the selectivity highly depends on the pH. However, controlled high selectivity to nitrogen from direct electrocatalytic reduction of nitrate has not been achieved yet. Instead, significant amount of NH_3 production remain a practical challenge that is needed to be addressed.

[0013] The present application is directed to overcoming limitations in the art.

SUMMARY

[0014] One aspect of the present application relates to a system for removal of nitrate from water. The system includes a first reactor comprising a porous oxide-derived silver electrode (OD-Ag) for electrocatalytic reduction of nitrate (NO_3^-) to nitrite (NO_2^-) and a second reactor comprising a Pd-based catalyst for catalytic reduction of nitrite (NO_2^-).

[0015] Another aspect of the present application relates to a method of removing nitrate from water. This method involves providing a system comprising a first reactor comprising a porous oxide-derived silver electrode (OD-Ag) for electrocatalytic reduction of nitrate (NO_3^-) to nitrite (NO_2^-) and a second reactor comprising a Pd-based catalyst for catalytic reduction of nitrite (NO_2^-). The method further involves introducing water containing nitrate (NO_3^-) into the first reactor to cause catalytic reduction of the nitrate into nitrite (NO_2^-) by the porous oxide-derived silver electrode (OD-Ag) and introducing water from the first reactor is introduced into the second reactor to cause reduction of nitrite (NO_2^-) by the Pd-based catalyst, thereby removing nitrate from the drinking water.

[0016] The present application describes a process combining electrocatalysis and catalysis for efficient conversion of nitrite to N_2 . In particular, electrocatalytic reduction of nitrate (NO_3^-) over an oxide-derived porous Ag (OD-Ag) to

nitrite (NO_2^-) with high selectivity with negligible NH_3 as a side product is described. The NO_2^- selectivity ($\geq 95\%$) at nearly 100% nitrate conversion was higher than Ag foil and Ag/C nanoparticles. Catalytic reduction of nitrite over Pd-based catalysts (5% Pd/C, 5% Pd/SiO₂, and 5% Pd/Al₂O₃) is also disclosed, which achieved N_2 selectivity of $>99\%$ and NH_3 selectivity of $<1\%$ at 100% conversion of nitrite. It is demonstrated that combining electrocatalytic nitrate reduction and catalytic nitrite reduction in one system can be used to treat waste water containing 0.01 M nitrate (140 ppm-N). The concentration of nitrate, nitrite, and ammonium in the final solution was 4.7 ppm, 0 ppm, and 0.8 ppm, respectively, which is lower than any previously reported results.

[0017] The oxide-derived Ag (OD-Ag) electrocatalyst was discovered to have unique selectivity and superior activity for electrocatalytic NO_3^- -to- NO_2^- reaction. Up to 98% selectivity and 95% faradaic efficiency were achieved and well-maintained in a wide potential window. The wave-like morphology exposing the increased abundance of under-coordinated Ag sites could facilitate enhancing its intrinsic activity. Further, electro-kinetics and DFT computations provided mechanistic insights into the underlying cause of the unique NO_3^- -to- NO_2^- selectivity observed on OD-Ag. Based on the exceptionally high NO_3^- -to- NO_2^- selectivity on OD-Ag, a combined electrocatalytic-catalytic process was demonstrated to treat real-world NO_3^- -containing wastewater to harmless N_2 without considerable NH_4^+ . The directional conversion of NO_3^- to NO_2^- discovered opens new scenarios for N-cycle management and enables many energy-efficient and/or cost-effective distributed synthetic routes.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIGS. 1A-B are SEM images of OD-Ag at different magnifications.

[0019] FIG. 2 is a graph showing XRD patterns of polycrystalline Ag/C, Ag foil, and OD-Ag before and after electrocatalysis tests.

[0020] FIGS. 3A-D are graphs showing cyclic voltammograms of polycrystalline Cu (FIG. 3A), polycrystalline Ag (FIG. 3B), 0.5 mg/cm² Ag/C (FIG. 3C), and OD-Ag (FIG. 3D) in 0.1M KCl (pH=4), 0.1M KCl+0.1M KNO₃ (pH=4), and 0.1M KCl+0.1M KNO₂ (pH=4), respectively. Conditions: Scan rate 20 mV/s, geometric electrode area immersed in electrolyte were all 4 cm², without stirring.

[0021] FIGS. 4A-D are graphs showing NO_3^- conversion and product selectivity on Ag foil (FIG. 4A) and Cu foil (FIG. 4B) in different voltages. Their corresponding faradic efficiency to different products and total charge passed is shown in FIGS. 4C-D. Conditions: 1 h duration, cathode electrolyte 0.1M KCl+0.1M KNO₃ (pH=4), anode electrolyte 0.1M KCl (pH=4), stir rate 350 rpm, geometric electrode area immersed in electrolyte were all 4 cm².

[0022] FIGS. 5A-D are graphs showing NO_3^- conversion and product selectivity on 0.5 mg/cm² Ag/C (FIG. 5A) and OD-Ag (FIG. 5B) in different voltages. Their corresponding faradic efficiency to different products and total charge passed are shown in FIGS. 5C-D. Conditions: 1 h duration, cathode electrolyte 0.1M KCl+0.1M KNO₃ (pH=4), anode electrolyte 0.1M KCl (pH=4), stir rate 350 rpm, geometric electrode area immersed in electrolyte were all 4 cm².

[0023] FIGS. 6A-B are graphs showing NO_3^- conversion and product selectivity (FIG. 6A) and faradic efficiency (FIG. 6B) on OD-Ag with different pH. Conditions: Con-

stant current 1 h (total charge equal 90° C.), cathode electrolyte 0.1M KCl+0.1M KNO₃ (different pH), anode electrolyte 0.1M KCl (different pH), stir rate 350 rpm, geometric electrode area immersed in electrolyte were all 4 cm². pH=5.8 means 0.1M KCl+0.1M KNO₃ without adjusting pH, otherwise, pH was adjusted by concentrated HCl or KOH.

[0024] FIGS. 7A-B are graphs showing NO₂⁻ conversion and product selectivity (FIG. 7A) and faradic efficiency and total charge passed on OD-Ag (FIG. 7B).

[0025] Conditions: 1 h duration, cathode electrolyte 0.1M KCl+0.1M KNO₂ (pH=4), anode electrolyte 0.1M KCl (pH=4), stir rate 350 rpm, geometric electrode area immersed in electrolyte were 4 cm².

[0026] FIG. 8 is a graph showing NO₃⁻ conversion and product selectivity on OD-Ag. Conditions: 0.1M KCl+0.01M KNO₃ (pH=4), -1.1V vs Ag/AgCl, different charge passed (29° C., 31.5° C., and 32.2° C.), respectively, stir rate 350 rpm, geometric electrode area immersed in electrolyte were 6 cm².

[0027] FIGS. 9A-B are graphs showing NO₂⁻ catalytic reduction at Pd-based catalysts (5% Pd/SiO₂, 5% Pd/Al₂O₃, and 5% Pd/C). Their corresponding NH₃ selectivity and reaction rate constant (FIG. 9A) and final NH₄⁺ concentration (FIG. 9B) as shown. Conditions: 0.1 M KOH+0.1 M KCl+0.01 M KNO₂ as feedstock, purge CO₂ for 15 mins before reduction, 50 mg Catalyst, 15 ml reaction solution in H-Cell, H₂ flow rate: 25 ml/min, CO₂ flow rate: 50 ml/min, room temperature and ambient pressure, 800 rpm stir rate.

[0028] FIGS. 10A-C are graphs showing NO₂⁻ reduction in three continuous stability tests on 5% Pd/Al₂O₃(FIG. 10A), 5% Pd/C (FIG. 10B), and 5% Pd/SiO₂ (FIG. 10C), respectively.

[0029] FIG. 11 is a schematic illustration showing one embodiment of an H-cell test configuration for NO₃⁻ electroreduction connected with on-line GC and off-line HPLC and UV-Vis.

[0030] FIGS. 12A-B are photographs showing an H-cell image for NO₃⁻ electrocatalytic reduction connected with on-line GC (FIG. 12A) and an H-cell image for NO₂⁻ catalytic reduction (FIG. 12B).

[0031] FIGS. 13A-B are graphs showing HPLC results for NO₃⁻ calibration (FIG. 13A) and NO₂⁻ calibration (FIG. 13B).

[0032] FIG. 14 is a graph showing a H₂ calibration curve by using different concentrations of H₂ calibration gases (10 ppm, 100 ppm, 1,000 ppm, 5,000 ppm, and 10,000 ppm).

[0033] FIG. 15 is a graph showing a NO₂⁻ calibration curve by UV-Vis.

[0034] FIG. 16 is a graph showing different NH₃ calibration curves used in all processes. The line with squares represents different concentrations of NH₃ in pH=3, 0.1M KCl. The line with triangles represents different concentrations of NH₃ prepared and diluted by CO₂, saturated 0.1 M KOH, and 0.1 M KCl solution, then using 12 M KOH to adjust NH₃ standard solutions to pH=13. The line with circles represents different concentrations of NH₃ in 0.1 M KOH and adjusted pH to accurate 13 by pH meter.

[0035] FIG. 17 is a graph showing an NH₂OH calibration curve.

[0036] FIG. 18 is a graph showing cyclic voltammetry of Ag foil from -0.4V to 1.2V vs (Ag/AgCl) with a scan rate of 20 mV/s in a one-compartment cell.

[0037] FIGS. 19A-C are photographic images of Ag foil (FIG. 19A), Ag oxide (FIG. 19B), and OD-Ag (FIG. 19C). The total geometric area for square-wave pulse voltage treatment is 4 cm² in total (one side 2 cm²).

[0038] FIGS. 20A-B are SEM images at different magnifications of OD-Ag after nitrate electrocatalytic reduction.

[0039] FIG. 21 is a graph showing that cyclic voltammetry was performed from -0.1 V to -0.48 V (vs. Ag/AgCl) with a scan rate of 10 mV/s.

[0040] FIG. 22 is a graph showing cyclic voltammograms on carbon cloth in 0.1 M KCl (pH=4), 0.1 M KCl+0.1 M KNO₃ (pH=4), and 0.1 M KCl+0.1 M KNO₂ (pH=4), respectively. Conditions: Scan rate of 20 mV/s, geometric electrode area immersed in electrolyte were all 4 cm², without stirring.

[0041] FIGS. 23A-E are graphs showing cyclic voltammograms of NH₂OH electroreduction (FIG. 23A). Conditions: Scan rate of 20 mV/s, OD-Ag electrode, 0.1 M KCl+0.1 M NH₂OH (pH=4), geometric electrode area immersed in electrolyte was 4 cm², without stirring. NH₃ selectivity (FIG. 23B) and faradic efficiency for NH₂OH electroreduction (FIG. 23C). Conditions: 1 h duration, cathode electrolyte 0.1 M KCl+0.1M NH₂OH (pH=4), anode electrolyte 0.1 M KCl (pH=4), stir rate 350 rpm, geometric electrode area immersed in electrolyte were all 4 cm². Catalytic reduction of NH₂OH in 0.1 M NH₂OH+0.1 M KCl at different pH (FIG. 23D) and catalytic reduction of NO₃⁻ in 0.1 M KNO₃+0.1 M KCl at different pH (FIG. 23E). (*) in FIG. 23E means no activity. Condition: H-type cell, H₂ flow rate 100 ml/min, 1 h duration.

[0042] FIG. 24 is a graph showing NO₂⁻ 100% removal time with respect to H₂ flow rate.

[0043] FIG. 25 is a graph showing that control experiments showed the products' selectivity and NO₃⁻ or NO₂⁻ conversion. X means no activity at this condition. Reaction conditions: 0.1 M KOH+0.1 M KCl+0.01 M KNO₂ or 0.01 M KNO₃ as feedstock, purge CO₂ 15 mins before reduction, 50 mg catalyst, 15 ml reaction solution in H-Cell, 25 ml/min H₂ flow rate, 50 ml/min CO₂ flow rate, room temperature and ambient pressure, 800 rpm stir rate. I: 5% Pd/Al₂O₃ 50 mg NO₃⁻ reduction without Hz; II: 5% Pd/Al₂O₃ 50 mg NO₂⁻ reduction without Hz; III: OD-Ag NO₃⁻ reduction with H₂+CO₂, 1 h; IV: OD-Ag NO₂⁻ reduction with H₂+CO₂, 1 h; V: 5% Pd/Al₂O₃ 50 mg NO₃⁻ reduction with H₂+CO₂, 2 h; VI: 5% Pd/C 50 mg NO₃⁻ reduction with H₂+CO₂, 2 h; VII: 5% Pd/SiO₂ 50 mg NO₃⁻ reduction with H₂+CO₂, 2 h; VIII: 5% Pd/Al₂O₃ 100 mg NO₂⁻ reduction with H₂, without CO₂, 0.5 h; IX: 20% Ag/C 50 mg NO₂⁻ reduction with H₂+CO₂, 0.5 h; X: Ag nanopowder 50 mg NO₂⁻ reduction with H₂+CO₂, 0.5 h.

[0044] FIG. 26 is a graph showing NO₂⁻ catalytic reduction on 5% Pd/C catalyst with different catalyst content. Their corresponding final NH₄⁺ concentration is shown. Conditions: 0.1 M KOH+0.1 M KCl+0.01 M KNO₂ as feedstock, purge CO₂ 15 mins before reduction, 50 mg catalyst, 15 ml reaction solution in H-Cell, H₂ flow rate: 25 ml/min, CO₂ flow rate: 50 ml/min, room temperature and ambient pressure, 800 rpm stir rate.

[0045] FIGS. 27A-D are graphs showing NH₃ adsorption control experiments at 0 h tests 2 ml 100 mg/L NH₃-N standard solution diluted to 150 ml by 0.0005 M H₂SO₄, 15 ml NH₃ standard solution with or without 50 mg catalyst (FIG. 27A). 2 ml 100 mg/L NH₃-N standard solution diluted to 150 ml by CO₂ buffer solution (0.1 M KOH+0.1M

KCl and saturate CO₂), 15 ml NH₃ standard solution with or without 50 mg catalyst (FIG. 27B). 2 ml 100 mg/L NH₃—N standard solution diluted to 150 ml by DI-water, 15 ml NH₃ standard solution with or without 50 mg catalyst (FIG. 27C). 2 ml 100 mg/L NH₃—N standard solution diluted to 150 ml by 0.1 M KOH, 15 ml NH₃ standard solution with or without 50 mg catalyst (FIG. 27D).

[0046] FIGS. 28A-C are graphs showing NH₃ adsorption control experiments at 20 h tests. In FIG. 28A, 2 ml 100 mg/L NH₃—N standard solution diluted to 150 ml by 0.0005 M H₂SO₄, 15 ml NH₃ standard solution with or without 50 mg catalyst and wait 20 h in air. In FIG. 28B, 2 ml 100 mg/L NH₃—N standard solution diluted to 150 ml by DI-water, 15 ml NH₃ standard solution with or without 50 mg catalyst and wait 20 h in air. In FIG. 28C, 2 ml 100 mg/L NH₃—N standard solution diluted to 150 ml by 0.1 M KOH, 15 ml NH₃ standard solution with or without 50 mg catalyst and wait 20 h in air.

[0047] FIG. 29 is a graph showing NO₂-adsorption control test results. 15 ml blank (standard NO₂ solution)+50 mg Pd/C, 50 mg Pd/Al₂O₃, 50 mg Pd/SiO₂, respectively. Stir 15 mins for UV-Vis test to get NO₂ concentration at 540 nm wavelength.

[0048] FIG. 30 is a graph showing NO₂ adsorption control test results. Blank: 0.01 M NO₂⁻ standard solution and dilute 200× for UV-Vis test 5% Pd/C: 0.01 M NO₂-standard solution 15 ml+50 mg 5% Pd/C and stir 5 mins, then filtered and diluted 200× for UV-Vis test.

[0049] FIGS. 31A-D display the NO₃⁻ reduction reactions performance on OD-Ag at pH 4. FIG. 31A is a photograph and SEM image of OD-Ag. FIG. 31B is an AFM image of OD-Ag. The inset graph is the height profile of a 7-μm section (the white line).

[0050] FIG. 31C is a plot of the linear sweep voltammetry of OD-Ag in three different solutions: 0.1 M KCl (leftmost curve), 0.1 M KCl with 0.1 M NO₃⁻ (rightmost curve), and 0.1 M KCl with 0.1 M NO₂⁻ (center curve). The onset potentials for NO₃RR, NO₂RR, and HER are marked, leading to the “E_{onset}(NO₃RR)–E_{onset}(NO₂RR)”=440 mV, and “E_{onset}(NO₃RR)–E_{onset}(HER)”=540 mV. The geometric area for OD-Ag was 4 cm².

[0051] FIG. 31D is a graph of product selectivity and conversion of NO₃⁻ in 0.1 M KCl with 0.05 M NO₃⁻ (left columns) and 0.01 M NO₃⁻ (right columns) at different applied potentials on OD-Ag with 29 C applied charge. The error bars represent the standard deviation for at least three independent measurements. FIG. 31E is graph of 0.01 M NO₃⁻ at -1.30 V_{Ag/AgCl} on different electrodes. The geometric area of the electrode was 6 cm² for -1.00 and -1.10 V_{Ag/AgCl} with 0.01 M NO₃⁻, and 2 cm² for all other conditions. The methods of product detection are detailed in Example 3 (infra), and their calibrations are shown in FIG. 34 and FIG. 35.

[0052] FIGS. 32A-G show the analysis of the electrolysis with 0.025 M ¹⁵NO₃⁻ and 0.025 M ¹⁴NO₂⁻ from Example 3 (infra). The electrolyte was 0.1 M KCl (pH=4) and the geometric area of OD-Ag was 2 cm². FIGS. 32A-C are plots of electrolysis at -1.50 V_{Ag/AgCl}. FIGS. 32D-F are plots of Electrolysis at -1.30 V_{Ag/AgCl}. FIG. 32G is a table summarizing the linear regression results. The detailed kinetic modeling and equations derivation were shown in Example 3 (infra).

[0053] FIGS. 33A-B show the catalytic reduction of NO₂ by water-splitting-derived H₂. FIG. 33A is plot of the

voltage profile of the PEM electrolyzer at 1.4 A, and the NO₂⁻ concentration before and after the reaction. At t=10-25 min, the gas outlet of the sealed cathode water tank was connected to the cell for NO₂⁻ reduction. FIG. 33B is a photograph of the experimental setup. The detailed PEM water electrolyzer set-up and catalytic reduction conditions are described Example 3 (infra). The H₂ feed was generated from a PEM water electrolyzer. NO₂⁻ was completely removed within 15 min with 0.9% selectivity to NH₄⁺, showing no significant difference with the performance with UHP H₂ feed (FIGS. 60A-C).

[0054] FIGS. 34A-B show the HPLC calibration with standard NO₃⁻ and NO₂⁻ solutions. FIG. 34A shows the HPLC chromatograms. The retention time was around 16 or 18 min for NO₂⁻ or NO₃⁻, respectively. FIG. 34B is a plot of the calibration curves.

[0055] FIGS. 35A-F show the UV-Vis calibrations of NO₂⁻, NH₂OH, and NH₄⁺. FIGS. 35A-B are UV-Vis spectra and the calibration curve of standard NO₂⁻ solutions. FIGS. 35C-D are the UV-Vis spectra and the calibration curve of the standard NH₂OH solutions. FIG. 35E shows the UV-Vis spectra of the standard NH₄⁺ solutions in CO₂-saturated 0.1 M KOH and 0.1 M KCl. The pH of the sample solutions was adjusted to 13 by adding KOH before the colorimetric test. FIG. 35F is the calibration curve plots for the standard NH₄⁺ solutions in different media.

[0056] FIGS. 36A-B show the ¹H NMR calibration with solutions containing ¹⁴NH₄⁺ and ¹⁵NH₄⁺ (in 0.1 M KCl with 0.1 M H₂SO₄). FIG. 36A is the ¹H NMR spectra collected with 2,048 scans. FIG. 36B is the calibration curve plots of ¹⁴NH₄⁺ and ¹⁵NH₄⁺.

[0057] FIGS. 37A-C show metal surfaces with distinctive electrocatalytic preference between NO₃⁻ reduction and NO₂ reduction. FIG. 37A is a graph of the onset-potential difference between NO₃⁻ reduction and NO₂⁻ reduction: “E_{onset}(NO₃RR)–E_{onset}(NO₂RR)”, and the onset-potential difference between NO₃⁻ reduction and HER: “E_{onset}(NO₃RR)–E_{onset}(HER)”. The detailed LSV curves to obtain onset potentials are shown in FIGS. 38A-38P. The error bars represent the standard deviation from at least three independent measurements. FIGS. 37B-C are LSV curves on Cu foil and Ag foil in three different solutions: 0.1 M KCl (leftmost curve), 0.1 M KCl with 0.1 M NO₃⁻ (rightmost curve), and 0.1 M KCl with 0.1 M NO₂⁻ (center curve). A scan rate of 5 mV s⁻¹ was the same for LSV on all metal surfaces, and all electrolytes were adjusted to pH 4. The geometric area of all metal foils was 4 cm².

[0058] FIGS. 38A-P are linear sweep voltammograms of metal foil electrodes. FIGS. 38A-P correspond to the voltammograms Ti, Pt, Zr, Fe, Ni, Pd, Au, V, Mo, Bi, Co, Zn, Sn, Al, W, and Pb, respectively, in three different solutions: 0.1 M KCl (black curves), 0.1 M KCl with 0.1 M NO₃⁻ (red curves), and 0.1 M KCl with 0.1 M NO₂⁻ (blue curves). The onset potentials (defined as the potential at -0.75 mA cm⁻²) of NO₃⁻ reduction, NO₂ reduction, and HER are labeled on the top of each graph. The geometric area of the electrodes was 4 cm². The range of x-axis in FIG. 38N (Al foil) is from -1.6 to -2.2 V_{Ag/AgCl}.

[0059] FIGS. 39A-C show the characterization of Ag foil during the preparation of OD-Ag. FIG. 39A shows photographs before and after. FIG. 39B shows the x-ray diffraction patterns. FIG. 39C shows the XPS Ag 3d spectra. The surface color of Ag foil was observed to periodically change between white and black during the SWV operation, while

a yellow surface was finally obtained after the CA operation. These black and yellow layers were OD-AgO_x and OD-Ag, respectively. XRD confirms the mono-constituent Ag⁰ in the prepared OD-Ag (same as Ag foil), in comparison to OD-AgO_x, possessing the characteristic diffraction plane of Ag₂O(111) at 32.8°. XPS exhibited a negative shift of 0.3 eV in the binding energy of both Ag 3d peaks (3d_{3/2} and 3d_{5/2}) for OD-AgO_x, as compared to Ag foil and OD-Ag. In addition, OD-AgO_x has much lower Ag 3d peak intensity than Ag foil and OD-Ag, because of the higher coverage of oxygen atoms on surface.

[0060] FIGS. 40A-F show the characterization of the surface morphology of OD-Ag. FIGS. 40A-B are atomic force microscopy (AFM) 3D images of Ag foil and OD-Ag, respectively. FIGS. 40C-D are AFM 2D images of Ag foil and OD-Ag, respectively, with a 7- μ m section height profile graph inserted. FIGS. 40E-F are low-magnification SEM images of OD-Ag.

[0061] FIGS. 41A-B show the measurement of ECSA for the Ag electrodes. FIG. 41A is the cyclic voltammograms of Ag foil, OD-Ag, and Ag NPs/Ag in the electrolyte consisting of 5 mM Pb(NO₃)₂, 10 mM HNO₃, and 10 mM KCl. The scan rate was 10 mV s⁻¹. The peak for monolayer UPD of Pb was used for ECSA calculation, which corresponds to a charge of 1.67 \times 10⁻³ cm² μ C⁻¹ (Kim et al., "Achieving Selective and Efficient Electrocatalytic Activity for CO₂ Reduction Using Immobilized Silver Nanoparticles," *J. Am. Chem. Soc.* 137:13844-13850 (2015), which is hereby incorporated by reference in its entirety). FIG. 41B is the summary of ECSA of the Ag electrodes.

[0062] FIGS. 42A-B show the NO₃RR in 0.1 M KCl (pH=4) with 0.1 M NO₃⁻ for 1 h. The geometric area of all electrodes was 4 cm². FIG. 42A is a plot of the conversion of NO₃⁻ on Ag foil and OD-Ag. FIG. 42B is a graph of the FE and NO₂ selectivity on OD-Ag.

[0063] FIGS. 43A-E show the comparison of OD-Ag with a commercial nano-Ag catalyst (OD-Ag and Ag NPs/Ag (80-100 nm), loading of 1.5 mg_{Ag} cm⁻²). FIG. 43A is an SEM image of Ag NPs/Ag (with Nafion as the binder). FIGS. 43B-B show the linear sweep voltammograms in 0.1 M KCl, 0.1 M KCl with 0.1 M NO₃⁻ and 0.1 M KCl with 0.1 M NO₂⁻, respectively. FIG. 43D is a graph of NO₃⁻ conversion in 0.1 M KCl (pH=4) with 0.1 M NO₃⁻ at -1.00 V_{Ag/AgCl} for 1 h. FIG. 43E is a table summarizing the area-specific NO₃RR activities. Both OD-Ag and Ag NPs have a similar average size of Ag particles (~100 nm vs. 80-100 nm), very close ESCA (27.1 cm² vs. 25.9 cm², FIG. 41B), and with the same sized Ag foil (2 cm²) as electrode substrate.

[0064] FIG. 44 is a graph of the faradaic efficiency of NO₃RR on OD-Ag with 0.05 M and 0.01 M NO₃⁻. Left columns: 0.05 M NO₃⁻. Right columns: 0.01 M NO₃⁻. The electrolyte was 0.1 M KCl (pH=4). The applied charge was 29 C which is the theoretical charge required for NO₃RR to NO₂⁻ in the system. The geometric area of the electrode was 6 cm² for -1.00 and -1.10 V_{Ag/AgCl} with 0.01 M NO₃⁻, and 2 cm² for all other conditions. The error bars represent the standard deviation for at least three independent measurements.

[0065] FIG. 45 is a graph of product selectivity and NO₃⁻ conversion of NO₃RR on OD-Ag and Cu foil at -1.50 V_{Ag/AgCl}. The electrolyte was 0.1 M KCl (pH=4) and the geometric area of the electrodes was 2 cm². The applied charge was 29 C.

[0066] FIGS. 46A-B show the electrochemical reduction of 0.01 M NO₂ on OD-Ag. The electrolyte was 0.1 M KCl (pH=4) and the geometric area of OD-Ag was 2 cm². FIG. 46A is a plot of chronoamperometry (CA) profiles. FIG. 46B is a graph of product selectivity and NO₂⁻ conversion for 1-hour electrolysis.

[0067] FIGS. 47A-D show the characterization of OD-Ag after NO₃RR. Electrolysis was performed in 0.1 M KCl (pH=4) with 0.1 M NO₃⁻ at -1.00 V_{Ag/AgCl} for 1 h. FIG. 47A shows the XRD patterns. FIG. 47B shows the XPS Ag 3d spectra. FIG. 47C is an SEM image of OD-Ag. FIG. 47D is a table of the Ag⁺ content in the electrolyte by ICP-OES after electrolysis.

[0068] FIG. 48 shows the linear sweep voltammograms of OD-Ag in 0.1 M KCl (pH=4) with different concentrations of NO₃⁻. The geometric area of the electrodes was 4 cm².

[0069] FIGS. 49A-C show the data from the kinetics and mechanism study of NO₃RR on OD-Ag. FIG. 49A is a plot showing NO₃⁻ order dependence fitting in 0.1 M KCl with different concentrations of NO₃⁻ (pH=4) at -0.85 V_{Ag/AgCl} with data obtained from LSV curves in FIG. 48. FIG. 49B shows the LSV of OD-Ag in 0.1 M KCl with 0.1 M NO₃⁻ at different ratios of D₂O/H₂O as the solvent. FIG. 49C is a graph of the concentration of produced ¹⁴NH₄⁺ and ¹⁵NH₄⁺ in 0.1 M KCl containing 0.025 M ¹⁵NO₃⁻ and 0.025 M ¹⁴NO₂⁻ at the potential of -1.30 and -1.50 V_{Ag/AgCl}, respectively, with different applied charges. The methods of isotopic products detection are detailed Example 3 (infra), and their calibrations are shown in FIGS. 36A-B.

[0070] FIG. 50 is a NO₂⁻ partial current density Tafel plot. The data was obtained from the Linear sweep voltammograms (LSV) with a potential range from -0.79 V (onset potential of NO₃RR) to -0.90 V_{Ag/AgCl}. LSV was performed on OD-Ag in 0.1 M KCl (pH=4) with 0.1 M of NO₃⁻ (FIG. 41C). The geometric area of the electrodes was 4 cm².

[0071] FIGS. 51A-B show the activation energy for NO₃RR on OD-Ag at -1.10 V_{Ag/AgCl}. FIG. 51A shows the linear sweep voltammograms of OD-Ag in 0.1 M KCl (pH=4) with 0.05 M NO₃⁻ at different temperatures. The geometric area of OD-Ag was 4 cm². FIG. 51B is an arrhenius plot for NO₃RR on OD-Ag at -1.10 V_{Ag/AgCl}.

[0072] FIGS. 52A-B are graphs of NO₃RR on OD-Ag with 29 C applied charge at -1.10 V_{Ag/AgCl}. The electrolyte was in 0.1 M KCl (pH=4) with 0.01 M NO₃⁻ and the geometric area of OD-Ag was 6 cm². FIG. 52A is a plot of the current density-time profile with applying a theoretical charge of 29 C for complete convert 0.01 M NO₃⁻ to NO₂⁻. FIG. 52B is a graph of faradaic efficiency and NO₃⁻ conversion. The error bars represent the standard deviations of at least three independent measurements.

[0073] FIGS. 53A-B show nitrate removal by the combined electrocatalytic-catalytic process. FIG. 53A is a schematic illustration of the process. The corresponding reaction equations and conversions were inserted in the graph. FIG. 53B is a graph of the compositions of N-containing compounds in the wastewater after the first (electrocatalytic) step and second (catalytic) step of the treatment. Three solution media were tested: 0.1 M KCl, simulated waste stream from ion-exchange columns, and real-world agricultural wastewater (collected from Des Moines Water Works, Iowa), all of which were enriched to contain 0.01 M NO₃⁻ (i.e., 140 ppm-N). The detailed experimental results and other test conditions are summarized in Table 16.

[0074] FIG. 54 is a diagram of one embodiment of a set-up of an electrocatalytic-catalytic combined process. The H₂ feed was generated from a PEM water electrolyzer.

[0075] FIGS. 55A-B show the quantification of products from NO₂⁻ reduction. FIG. 55A is the on-line GC chromatogram used to detect products from the catalytic reduction of 0.5 M NO₂⁻ during different experimental periods. The retention time of N₂ was roughly 4.7 min. FIG. 55B is a graph of product selectivity of catalytic reduction of 0.5 M NO₂⁻ for 2 h. The detailed quantification method was shown in the quantification of H₂ and N₂, quantification of NO₂ and NO, and quantification of N₂O sections. The reaction conditions were shown in the catalytic reduction of NO₂ section, except for the outlet was connected to the On-line GC.

[0076] FIGS. 56A-C are graphs showing the results of catalytic reduction of NO₂⁻ on Pd/C. The reaction medium was 0.1 M KCl with 0.1 M KOH saturated by CO₂. The catalyst loading was 50 mg. FIG. 56A is a graph showing the selectivity of NH₄⁺ after full conversion of 7,000 and 140 ppm of NO₂⁻-N. The error bar represents the standard deviation of three independent measurements. FIG. 56B is a plot of the NO₂⁻ concentration profile during its catalytic reduction. The fitted curve assumes pseudo-first-order dependence on NO₂⁻ concentration. The observed rate constant (*k_{obs}*), the active surface area of Pd (A), and surface Pd-normalized rate constant (k) are shown in the inset table. FIG. 56C is a plot of the NO₂⁻ concentration profile for three consecutive measurements.

[0077] FIGS. 57A-B are absorbance plots of the control experiments for catalytic reduction of NO₂⁻. The conditions for control experiments were the same as catalytic reduction tests, except that no H₂ was fed. FIG. 57A is the UV-Vis spectra for 1.33 ppm of NH₄⁺-N in CO₂-saturated electrolyte stained with indophenol blue indicator, with or without adding 50 mg of Pd/C. FIG. 57B is the UV-Vis spectra for 0.7 ppm of NO₂⁻-N in CO₂-saturated electrolyte stained with Griess reagent, with or without adding 50 mg of Pd/C. The adsorption of NH₄⁺ and NO₂⁻ contributed to a decrease of 5.2% and 3.0% in the measured concentrations, respectively.

[0078] FIG. 58 shows the linear sweep voltammograms of NO₃RR in different reaction media. The electrolytes contain 0.01 M NO₃⁻ (140 ppm-N), and the geometric area of OD-Ag was 6 cm².

DETAILED DESCRIPTION

[0079] The present application relates to a system and method for removing nitrate from water.

[0080] One aspect of the present application relates to a system for removal of nitrate from water. The system includes a first reactor comprising a porous oxide-derived silver electrode (OD-Ag) for electrocatalytic reduction of nitrate (NO₃⁻) to nitrite (NO₂⁻) and a second reactor comprising a Pd-based catalyst for catalytic reduction of nitrite (NO₂⁻).

[0081] According to some embodiments, the first reactor comprises an H-type cell reactor structure.

[0082] According to some embodiments, the first reactor comprises a catholyte portion and an anolyte portion, where the catholyte portion and the anolyte portion are connected by a membrane.

[0083] One embodiment of a system of the present application is illustrated in FIG. 11. According to this embodiment, system 10 is set up for the electrocatalytic reduction

of NO₃⁻, and contains H-type cell 12 (comprising cathode or catholyte portion 14, anode or anolyte portion 16, where cathode portion 14 and anode portion 16 are separated by membrane 18). System 10 also includes NH₃ trapping solution 20, on-line GC 22 for H₂ and N₂ quantification, and off-line quantification of NO₃⁻, NO₂⁻ (via device 24) and NH₄⁺, NH₂OH, NO₂, NO, and N₂O (via device 26). FIG. 12A is a photo image corresponding to the schematic setup shown in FIG. 11. FIG. 12B is a photo image of a setup of catalytic reduction of NO₂⁻ on Pd-based catalysts in a batch reactor, in which CO₂ and H₂ were fed into the reactor.

[0084] FIG. 53A is a schematic illustration of one embodiment of an electrocatalytic-catalytic combined process for NO₃⁻-containing wastewater treatment by using a PEM water electrolyzer to generate H₂. As illustrated in FIG. 54, system 50 performs electrocatalytic NO₃⁻-to-NO₂⁻ conversion in H-type cell 52 (containing anode portion 54 and cathode portion 56, where anode portion 54 is separated from cathode portion 56 by membrane 58). Catalytic NO₂⁻-to-N₂ conversion is conducted in batch reactor 60, and H₂ is fed to batch reactor 60 from PEM-based water electrolyzer 62. Electrolyzer 62 contains cathode flow plate 64 (e.g., Pt/C), anode flow plate 76 (e.g., IrO₂), and membrane 70 (e.g., a Nafion (H⁺) membrane). Electrolyzer 62 also includes positive potentiostat 66 positioned between cathode flow plate 64 and anode gas diffusion electrodes ("GDE") 68. Electrolyzer 62 also includes negative potentiostat 74 positioned between anode flow plate 76 and cathode GDE 72. Water enters electrolyzer 62 through port 78, and H₂ exits electrolyzer 62 through port 80.

[0085] The membrane separating the anode and the cathode should be constructed from a material that is chemically resistant to the reactants and products in the NO₃RR reactions. The membrane may be, for example, an ion exchange membrane, such as a Proton Exchange Membrane, a solid electrolyte or an electrolyte gel. Proton exchange membranes are well known in the art. Exemplary proton exchange membranes that may be useful in the present application are disclosed in U.S. Pat. No. 7,183,017 to Taft et al.; U.S. Pat. No. 6,030,718 to Fuglevand et al.; U.S. Pat. No. 8,552,075 to Tsai et al.; U.S. Pat. No. 9,728,800 to Raiford et al.; and U.S. Pat. No. 7,993,791 to Zhamu et al., which are hereby incorporated by reference in their entirety.

[0086] According to some embodiments, the pH in the first reactor is at least 4. According to other embodiments, the pH in the first reactor is between about 4 and 13.

[0087] According to some embodiments, the system further comprises a sealed trap acid solution to absorb NH₃. Accumulated NH₃ in an alkaline reaction system will volatilize as a vapor NH₃, so a KCl trap solution with a pH of about 3 may be used to trap the evolved NH₃. NH₃ has a high solubility in acid conditions and existed in the form of NH₄⁺. Other examples of possible trap solutions include, but are not limited to, other aqueous acid solutions including phosphoric acid, hydrochloric acid, and sulfuric acid.

[0088] According to some embodiments, the system further comprises an online gas chromatography for H₂ quantification. The side product H₂ produced from hydrogen evolution reaction in the electrocatalytic reduction of NO₃⁻ system can be quantified by online gas chromatography (e.g., using SRI Instruments, 8610C, Multiple Gas #3), which may be equipped with HayeSep D and MolSieve 5 Å columns. Ultra-high-purity argon may be fed into the electrochemical reactor to carry the produced H₂ to online gas

chromatography for its detection and quantification. A thermal conductivity detector may be used to detect H₂. Calibration curves for H₂ (e.g., 10-10,000 ppm, Cal Gas Direct) may be established by analyzing the calibration gases. As will be apparent to a person of skill in the art, any suitable gas chromatograph instrument and inert gas may be used.

[0089] According to some embodiments, the system of the present application is a water treatment device. For example, the water treatment device can be a flow through device where contaminated water enters the device via an inlet and is treated so that clean or purified water exits the device via an outlet. Purified water can then be collected in a suitable receptacle or reservoir.

[0090] According to some embodiments, the system of the present application could directly use the side product of H₂ from the NO₃⁻ reduction system (at a large current density) for the reduction of nitrite in a heterogeneous catalytic reactor/or for hydrogenation of biomass-derived compounds (e.g., and without limitation, furfural). Such a system could be treated as an on-site H₂ production from renewable electricity for wastewater treatment or chemical production.

[0091] Another aspect of the present application relates to a method of removing nitrate from water. This method involves providing a system comprising a first reactor comprising a porous oxide-derived silver electrode (OD-Ag) for electrocatalytic reduction of nitrate (NO₃⁻) to nitrite (NO₂⁻) and a second reactor comprising a Pd-based catalyst for catalytic reduction of nitrite (NO₂⁻). Water containing nitrate (NO₃⁻) is introduced into the first reactor to cause catalytic reduction of the nitrate into nitrite (NO₂⁻) by the porous oxide-derived silver electrode (OD-Ag) and water from the first reactor is introduced into the second reactor to cause reduction of nitrite (NO₂⁻) by the Pd-based catalyst, thereby removing nitrate from the drinking water.

[0092] Suitable water sources for removing nitrate include, for example and without limitation, one or more of drinking water, agricultural river water, or water downstream from an anion exchange column in a water treatment plant.

[0093] According to some embodiments, H₂ generated from a cathode in the first reactor is used to reduce nitrite in the second reactor. This is possible because clean H₂ is generated from the first reactor and is therefore useful in the reaction occurring in the second reactor.

[0094] According to some embodiments, the method achieves a nitrate (NO₃⁻) concentration of about 1.6-2.5 ppm (as Nitrogen).

[0095] According to some embodiments, the method achieves an NH₃ concentration of about 1.1-2.5 ppm NH₃ (as Nitrogen).

[0096] According to some embodiments, the method achieves an undetectable nitrite (NO₂⁻) concentration.

[0097] According to some embodiments, after a combined process for treatment of NO₃⁻-N containing wastewater, at least about 95+% of NO₃⁻ is converted with <about 3.0, 3.1, 3.2, 3.3, 3.4, 3.5, 3.6, 3.7, 3.8, 3.9, or 4.0 ppm of NH₄⁺-N and <about 5.0, 5.1, 5.2, 5.3, 5.4, 5.5, 5.6, 5.7, 5.8, 5.9, 6.0, 6.1, 6.2, 6.3, 6.3, 6.5, 6.6, 6.7, or 6.8 ppm of NO₃⁻-N remaining, and no or essentially no NO₂⁻-N detection in any of the treated water.

[0098] According to some embodiments, molecular nitrogen gas (N₂) is a product from nitrite reduction in the second reactor. According to these embodiments, the molecular nitrogen gas (N₂) may be greater than 93%, 94%, 95%, 96%,

97%, 98%, 99%, or 100% of the product from nitrite reduction in the second reactor.

[0099] The following examples are provided to illustrate embodiments of the present application but are by no means intended to limit its scope.

EXAMPLES

Example 1—Combining Electrocatalysis and Catalysis: Application to Nitrate Reduction for Water Treatment

[0100] Experimental

[0101] Materials

[0102] Ag foil (0.5 mm thick, 99.9985%), Pt foil (0.025 mm thick, 99%), and hydroxylamine hydrochloride (99%), were purchased from Alfa Aesar. Potassium nitrate (99.7%), potassium chloride (100%), potassium dibasic phosphate (≥98%), potassium monobasic phosphate (≥99%), sodium carbonate (100%), nitric acid, hydrochloric acid, phosphoric acid, and methanol (HPLC grade) were bought from Fisher Scientific. Sodium salicylate (≥99.5%), sodium hydroxide (≥97%), sodium nitroferrocyanide dihydrate (≥99), sodium hypochlorite solution (NaOCl, available chlorine 4.00-4.99%), N-1-naphthylethylenediamine dihydrochloride (NED, ≥97%), Sulfanilamide (≥99), 5% palladium on alumina, and 5% palladium on carbon were all purchased from Sigma-Aldrich. 5% palladium on silica powder were ordered from STREM Chemical, Inc. Potassium nitrite (97%) and n-Octylamine (≥99%) were bought from Acros Organic. 8-quinolinol was purchased from TCI American. Ammonia standard solution (NH₃-N, 100 mg L⁻¹) was purchased from Hach. Plain carbon cloth, Vulcan XC-72R, and Nafion 115 membrane were purchased from Fuel Cell Store. 20% Ag on Vulcan was ordered from Premetek Co. Different concentration H₂ calibration gases were purchased from Cal Gas Direct Incorporation. Deionized water (18.2 MΩ·cm) obtained from a Barnstead E-Pure™ purification system was used for all processes.

[0103] Fabrication of OD-Ag

[0104] The OD-Ag fabrication method was based on the literature (Ma et al., "Selective and Efficient Reduction of Carbon Dioxide to Carbon Monoxide on Oxide-Derived Nanostructured Silver Electrocatalysts," *Angew Chem. Int. Ed. Engl.* 55:9748-9752 (2016), which is hereby incorporated by reference in its entirety). A piece of polycrystalline Ag foil with a total area of 4 cm² was immersed in 0.2 M NaOH solution in a one-compartment cell. Ag/AgCl served as the reference electrode and Pt foil as the counter electrode. A typical cyclic voltammetry (CV) was scanned from 0 to 1.2V (vs Ag/AgCl) with a rate of 20 mV/s on Ag foil. An asymmetric 500 HZ square-wave pulse potential ranging from 0 to 1V (vs Ag/AgCl) was applied on the Ag foil for 3 hours with both positive and negative scans. After 3 hours pulse potential treatment, a constant voltage (-1.3V vs Ag/AgCl) was applied for 10 mins to reduce the oxidized porous Ag to OD-Ag (referred to oxide-derived silver foil). The negative potential treatment for oxidized porous Ag can avoid the reduction of porous Ag oxide consumption charges interferences nitrate electroreduction.

[0105] Fabrication of Ag/C Nanoparticles

[0106] The Ag/C catalyst ink was prepared by dispersing Ag/C (20 wt. %) powder and Nafion solution in an isopropanol solution 10 mg-catalyst/mL and 20 wt % Nafion, and ultra-sonicating it to make a uniform ink. The catalyst ink

was then sprayed onto HNO₃ pretreated carbon clothes by a spray gun and the loading was controlled at 0.5 mg-Ag/cm².

[0107] ECSA Test for Ag-Based Catalyst

[0108] The electrochemical active surface area (ECSA) of Ag-based catalysts (OD-Ag, Ag foil, and Ag/C) was measured using the method of underpotential deposition (UPD) of Pb (Kim et al., "Achieving Selective and Efficient Electrocatalytic Activity for CO₂ Reduction Using Immobilized Silver Nanoparticles," *J. Am. Chem. Soc.* 137:13844-13850 (2015), which is hereby incorporated by reference in its entirety). CV was conducted in a one-compartment cell containing 5 mM Pb(NO₃)₂, 10 mM HNO₃, and 10 mM KCl, with the potential range between -0.1V to -0.48V vs (Ag/AgCl) and a scan rate of 10 mV/s. Then, the desorption peak of UPD was integrated to calculate the peak area. The ECSA of Ag foil was chosen as the baseline, and its roughness factor is 1. The ECSA roughness factor of OD-Ag and Ag/C can be calculated by Eq. 1.

$$\text{ECSA roughness factor} = \frac{\text{OD-Ag UPD area}}{\text{Ag foil UPD area}} \quad (\text{Eq. 1})$$

[0109] Characterizations

[0110] X-ray diffraction (XRD) patterns were obtained by a Siemens D500 diffractometer operated with a Cu K α source ($\lambda=1.5418 \text{ \AA}$) at 45 kV and 30 mA, and equipped with a diffracted beam monochromator (carbon).

[0111] XPS was performed on a Kratos Amicus/ESCA 3400 X-ray Photoelectron Spectrometer with Mg K α X-ray (1253.7 eV photon energy). All spectra were calibrated with the C 1s peak a 284.8 eV.

[0112] Scanning electron microscopy (SEM) was performed on a FEI Quanta 250 field-emission scanning electron microscope.

[0113] The Inductively coupled plasma-optical emission spectroscopy (ICP-OES, Perkin Elmer Optima 8000 instrument) was utilized to determine the Ag⁺ concentration. 1000 ppm Ag⁺ in 5% (v/v) nitric acid standard was prepared and diluted by 5% nitric acid to get the calibration curve with different Ag⁺ concentration between 0.6-100 ppb. Samples were also diluted and prepared to get a 5% nitric acid solution for tests.

[0114] H₂ Chemisorption

[0115] The Pd active surface areas were measured by a dynamic chemisorption technique with H₂ as the probe molecule with a Micromeritics ASAP 2920 analyzer. The catalyst was first reduced by 50 ml/min 10% H₂-Ar at 200° C. for 1 h. Then 20 ml/min Ar was introduced to purge the sample at 200° C. for 1 h before the catalyst was cooled to room temperature. The catalyst was heated at a rate of 10° C./min to 35° C. After the baseline was stable on the thermal conductivity detector, a series of pulse streams of 10% H₂-Ar was injected onto the catalyst until the injected gas volume emerged from the sample tube unchanged and the detected peaks were constant in area. The stoichiometry factor for H₂ adsorption was assumed to be 2.

[0116] Ammonia Temperature Programmed Desorption (TPD)

[0117] The number and strength of the acid sites were determined by NH₃-TPD with a Micromeritics ASAP 2920 analyzer. The catalysts were first reduced by 50 ml/min 10% H₂-Ar at 200° C. for 1 h. Then, 20 ml/min Ar was introduced to purge the sample while reducing the sample temperature to 50° C. After the baseline was stable on the thermal conductivity detector, 10% NH₃-Ar was introduced to the sample for adsorption. After 1 hour, 10%

NH₃-Ar was switched to UHP Ar to sweep out the physisorbed ammonia from the catalyst surfaces. Under 20 ml/min Ar flow, the catalysts were heated to 750° C. with a temperature ramp of 10° C./min and were held at 750° C. for 30 minutes. The quantity of desorbed ammonia was quantified by integrating the area under each peak. However, the TCD signal of ammonia was not characterized, so the values from each catalyst were relative but not absolute.

[0118] Electrocatalytic Reduction Measurements

[0119] All electrochemical tests were conducted in the three-electrode configuration by a BioLogic SP-300 electrochemical workstation. The reference electrode used was an Ag/AgCl (Pine Research Instrumentation). Resistance between the working electrode and reference electrode was determined by potentiostatic electrochemical impedance spectroscopy and compensated 85% by the workstation. All current density was normalized based on geometric surface area. Potentials (E) were reported versus the reversible hydrogen electrode (RHE), as calculated by Eq. 2.

$$E(\text{vs. RHE}) = E(\text{vs. Ag/AgCl}) + 0.197 \text{ V} + 0.059 \text{ V} \times \text{pH} \quad (\text{Eq. 2})$$

[0120] Cyclic voltammetry (CV), chronoamperometry (CA), and chronopotentiometry (CP) tests were all conducted in the H-type cell along with Ultra-high-purity Argon purged to the cathode chamber during test to remove oxygen. The electrolyte volume in both chambers were 15 ml and the chambers were separated by a K⁺-type Nafion 115 membrane. The reference electrode was Ag/AgCl, and the counter electrode was a graphite rod. CV tests were conducted at 20 mV/s scan rate without stirring. CA tests were performed at various voltages and reaction time. CP tests were performed at constant current (-25 mA) for 1-hour reaction. The cathode electrolyte was stirred by a PTFE-coated magnetic bar (size: 1x5/16") at 350 rpm. The H-type cell was first connected to a sealed 25 ml pH=3 KCl trap solution to adsorb exceeded NH₃, and then connected to an on-line GC to quantify H₂. The reactor configuration is shown in FIG. 11.

[0121] Nitrate conversion (C) and products selectivity (S_i) can be calculated by Eq. 3 and Eq. 4.

$$C = \frac{(n_0 - n/n_0) \times 100\%}{n_0} \quad (\text{Eq. 3})$$

$$S_i = \frac{n_i/n_0 - n}{n} \times 100\% \quad (\text{Eq. 4})$$

where "n₀ is initial moles of nitrate;" "n" is the remaining moles of nitrate, "n_i" is the moles of products (i=NH₃, NO₂⁻, or NH₂OH).

[0122] The Faraday efficiency can be calculated by Eq. 5.

$$FE_i = \frac{n_i z_i F}{Q} \times 100\% \quad (\text{Eq. 5})$$

where "z_i" is the number of electrons needed for one molecule product (z=2 for NO₂⁻, z=6 for NH₂OH, and z=8 for NH₃); F is the Faradic constant (96,485 C mol⁻¹), Q is the total charge passed during the long time CA or CP test.

[0123] Catalytic Reduction Measurements

[0124] Catalytic reduction was conducted in the same H-type cell reactor used for electrocatalytic reduction measurements. The digital images of the reactor for electrocata-

lytic and catalytic reduction shown in FIGS. 12A-B. 15 ml sample solution was purged with CO₂ (purge rate 50 ml/min) for 15 mins to obtain buffer condition. Then, H₂ and CO₂ were purged with two gas dispersion tubes (ACE GLASS, 7 mm (OD)×210 mm (length)), and the outlet gas fed into a pH=3 trap solution. Some contents of Pd-based catalysts were dispersed in the solution with a stirring rate of 800 rpm. Sample solutions can be extracted from the small hole in the side wall of the H-cell reactor at different reaction time, and then diluted for analysis of the product concentration.

[0125] The observed reaction rate constant k_{meas} (unit: L g_{pd}⁻¹min⁻¹) was calculated assuming first-order dependence on nitrate concentration (H₂ was in excess) by Eq. 6.

$$d(\text{NO}_2^-)/dt = kC(\text{NO}_2^-) \frac{d(\text{NO}_2^-)}{dt} = -kC(\text{NO}_2^-) \quad (\text{Eq. 6})$$

where $C(\text{NO}_2^-)$ is the concentration of nitrate (unit: mg L⁻¹) and t is the reaction time (unit: min).

[0126] Products Quantifications

[0127] (1) High Performance Liquid Chromatography (HPLC) for nitrate and nitrite quantification: The samples containing nitrate and nitrite were collected and diluted with deionized water, and then filtered through a 0.4 micron filter before analysis by HPLC (Agilent Technologies 1260) which was equipped with a variable wavelength detector (VWD, G1314B). The quantification method was based on the literature (Chou et al., "A High Performance Liquid Chromatography Method for Determining Nitrate and Nitrite Levels in Vegetables," *Journal of Food and Drug Analysis* 11:233-238 (2003), which is hereby incorporated by reference in its entirety). The wavelength used for both nitrate and nitrite detection was 213 nm. The column (Phenomenex Inc., Gemini C18, 3 μm 110 Å) for analysis was operated at 25° C. with a binary gradient pumping method to pump mobile phase at 0.4 mL min⁻¹ flow rate. Mobile phase was 30% MeOH, 70% water, and 0.01 M Octylamine mixed solution, and its pH was adjusted to 7.0 with 85% Phosphoric Acid. The pH adjustments for all of the experiments were performed by pH probe (Hach company). Each run time was 30 minutes, nitrite and nitrate retention time were around 17 and 19 minutes, respectively. The calibration curve for nitrate and nitrite quantification were showed in FIGS. 13A-B.

[0128] (2) On-Line Gas Chromatography (GC) for H₂ quantification: H₂ evolved from the cathode side was quantified by an On-line GC (SRI Instrument 8610C MG #3), which was equipped with HaySep D and MolSieve 5 Å columns. A scheme used for gas flow path from ultra-high-purity Argon (Airgas, 99.999%) as carrier gas through the H-type cell reactor and connected to On-line GC was shown in FIG. 11. A thermal conductivity detector (TCD) was used to detect Hz. H₂ quantification details and its calibration curve is shown in FIG. 14.

[0129] (3) UV-Vis for other products quantification: The nitrite concentration after the catalytic reduction was quantified by UV-Vis spectrophotometer (Shimadzu UV 2700), which showed results quickly. Spectrophotometry measurement of NO₂ concentration was by Griess reagent (FIG. 15). NH₃ (Kim et al., "Lithium-Mediated Ammonia Synthesis from Water and Nitrogen: A Membrane-Free Approach Enabled by an Immiscible Aqueous/Organic Hybrid Electrolyte System," *Green Chemistry* 21:3839-3845 (2019),

which is hereby incorporated by reference in its entirety) (FIG. 16) and NH₂OH (Burrell, "Spectrophotometric Method for Determining Hydroxylamine Reductase Activity in Higher Plants," *Analytical Chemistry* 27:1664-1665 (1955), which is hereby incorporated by reference in its entirety) (FIG. 17) were also quantified by UV-Vis spectrometer.

[0130] Results and Discussion

[0131] Synthesis and Characterizations of Oxide-Derived Ag (OD-Ag) Catalysts

[0132] OD-Ag was synthesized using square-wave pulsed potential for continuous oxidation and reduction of polycrystalline Ag foil. FIG. 18 showed the cyclic voltammetry (CV) result of Ag foil in 0.2 M NaOH. The oxidation peaks during positive-going scan are assigned to Ag₂O, Ag₂O₂, Ag₂O₃, and water oxidation, and the reduction peaks correspond to the reduction of these Ag oxides (*Uhlig's Corrosion Handbook*, Second Edition, Edited by R. Winston Review, which is hereby incorporated by reference in its entirety). FIGS. 19A-C showed the digital images of polycrystalline Ag foil, Ag oxide, and OD-Ag. Color changes at different stages were observed during the OD-Ag fabrication process. SEM images (FIGS. 1A-B) of the OD-Ag showed that nanoporous structure (particle size is 150-200 nm) was formed on the Ag foil surface. After electrocatalytic reduction of nitrate (for 2 hours), slight structure changes were observed in both morphology and particle size (250-300 nm), as shown in FIGS. 20A-B.

[0133] The diffraction peaks of Ag/C Ag foil and OD-Ag in XRD patterns before and after the electrocatalytic reduction (FIG. 2), showed that OD-Ag was in its metal Ag⁰ state, and nitrate reduction process did not change the crystalline structure of OD-Ag. Based on Scherrer equation, the calculated Ag/C crystalline size was 41 nm.

[0134] To further analyze the compositions of OD-Ag before and after electrocatalytic reduction of nitrate, X-ray photoelectron spectroscopy (XPS) characterizations were conducted. As shown in FIG. 3A, the Ag_{3d_{5/2}} peak at 368.2 eV was observed for polycrystalline Ag foil. For OD-Ag before and after nitrate electrocatalytic reduction, the Ag_{3d_{3/2}} and Ag_{3d_{5/2}} peaks were at the same position as the Ag foil. The XPS results are consistent with the XRD patterns, indicating that both as-synthesized OD-Ag and the one after electroreduction are in the Ag⁰ metal state. Inductively coupled plasma optical emission spectrometry (ICP-OES) (Table 1) results showed Ag foil, Ag/C, and OD-Ag were stable and durable in the course of electrocatalytic reduction of nitrate, with negligible Ag leaching issue (detected [Ag⁺]: <5 ppb).

TABLE 1

ICP-OES Results After Nitrate Electrocatalytic Reduction	
Sample Name	Ag ⁺ Leaching Concentration (ppb)
Ag/C	3.14
Ag foil	4.90
OD-Ag	4.86

[0135] The electrochemical surface areas ("ECSA") of Ag foil, Ag/C, and OD-Ag were measured by underpotential deposition (UPD) of the Pb-stripping method (FIG. 21), and the ECSA roughness factor was estimated based on polycrystalline Ag foil (its ECSA factor was normalized as

1). The OD-Ag fabrication method has been optimized, and their corresponding ECSA factors under different synthesis conditions were shown in Table 2. A square-wave potential scan using 500 Hz pulse frequency for 3 hours was found to give the highest ECSA factor of 12.6, which is a 12.6 times higher electrochemically active surface area of OD-Ag than that of the Ag foil. Ag/C (0.5 mg/cm²) also showed 7.2 times higher surface area than Ag foil, thus serving as a good control sample for comparison with OD-Ag.

TABLE 2

Relative ECSA Factor of Ag Foil and OD-Ag with Different Synthesis Parameters	
Materials	Relative Roughness Factor*
Ag foil	1
Ag/C nanoparticles	7.25
OD-Ag 250 Hz forward + reverse scan	5.66
OD-Ag 500 Hz only forward scan	7.04
OD-Ag 500 Hz forward and reverse scan	12.64

$$* \text{Relative roughness factor} = \frac{\text{OD-Ag UPD area}}{\text{Ag foil UPD area}}$$

$$\text{OD-Ag UPD area/Ag foil UPD area}$$

[0136] Electrocatalytic Reduction of Nitrate (NO₃⁻)

[0137] Cyclic Voltammetry (CV) Tests: Cu has been widely studied for electrocatalytic reduction of NO₃⁻, which has been known to promote nitrate reduction (Reyter et al., "Study of the Electroreduction of Nitrate on Copper in Alkaline Solution," *Electrochimica Acta* 53:5977-5984 (2008); Yoshioka et al., "Electrocatalytic Reduction of Nitrate to Nitrous Oxide by a Copper-Modified Covalent Triazine Framework," *J. Phys. Chem. C* 120:15729-15734 (2016), which are hereby incorporated by reference in their entirety). However, Ag has rarely been investigated. In this work, the activity of nitrate reduction on the Ag foil electrode was evaluated by CV in a self-designed H-type cell, and was compared with that on Cu foil. FIGS. 3A-B exhibited that the onset potential for nitrate reduction (red curve) on both catalysts was almost identical (~-0.9V vs Ag/AgCl). However, on the Ag foil, the onset potential difference between NO₃⁻ reduction and for NO₂⁻ reduction (blue curve) was 260 mV, which is much larger than the onset potential difference of 86 mV on polycrystalline Cu foil. In addition, the Ag foil also showed larger onset potential difference between NO₃⁻ reduction and HER, as compared to the Cu foil (360 mV vs 320 mV). This suggests that NO₂⁻ is unreactive in a broader potential window on Ag foil.

[0138] CV tests were then conducted on three Ag catalysts: Ag foil, Ag/C, and OD-Ag, as shown in FIGS. 3B-D. On Ag/C and OD-Ag, the onset potentials for NO₃⁻ reduction, NO₂⁻ reduction, and HER were -0.80V, -1.05V, -1.10V; and -0.76V, -0.96V, -1.13V, respectively. They were positively shifted about 100-200 mV, as compared with the Ag foil (-1.00V, -1.29V, and -1.35V). This was attributed to the particle size effect, the nano-sized Ag catalysts (Ag/C and OD-Ag) facilitate adsorption of NO₃⁻, NO₂⁻, and H on the electrode surface. Thus, all the onset potentials for these reactions positively shifted, which indicates nano-sized OD-Ag and Ag/C can save energy input for nitrate reduction. Furthermore, by comparing the current density of

these three Ag-based catalysts, the sequence of nitrate reduction activity followed: OD-Ag > Ag/C > Ag foil. For example, at -1.1 V, the current density for OD-Ag, Ag/C, and Ag foil was -13.45 mA/cm², -5.37 mA/cm², and -0.18 mA/cm², respectively. Therefore, using OD-Ag can achieve NO₃⁻ reduction with the highest NO₃⁻ reduction activity and highest selectivity to NO₂⁻, with minimal side.

[0139] Chronoamperometry (CA): The state-state electroreduction of nitrate was conducted by applying constant (chronoamperometry) on Ag and Cu foils. As shown in FIG. 4A, when the potential was negatively shifted from -0.9 V to -1.15 V, NO₃⁻ was converted to NO₂ with a high selectivity (>90%) and high faradic efficiency (>90%), with nearly no NH₃ produced (<0.5% selectivity). As potential further decreased to -1.25 V, the NH₃ selectivity was increased to around 1%, and the faradic efficiency of NH₃ over 3%. The increased selectivity and faradic efficiency to NH₃ indicate a more negative potential would promote deep reduction of NO₂ to NH₃. Further, as shown in FIG. 4C, there was nearly no HER as the side reaction in the applied potential range (-0.9V~-1.25 V), which suggested NO₃⁻ reduction can, to some extent, suppress HER on Ag foil. Even higher NO₃⁻ conversion was achieved on Cu foil (18% at -1.0V and 26% at -1.15V, see FIG. 4B), the NO₂ selectivity struggled at 73% to 78%. The NH₃ selectivity of >3% and NH₃ faradic efficiency of >13% at -1.15V, are much higher than that on Ag foil.

[0140] NO₃⁻ reduction on nano-sized OD-Ag and Ag/C catalysts were then studied. On Ag/C (FIG. 5A), it showed a NO₂⁻ selectivity of >90% at the potential range of -0.9 V to -1.25 V. However, NH₃ selectivity was increased to >2%. When more negative potential was applied, the faradic efficiency of NO₂⁻ on Ag/C was decreased from 97% at -0.9V to only 77% at -1.25V, and faradic efficiency of NH₃ was increased from <2% to over 8% (FIG. 5C). A control experiment on a plain carbon cloth was performed to test whether the carbon support led to the increased NH₃ production. In FIG. 25 and Table 3, the CV showed almost no potential difference between NO₃⁻ and NO₂⁻ reduction, which suggests that the generated NO₂⁻, can be readily reduced to NH₃, rather than stay as NO₂⁻. The 1 h-CA test at -1.25 V showed only 1.7% NO₃⁻ is converted, with >10% NH₃ faradic efficiency. Moreover, on Ag/C, the side reaction HER occurred (FIG. 5C), and selectivity to H₂ was increased to -5% and 8% at -1.15V and -1.25V, respectively. The increased H₂ production might be attributed to the interactions between carbon and Ag nanoparticles, which facilitate hydrogen evolution reaction.

TABLE 3

CA Test Result on Carbon Cloth				
Reaction Condition	NO ₃ ⁻ Conversion (%)	Charge Passed (C)	NO ₂ ⁻ faradic efficiency (%)	NH ₃ faradic efficiency (%)
-1.25 V vs Ag/AgCl	1.7	5.0	70.5	10.3

[0141] In comparison, OD-Ag showed very high activity for NO₃⁻ reduction, with a conversion of 5-6 times higher than Ag/C, and 8-10 times higher than Ag foil (FIG. 5B). Even at such a high conversion, most NO₂⁻ selectivity was kept very high >95% (except for -1.25V), while NH₃ selectivity (<0.4%) and faradic efficiency (1.3%) were main-

tained extremely low, which were much lower than that on Ag/C (FIGS. 5A-D). It is reasonable to conclude that the nitrate reduction activity and product selectivity were dependent not only on the size of Ag catalysts, as nanosized catalysts (OD-Ag and Ag/C) performed better than bulk Ag foil, but also on the structure of Ag catalysts. OD-Ag showed better NO_3^- reduction performances than Ag/C. The selectivity to nitrite was potential controlled, thus, deep reduction reactions can be minimized by choosing the appropriate potential range. Furthermore, a small amount of NH_2OH was detected on all Ag-based catalysts (close to 0.5% faradic efficiency) at relatively negative potentials (-1.15 V and -1.25 V).

[0142] 2.2 pH Effect on Electrocatalytic Reduction of Nitrate

[0143] Constant current tests were applied to study the pH effect on nitrate reduction (FIGS. 6A-B). Under strong acidic conditions ($\text{pH}=1$), the activity of nitrate reduction was very low. Nitrate conversion was only 1.3% with a relatively low selectivity of 29% to NO_2^- , and fairly high selectivity of 61% to NH_3 . HER was the main reaction, with a H_2 faradaic efficiency of $\sim 87\%$. NH_2OH was detected with $\sim 1\%$ selectivity at $\text{pH}=1$. As pH was increased to 2, the NO_2^- selectivity increased and NH_3 decreased, however still nearly 7% charges went to H_2 . In sharp comparison, in the pH range of 4 to 13, the NO_3^- conversion, NO_2^- (all showed $>90\%$) and NH_3 (all showed $<0.4\%$) selectivity, and their corresponding faradic efficiency (in range of 91%-94%) remained unchanged. Therefore, nitrate reduction is pH independent from a weak acidic to a strong basic system (under experimental conditions, pH: 4-13).

[0144] Electrocatalytic Reduction of Nitrite (NO_2^-): Electrocatalytic reduction of nitrite on OD-Ag at both -1.25 V and -1.30 V showed high selectivity to NH_3 ($>90\%$, in FIG. 7A) and moderate NH_3 faradic efficiency ($>40\%$, FIG. 7B). However, NO_2^- conversion was not high ($<3\%$) at these two potentials, because HER was much more facile than NO_2^- reduction. NH_2OH was further tested at these two voltages, which was consistent with the results of NO_2^- electrocatalytic reduction. Therefore, currently it remains a big challenge to employ electrocatalysis to reduce NO_2^- to a final product of N_2 .

[0145] H_2 Influence on Electrocatalytic Reduction of NO_3^- to NH_3 : It was found that NH_3 selectivity was quite high in acidic electrolyte, even though the nitrate conversion was low. Two mechanisms were hypothesized: (1) HER was dominant in acidic conditions, because the strong H adsorption would form a high H-coverage on Ag electrodes, and occupy most of the active sites, thus facilitating formation of N—H bond to form NH_3 . (2) Strong HER would generate a lot of H_2 in the system, which can facilitate subsequent reduction of some intermediates to NH_3 through non-faradaic processes. To clarify which mechanism is dominant, electrocatalytic reduction of NO_3^- at -1.0 (no H_2 generated at this voltage) was compared with hydrogen (H_2) purge and argon (Ar) purge. The results (Table 4) showed NO_3^- conversion and charges passed were almost the same, but the detected NH_3 in H_2 purged system was about 1.5 times higher than that in Ar-purged system. Therefore, these results supported the hypothesis that NH_3 generation depended not only on the applied voltage, but also on the on-site generated H_2 , which may favor non-faradic reduction of nitrate reduction intermediates (e.g., NO_x intermediates) to NH_3 .

TABLE 4

Nitrate Reduction at OD-Ag Compared with H_2 Purge and Ar Purge			
Reaction Condition	NO_3^- Conversion (%)	Charge Passed (C)	NH_3 Concentration (10^{-4} mol/L)
-1.0 V with 100 ml/min H_2	22.85	67.09	3.58
-1.0 V with 100 ml/min Ar	22.10	67.17	2.55

[0146] NH_2OH Generation: NH_2OH was qualitatively detected at the level of 0.3-0.4 ppm at very negative potential (-1.15 V to -1.25 V vs Ag/AgCl) and very strong acid conditions ($\text{pH}=1$). The two conditions are common in that they both have relatively strong HER and relatively high NH_3 production. It was hypothesized that the mechanism of NH_2OH generation is similar to NH_3 formation, which can be facilitated by: (1) more H (produced from faradic process) adsorbed on the active sites of catalysts promote formation of N—H bond for NH_2OH generation; and (2) H_2 produced in the system could further reduce NO_3^- -reduction intermediates (pure non-faradaic process) to generate NH_2OH . The second hypothesis seemed to be implausible, based on the results of a few control experiments. (1) Catalytic reduction of NO_3^- and NO_2^- by H_2 over OD-Ag did not produce any NH_2OH (FIG. 23E); (2) Electrocatalytic reduction of NO_3^- at -1.0 V with H_2 purging did not produce NH_2OH . Therefore, NH_2OH was likely produced from faradaic-related processes (electrochemical processes). Further, NH_2OH was verified as the intermediate to NH_3 , because no matter if electrocatalysis or catalysis (by H_2) was applied to reduce NH_2OH , NH_3 was the only product with nearly 100% selectivity (FIGS. 23A, 23B, and 23D) and high faradic efficiency (other charges went to HER) (FIG. 23C).

[0147] Full Conversion NO_3^- to NO_2^- Via Electrocatalytic Reduction on OD-Ag

[0148] Previously, OD-Ag was used to achieve high NO_2^- selectivity and faradic efficiency, and almost no NH_3 and H_2 were produced. However, it is difficult to achieve NO_3^- conversion of 100%. Therefore, a NO_3^- solution with a lower concentration of 0.01

[0149] M (mimicking nitrate concentration of the downstream leavening the water treatment plant) was tested, and nearly 100% NO_3^- was electrocatalytically converted to NO_2^- at -1.1 V . When a constant voltage was used with a charge of 29° C . (theoretical 28.9° C .), 93% NO_3^- conversion, 94% NO_2^- selectivity, and 0.8% NH_3 selectivity were achieved (FIG. 8). By sacrificing NO_2^- faradic efficiency through increasing the total charge to 32.2° C ., NO_3^- conversion can be increased to 99.8%.

[0150] Full Elimination of NO_2^- Via Catalytic Reduction on Pd-Based Catalysts

[0151] High NO_3^- conversion and high NO_2^- selectivity can be achieved through an electrocatalytic process using the OD-Ag electrode. However, electrocatalytic reduction of NO_2^- can only produce NH_3 . Therefore, a catalytic process was used for NO_2^- reduction on three commercial Pd catalysts. 0.01M NO_2^- as a feedstock can be eliminated completely on Pd-based catalysts. NO_2^- solution samples were taken at a regular time interval, diluted, and analyzed immediately by a spectrometry method. The H_2 flow rate

was first to be optimized to eliminate the limitation of H₂ transport on reaction kinetics (FIG. 24). When H₂ flow rate is >25 ml/min, the NO₂⁻ reduction rate did not change. Therefore, the H₂ flow rate of 25 ml/min was used for all NO₂⁻ reduction experiments. A series of rigorous control experiments (FIG. 25) showed Pd-based catalysts worked efficiently for catalytic reduction of NO₂⁻ with only a trace amount of NH₃ produced, but very low activity for NO₃⁻ reduction. CO₂ buffer was important in the reduction system, as has been reported previously. OD-Ag showed no activity towards catalytic reduction of NO₃⁻ and NO₂⁻, and Ag nanoparticles exhibited very low activity for NO₂ reduction. Therefore, choosing Pd-based catalysts for NO₂ reduction was necessary. The selectivity of the side product NH₃ depends on the catalyst content for nitrite reduction on Pd/C catalyst (FIG. 26). The NH₃ production can be effectively minimized by increasing catalyst loading in the system, and the lowest NH₃ selectivity was achieved using 25 mg 5% Pd/C. This is probably because H₂ is readily adsorbed and occupied on most Pd surfaces when the Pd loading is low, thus facilitating formation of NH₃ by supplying sufficient N—H bonding.

[0152] The rate constants for 0.01M NO₂ reduction on the three Pd-based catalysts were calculated and shown in FIGS. 9A-B. 5% Pd/C had the highest NO₂⁻ reduction rate of 3.54 L g_{pd}⁻¹ min⁻¹, which is much higher than 5% Pd/Al₂O₃ (0.80 L g_{pd}⁻¹ min⁻¹) and 5% Pd/SiO₂ (0.37 L g_{pd}⁻¹ min⁻¹). This indicates that 0.01M NO₂⁻ (produced from electrocatalytic reduction of NO₃⁻) can be completely removed in the same H-type cell reactor within 5 mins. To directly compare the activity of Pd, the apparent turn over frequency (“TOF”) of each catalyst was calculated based on the active surface area of Pd determined by H₂ chemisorption, as shown in Table 5. It turned out that the Pd dispersion varied from support to support, hence the intrinsic reaction rate on Pd/Al₂O₃ is lower than that on Pd/SiO₂, although the reaction rate was higher on Pd/Al₂O₃. The difference of TOF on various support might result from the different intrinsic kinetic on Pd, due to the so-called metal-support interaction. However, the possibility that the supports participate in the reaction cannot be completely ruled out. The NH₃ selectivity (all <1.5%) after full conversion (complete removal) of NO₂ was: 0.7% on 5% Pd/SiO₂, 0.9% on 5% Pd/Al₂O₃, and 1.4% on 5% Pd/C, respectively. The corresponding NH₃ concentration was: 0.8 ppm as N, 1.1 ppm as N, and 1.7 ppm as N, for 5% Pd/SiO₂, 5% Pd/Al₂O₃, and 5% Pd/C, respectively. Therefore, 5% Pd/SiO₂ showed the lowest NH₃ residual concentration in the final solution. Stability tests of these three Pd-based catalysts showed no apparent activity drop for three continuous reactions (FIGS. 10A-C). The calculated rate constant was 0.37±0.02, 0.80±0.02, and 3.54±0.47 for 5% Pd/SiO₂, 5% Pd/Al₂O₃, and 5% Pd/C, respectively.

TABLE 5

TOF Test Results for Nitrite Catalytic Reduction			
Catalyst	5% Pd/SiO ₂	5% Pd/Al ₂ O ₃	5% Pd/C
Pd Dispersion	4% (25 nm)	16% (6 nm)	11% (9 nm)
Pd Active surface area (m ² /g catalyst)	0.9658	3.57805	2.4334
			5% Pd loading, so 48 m ² /g _{pd} , about 10.4 nm.
TOF(s ⁻¹)	0.035	0.026	0.195

[0153] However, since SiO₂ and Al₂O₃ are well known for their acidic properties, NH₃ might be adsorbed on the catalysts, the measured concentration of NH₃ in the solution would not be able to account for the entire amount of NH₃ produced in the reaction. Therefore, the adsorption of NH₃ on catalysts was observed. In the presence of a solution, the NH₃ adsorption effect was due to different iso-electric point (IEP) of the oxide supports (Toebes et al., “Synthesis of Supported Palladium Catalysts,” *Journal of Molecular Catalysis A: Chemical* 173:75-98 (2001), which is hereby incorporated by reference in its entirety). When pH value is >IEP, the Pd surface becomes negatively charged and prefers to adsorb cations, such as Pd(NH₃)₄²⁺. Silica is an acidic oxide and aluminum is an amphoteric oxide, which can adsorb cations at relatively high pH. This suggests the possibility that NH₃ can be adsorbed on the catalysts; the measured NH₃ concentration by colorimetric method is lower than that of all produced NH₃. Some control experiments were conducted to test this hypothesis. NH₃ concentrations were compared among blank (no catalyst) solutions and the ones with addition of 50 mg 5% Pd/C, 50 mg 5% Al₂O₃, or 50 mg 5% Pd/SiO₂, respectively. NH₃ adsorption quantity depended on both pH and reaction time. To obtain the adsorption rate and saturated (equilibrium) adsorption quantity on each catalyst, the NH₃ concentration in the solution was measured at different times after they were added in catalyst suspensions. The results of NH₃ quantification after the immediate addition of NH₃ (at t=0) in different systems are shown in FIGS. 27A-D). (1) In weak acid solution (pH=3 and CO₂ buffer solution), NH₃ adsorption on all three Pd-based catalysts was negligible. (2) At neutral pH (dilute by DI-water), adsorption of NH₃ on Pd/C was small (close to 0), while almost 20% and 49% NH₃ adsorption on Pd/Al₂O₃ and Pd/SiO₂, respectively. (3) In basic solution, only Pd/C showed NH₃ adsorption of 17%. (4) The reason for NH₃ adsorption was not due to carbon, because no NH₃ was adsorbed on carbon. The quantified NH₃ concentrations after 20 hours of addition of NH₃ are shown FIGS. 28A-C. (1) In weak acid solution, nearly no NH₃ adsorption on all three Pd catalysts. (2) At neutral pH, the NH₃ adsorption issue became more severe with longer holding time (7%, 38%, and 65% for Pd/C, Pd/Al₂O₃, and Pd/SiO₂, respectively). (3) In basic solution, all the three catalysts showed different NH₃ adsorptions (69%, 19%, and 36% for Pd/C, Pd/Al₂O₃, and Pd/SiO₂, respectively). This suggests that the NH₃ adsorption rate is low at high pH, and the adsorption is more obvious at a longer holding time (i.e., 20 h). Carbon itself showed almost no NH₃ adsorption even for 20 h holding time. The NH₃ adsorption on Pd/Al₂O₃ and Pd/SiO₂ at neutral and basic pH solutions are in agreement with the acidic and amphoteric surface properties of SiO₂ and Al₂O₃ supports.

[0154] Furthermore, NH_3 -TPD experiments were conducted and confirmed the adsorption of ammonia on the catalysts, with key data summarized in Table 6. The normalized areas were defined as peak area per gram of catalyst. Although the peak area from TCD signal was not calibrated to quantify the amount of NH_3 , the values indicates the relative amount of desorbed NH_3 , which reduces in the order of 5 wt % Pd/SiO₂, Pd/Al₂O₃, and Pd/C. The order of NH_3 adsorption amount determined from NH_3 -TPD was well consistent with the results of the control experiments in solution. Therefore, conducting these control experiments of NH_3 adsorption are essential for reporting NH_3 concentration, because they can be lower than the real produced value. In the experiments, weak acid condition was used, under which nearly no NH_3 adsorption was observed. In addition, NH_3 concentration was quantified immediately after catalytic NO_2^- reduction reactions.

TABLE 6

NH ₃ -TPD Test Results						
	5 wt % Pd/SiO ₂		5 wt % Pd/Al ₂ O ₃		5 wt % Pd/C	
	Temperature at Maximum (° C.)	Normalized area	Temperature at Maximum (° C.)	Normalized area	Temperature at Maximum (° C.)	Normalized area
Total	109	4.56	140	2.53	106	1.47
	346	10.15	297	7.18	338	1.18
					740	6.69
		14.71		9.71		9.34

[0155] The possibility of NO_2^- adsorption on Pd-based catalysts was also examined. The NO_2^- concentration in 15 mL standard NO_2^- solution (blank, 52 μM) and 15 mL standard NO_2^- solution 50 mg various Pd catalysts were measured and quantified. As can be seen from FIG. 29 (key data summarized in Table 7, Pd/C showed strong NO_2^- “adsorption”, Pd/Al₂O₃ showed low NO_2^- “adsorption”, and Pd/SiO₂ showed nearly no NO_2^- “adsorption”. Table 8 further indicates that NO_2^- adsorption on Pd/C catalysts was dependent on NO_2^- concentration, a higher NO_2^- concentration can lead to higher “adsorption” of NO_2^- . Interestingly, carbon showed nearly no NO_2^- “adsorption”, suggesting it plays a trivial role on NO_2^- “adsorption”. The interaction between Pd and carbon may change the chemical state of Pd, which can adsorb or react with NO_2^- . The chemical state of Pd in 5% Pd/C catalyst was Pd²⁺, indicating Pd exists in PdO form. (5% Pd/Al₂O₃, 5% Pd/SiO₂, and 5% Pd/C before and after.) The NO_2^- reduction test results were not influenced by NO_2^- adsorption, because a concentrated 0.01 M NO_2^- was used as feedstock, and the adsorption on Pd/C was only 2% (FIG. 30 and Table 10).

TABLE 7

NO ₂ ⁻ Adsorption Control Test Results		
Reaction Condition	Tested Concentration (uM)	Adsorption percentage (%)
Blank (standard, 15 ml)	52	67.09
15 ml blank + 50 mg Pd/C	2	96
15 ml blank + 50 mg Pd/Al ₂ O ₃	49	6
15 ml blank + 50 mg Pd/SiO ₂	52	0

TABLE 8

NO ₂ ⁻ Adsorption Control Test Results				
NO ₂ ⁻ Concentration (uM)	Catalyst	Tested Concentration (uM)	Absorption Concentration (uM)	Absorption Percentage (%)
200	15 ml standard + 50 mg Pd/C	70	130	65.0
100	15 ml standard + 50 mg Pd/C	12	88	88.0
75	15 ml standard + 50 mg Pd/C	4	71	94.7
50	15 ml standard + 50 mg Pd/C	0.8	49.2	98.4
25	15 ml standard + 50 mg Pd/C	0	25	100.0
50	15 ml standard + 50 mg Carbon	48.3	1.7	3.4

TABLE 9

NO ₃ ⁻ Adsorption Control Test Results		
Reaction Condition	Tested Concentration (M)	Adsorption percentage (%)
Blank (standard, 15 ml)	0.01	base
15 ml blank + 50 mg Pd/C	0.098	2

[0156] Combining Electrocatalytic Reduction and Catalytic Reduction for Nitrate Removal

[0157] Finally, electrocatalytic NO₃⁻ reduction was combined using OD-Ag and catalytic NO₂⁻ reduction on Pd catalysts in one same H-type cell reactor to eliminate nitrate ions. 0.01 M NO₃⁻ (140 ppm N) was chosen as feedstock because it is in the typical NO₃⁻ concentration range of concentrated wastewater stream. The results (Table 10) showed that the final NO₃⁻ conversion can achieve >98% on OD-Ag electrode with 31.5 C charge passed at -1.1V vs Ag/AgCl, and the second catalytic process can efficiently eliminate NO₂⁻ with minimal NH₃ generation. After the two steps, NO₃⁻ concentration was reduced to 1.6-2.5 ppm (as N), no NO₂⁻, and 1.6-2.5 ppm (as N) NH₃ in the final treated solution. The NH₃ concentration showed the highest (2.5 ppm) by using Pd/C catalyst, and the lowest by using Pd/SiO₂ (1.6 ppm). By sacrificing the reaction rate of the first step, a decreased potential of -1.0V vs Ag/AgCl was used to fully convert NO₃⁻ to NO₂⁻, and Pd/C and Pd/SiO₂ were compared as the catalyst used in the second step. Finally, the lowest 1.1 ppm (as N) NH₃ and 5.88 ppm (as N) NO₃⁻ was achieved in the end by using Pd/SiO₂. These results are better than previously published work (Table 11), in electrocatalytic or catalytic reduction of NO₃⁻ (Martinez et al., "State-of-the-Art and Perspectives of the Catalytic and Electrocatalytic Reduction of Aqueous Nitrates," *Applied Catalysis B: Environmental* 207:42-59 (2017); Garcia-Segura et al., "Electrocatalytic Reduction of Nitrate: Fundamentals to Full-Scale Water Treatment Applications," *Applied Catalysis B: Environmental* 236:546-568 (2018), which are hereby incorporated by reference in their entirety), although NH₃ concentration (1.1 ppm as N) still needs to be further reduced to meet the limit of 0.66 ppm (as N) NH₃ (Table 12).

TABLE 10

Performances of Combined Electrocatalysis and Catalysis Process for Nitrate Reduction					
Start NO ₃ ⁻ concentration (ppm) ^a	voltage (V) ^b	Catalysts ^c	Final concentration (ppm) ^a		
			NH ₃	NO ₂ ⁻	NO ₃ ⁻
140	-1.1	Pd/Al ₂ O ₃	2.45	0	2.56
		Pd/C	2.43	0	1.66

TABLE 10-continued

Performances of Combined Electrocatalysis and Catalysis Process for Nitrate Reduction					
Start NO ₃ ⁻ concentration (ppm) ^a	voltage (V) ^b	Catalysts ^c	Final concentration (ppm) ^a		
			NH ₃	NO ₂ ⁻	NO ₃ ⁻
		Pd/SiO ₂	1.62	0	1.64
	-1.0	Pd/SiO ₂	1.09	0	5.88

^a Concentration ppm as N.

^b Electrocatalytic reduction on OD-Ag and potential vs Ag/AgCl.

^c Catalytic step catalysts. OD-Ag geometric area 6 cm², 31.5° C. charge passed, electrolyte volume 15 ml, stir rate 350 rpm. Catalytic process condition: different Pd-based catalysts 50 mg, same reaction cell continuously used after first step, CO₂ flow rate: 50 ml/min, room temperature and ambient pressure, stir rate 800 rpm.

TABLE 11

Summary of Electrocatalytic and Catalytic Reduction of Nitrate						
NO ₃ ⁻ Concentration (ppm)	Electrocatalytic/Catalytic	Catalysts	X (%)	S _{NH3} (%)	SN2 (%)	Ref.
700	Electrocatalytic	Cu	90	77.3	1	[a]
112	Electrocatalytic	Pd _{0.2} Sn _{0.8} /SS	100	24	34	[b]
112	Electrocatalytic	Blended Sn _{0.8} Pd _{0.2} /SS	100	14	81	[c]
700	Electrocatalytic	Sn	99	8	92	[d]
700	Electrocatalytic	Bi	N/A	3.8-19	58-65	[e]
50	Catalytic	PdIn	100	5	95	[f]
00	Catalytic	PdIn	82.2	25.6	74.4	[g]
360	Catalytic	PdCu	>90	3.4	93.5	[h]
30	Catalytic	PdSn	100	9	91	[i]
140	Combined	OD-Ag + Pd-based	98	1.2	98.8	This work

Ref. List: Each reference is hereby incorporated by reference in its entirety.

[a] Polatides & Kyriacou, "Electrochemical Reduction of Nitrate Ion on Various Cathode Reaction Kinetics on Bronze Cathode," *Journal of Applied Electrochemistry* 35: 421-127 (2005).

[b] Su et al., "Mode of Electrochemical Deposition on the Structure and Morphology of Bimetallic Electrodes and its Effect on Nitrate Reduction Toward Nitrogen Selectivity," *Applied Catalysis B: Environmental* 257 (2019).

[c] Katsouanos et al., "Efficient Electrochemical Reduction of Nitrate to Nitrogen on Tin Cathode at Very High Cathodic Potentials," *Electrochimica Acta* 52: 1329-1338 (2006).

[d] Dortsiou & Kyriacou, "Electrochemical Reduction of Nitrate on Bismuth Cathodes," *Journal of Electroanalytical Chemistry* 630: 69-74 (2009).

[e] Guo et al., "Insights into Nitrate Reduction over Indium-Decorated Palladium Nanoparticle Catalysts," *ACS Catalysis* 8: 503-515 (2017).

[f] Marchesini et al., "Study of the Interactions of Pd, In with SiO₂ and Al₂O₃ Mixed Supports as Catalysts for the Hydrogenation of Nitrates in Water," *Catalysis Communications* 21: 9-13 (2012).

[g] Constantinou et al., "Catalytic Removal of Nitrates from Waters," *Catalysis Today* 151: 190-194 (2010).

[h] Hamid et al., "Highly Reactive and Selective Sn—Pd Bimetallic Catalyst Supported by Nanocrystalline ZSM-5 for Aqueous Nitrate Reduction," *Applied Catalysis B: Environmental* 187: 37-46 (2016).

TABLE 12

Summary of Combined Electrocatalytic and Catalytic Nitrate Reduction Results										
Feed NO ₃ ⁻ (ppm)	Step 1 electrode	Voltage	Charge	Step 1		Step 2 catalyst	XNO ₃ -	SNH ₃	SN2	C _{NH3} (ppm)
				F _{NO2-}	F _{H2}					
140	OD-Ag	-1.1	31.5	83.2	4.9	Pd/Al ₂ O ₃	98.2	1.8	98.2	2.45
140	(6 cm ²)	-1.1	31.5	82.0	4.9	Pd/C	98.8	1.8	98.2	2.43
140		-1.1	31.5	85.6	4.2	Pd/SiO ₂	98.8	1.2	98.8	1.62
140		-1.0	31.5	82	2.1	Pd/SiO ₂	95.9	0.8	99.2	1.09

TABLE 12-continued

Summary of Combined Electrocatalytic and Catalytic Nitrate Reduction Results										
Feed NO ₃ ⁻ (ppm)	Step 1 electrode	Voltage	Charge	F _{NO2-}	F _{H2}	Step 2 catalyst	XNO3-	SNH3	SN2	C _{NH3} (ppm)
140		-1.0	29.5	84.6	2.3	Pd/C	90.9	1.5	98.5	1.8
70		-1.0	14.5	84	1.6	Pd/C	92.9	1.3	98.7	0.8

[0158] Conclusions

[0159] In conclusion, an OD-Ag electrode with over 12 times higher electrochemical surface area compared to commercial Ag foil was successfully prepared. Nitrate electrocatalytic reduction on OD-Ag was found to be controlled by electrode potential. Under the potential range of -0.9 V~-1.15 V (vs Ag/AgCl), electrocatalytic reduction of nitrate on OD-Ag can achieve high NO₂⁻ selectivity of >95% and low NH₃ selectivity of <0.4%. In one same cell, the OD-Ag has demonstrated superior nitrate reduction performance with 98% conversion and 95% selectivity to nitrite, and subsequent catalytic reduction of nitrite has achieved 100% conversion and over 99% selectivity to N₂. The detected nitrate and ammonium in the final solution after combining the two steps were only 5 ppm and 1.1 ppm, respectively, no nitrite was detected. These results were lower than previously reported work in catalytic and electrocatalytic reduction of nitrate.

Example 2—Nitrite Reduction by H₂ Directly
Generated from Water Electrolyzers Chemical and
Materials

[0160] 40 wt % Pt/C and IrO₂ were purchased from Premetek Co. Untreated carbon cloth and Teflon Gasket were ordered from Fuel Cell Store.

[0161] Electrode and Membrane Electrode Assembly (MEA) Fabrications

[0162] The MEA was assembled with a cathode electrode (Pt/C catalyst), a proton exchange membrane (PEM, Nafion 115), and an anode electrode (IrO₂ catalyst).

[0163] The cathode ink containing 80 wt % commercial 40 wt % Pt/C catalyst and 20% Nafion was sprayed on an untreated carbon cloth to obtain a catalyst loading of 1.15 mg_{Pt} cm⁻². The anode catalyst used the same method to achieve 3.75 mg cm⁻² IrO₂ loading. The sprayed catalysts were dried in air overnight. Then, anode, cathode, and Nafion 115 membrane were hot pressed at 130° C. and 1000 psi for 3 mins.

[0164] Proton Exchange Membrane (PEM) Water Electrolyzer Test

[0165] The MEA with an active catalyst area of 5 cm² was assembly to a sandwich structure. Cathode and anode were fed into 100% relative humidity (RH) vapor water (60 ml min⁻¹ high purity Argon) or liquid water (5.5 ml min⁻¹). Single cell temperature and humidified Argon temperature were 80° C.

[0166] Water Splitting Combined with Nitrite Reduction

[0167] The water electrolysis was controlled by a SP 300 potentiostat. Linear sweep voltammetry (LSV) and 10 cycles cyclic voltammetry (CV) were tested to obtain steady-state operation. Then, constant current (-1.4 A, -280 mA/cm²) was applied for PEM water splitting, and H₂ generated from the cathode was purged to a sealed nitrite

reduction cell for nitrite removal. CO₂ was also fed (2.5 ml min⁻¹) to the nitrate reduction cell during the nitrite reduction process.

Example 3—Nitrite Selectivity on Oxide-Derived
Silver in Electrocatalytic Nitrate Reduction

[0168] Chemical and Materials

[0169] All chemicals were used as received without purification. Silver foil (0.5 mm thick, 99.9985%), copper foil (0.5 mm thick, 99.9985%), platinum foil (0.025 mm thick, 99%), tin foil (0.025 mm thick, 99.9%), titanium foil (0.89 mm thick, 99.7%), zinc foil (0.1 mm thick, 99.994%), iron foil (0.5 mm thick, 99.99%), nickel foil (0.1 mm thick, 99.5%), palladium foil (0.025 mm thick, 99.9%), gold foil (0.05 mm thick, 99.95%), lead foil (0.76 mm thick, 99.8%), molybdenum foil (0.1 mm thick, 99.95%), tungsten foil (0.25 mm thick, 99.95%), aluminum foil (0.1 mm thick, 99.99%), cobalt foil (0.1 mm thick, 99.95%), zirconium foil (0.2 mm thick, 99.8%), vanadium foil (1.0 mm thick, 99.5%), and hydroxylamine hydrochloride (NH₂OH.HCl, 99%) were purchased from Alfa Aesar. Bismuth plate (>99.99%) was purchased from Amazon. Potassium nitrate (KNO₃, 99.7%), potassium chloride (KCl, 100%), potassium phosphate dibasic (K₂HPO₄, ≥98%), potassium phosphate monobasic (KH₂PO₄, ≥99%), sodium carbonate (Na₂CO₃, 100%), sodium chloride (NaCl, ≥99%), sodium sulfate (Na₂SO₄, ≥99%), sodium bicarbonate (NaHCO₃, 100%), hydrogen peroxide (H₂O₂, 30%), nitric acid (HNO₃, 70%), hydrochloric acid (HCl, 37%), phosphoric acid (H₃PO₄, ≥85%), and methanol (HPLC grade) were purchased from Fisher Chemical. Sodium salicylate (≥99.5%), sodium hydroxide (NaOH, ≥97%), potassium hydroxide (KOH, ≥85%), sodium nitroferricyanide dihydrate (Na₂[Fe(CN)₅NO].2H₂O, ≥99%), sodium hypochlorite solution (NaOCl, available chlorine 4.00-4.99%), N-(1-Naphthyl) ethylenediamine dihydrochloride (NED, ≥97%), sulfanilamide (≥99%), and palladium on active carbon (Pd/C, 5 wt. % Pd loading) were purchased from Sigma-Aldrich. Silver nanopowder (80-100 nm, 99.99%) was purchased from US Research Nanomaterials, Inc. Potassium nitrite (KNO₂, 97%), lead(II) nitrate (Pb(NO₃)₂, ≥99%), and n-Octylamine (>99%) were purchased from Acros Organic. 8-quinolinol was purchased from TCI. Ammonia standard solution (100 mg L⁻¹ as NH₃-N) was purchased from Hach. Silver standard solution (1,000 µg mL⁻¹ of Ag⁺ in 5% v/v nitric acid) was purchased from Inorganic Ventures. Plain carbon cloth, Vulcan XC-72R, PTFE gaskets, and Nafion 115 membrane were purchased from Fuel Cell Store. 40% Pt on Vulcan XC-72 (Pt/C) and IrO₂ powder were purchased from Premetek. Argon (Ar, Ultra High Purity, 99.999%), hydrogen (H₂, Ultra High Purity, 99.999%), and carbon dioxide (CO₂, industrial grade) were purchased from Airgas. H₂ calibration gases (10 ppm, 100 ppm, 1,000 ppm, 5,000 ppm, 10,000 ppm, balance helium) and N₂O calibration gases (95

ppm, 1,000 ppm, balance nitrogen) were purchased from Cal Gas Direct. Nitrogen (N₂) calibration gases (100 ppm, 1,000 ppm, 10,000 ppm, 100,000 ppm, balance helium) were purchased from Shop Cross. Nitrogen oxides detector tube (No. 175U, 1-60 ppm) was purchased from Kitagawa America. Deionized (DI) water (18.2 MΩ cm, Barnstead™ E-Pure™) was used for app parts of this example.

[0170] Preparation of Working Electrodes

[0171] Oxide-derived silver (OD-Ag) was prepared in a standard three-electrode system by a modified square wave voltammetric (SWV) method according to Ma et al., “Selective and Efficient Reduction of Carbon Dioxide to Carbon Monoxide on Oxide-Derived Nanostructured Silver Electrocatalysts,” *Angew. Chem. Int. Ed.* 55:9748-9752 (2016), which is hereby incorporated by reference in its entirety). A polycrystalline silver foil, a silver/silver chloride (Ag/AgCl) electrode (saturated KCl, E⁰=0.197 V vs. SHE, Pine Research), and a platinum foil were used as the working electrode, reference electrode, and counter electrode, respectively. 0.2 M NaOH was used as the electrolyte. To synthesize OD-AgO_x, symmetric square-wave pulse potential from 0 to 1 V_{Ag/AgCl} was applied by a Biologic SP-300 potentiostat/galvanostat on the Ag foil at a frequency of 500 Hz for 3 h (video S1, with a 16× play rare). Then, a constant potential (-1.30 V_{Ag/AgCl}) was applied for 10 min to reduce OD-AgO_x to OD-Ag.

[0172] The electrode with Ag nanoparticles on Ag foil (Ag NPs/Ag) was prepared by airbrushing a 2-propanol dispersion of Ag NPs (10 mg mL⁻¹) and Nafion on both sides of the Ag foil. The mass ratio of Ag NPs and Nafion was 4:1. The catalyst loading was controlled at 1.5 mg_{Ag} cm⁻².

[0173] Materials Characterization

[0174] Physical Characterization

[0175] X-ray diffraction (XRD) crystallography was carried out on a Siemens D500 X-ray diffractometer with a Cu Kα source (λ=1.5418 Å) at a tube voltage of 45 kV and a tube current of 30 mA. The scan was performed at a rate of 10° min⁻¹ and a step size of 0.01°. X-ray photoelectron spectroscopy (XPS) was carried out on a Kratos Amicus/ESCA 3400 X-ray photoelectron spectrometer with Mg Kα X-ray (1,253.7 eV). All spectra were calibrated with the C 1s peak at 284.8 eV. Scanning electron microscopy (SEM) was performed on a FEI Quanta-250 field-emission scanning electron microscope. Inductively coupled plasma-optical emission spectroscopy (ICP-OES) was performed on a PerkinElmer® Optima™ 8000 ICP-OES instrument. The calibration in the range of 0.6-100 ppb was established by diluting the standard Ag⁺ solution (1,000 μg mL⁻¹) with 5% v/v nitric acid.

[0176] Determination of the Electrochemical Active Surface Area (ECSA)

[0177] The ECSA of the Ag electrodes (OD-Ag, Ag foil, and Ag NPs/Ag) was measured by underpotential deposition (UPD) of Pb (Kim et al., “Achieving Selective and Efficient Electrocatalytic Activity for CO₂ Reduction Using Immobilized Silver Nanoparticles,” *J. Am. Chem. Soc.* 137:13844-13850 (2015), which is hereby incorporated by reference in its entirety). Cyclic voltammetry (CV) was conducted in a three-electrode system with an electrolyte consisting of 5 mM Pb(NO₃)₂, 10 mM HNO₃, and 10 mM KCl between -0.10 and -0.48 V_{Ag/AgCl} with a scan rate of 10 mV s⁻¹. The peak for monolayer UPD of Pb was used for ECSA calculation, which corresponds to a charge of 1.67×10⁻³ cm² μC⁻¹.

[0178] Determination of the Active Surface Area of Pd

[0179] The active surface area of Pd for Pd/C was measured by H₂ pulse chemisorption on an AutoChem II 2920 chemisorption analyzer. The catalyst was first reduced at 200° C. (10° C. min⁻¹ ramp rate) under a flow of 10% H₂/Ar (50 mL min⁻¹) for 1 h. Then, a 1-hour purging step was carried out with Ar (20 mL min⁻¹) at 200° C. before the catalyst was cooled to 35° C. After the baseline signal from the thermal conductivity detector was stable, a series of pulse streams of 10% H₂-Ar was injected until the injected gas volume emerged from the sample tube was unchanged and the detected peak integral was constant. The stoichiometric factor for H₂ adsorption was assumed to be 2 (one H₂ molecule for two Pd atoms) (Prelazzi et al., “Comparison of H₂ Adsorption, O₂ Adsorption, H₂ Titration, and O₂ Titration on Supported Palladium Catalysts,” *J. Catal.* 181:73-79 (1999), which is hereby incorporated by reference in its entirety).

[0180] Electrocatalytic and Catalytic Activity Measurements

[0181] Electrochemical Measurements

[0182] Linear sweep voltammetry (LSV) measurements were carried out in a single-compartment cell with a three-electrode configuration without stirring. The electrolyte consisted of 0.1 M KCl, and its pH was adjusted to 4 by adding hydrochloric acid. The scan rate was 5 mV s⁻¹.

[0183] The electrochemical reduction of NO₃⁻ (NO₃RR) was performed by chronoamperometry (CA) at room temperature in a dual-chamber H-type cell with a three-electrode configuration, and the cathode chamber was airtight. Each chamber contained 15 mL of the electrolyte (0.1 M KCl, pH=4) and the two chambers were separated by a Nafion 115 membrane (K⁺ form). KNO₃ was added to the catholyte, which was magnetically stirred at 350 r.p.m. by a PTFE-coated stir bar (20×6 mm). The geometric area of the working electrode was chosen depending on the experimental conditions, typically 2, 4, or 6 cm². Specifically, at low overpotentials and NO₃⁻ concentration such as -1.00 and -1.10 V_{Ag/AgCl} with 0.01 M NO₃⁻, a 6 cm²-electrode was used to ensure the reaction was complete in a few hours. At high overpotentials or NO₃⁻ concentration, smaller electrodes were used to avoid overload of the potentiostat. A graphite rod was used as the counter electrode. All electrode potentials were measured against the Ag/AgCl reference electrode (saturated KCl) with 85% IR-compensation. Ar was fed into the catholyte at a flow rate of 12.5 mL min⁻¹. The outlet gas from the cathode chamber was bubbled into an external trapping solution containing 25 mL of 0.1 M KCl (pH=3) to absorb any NH₃ that evolved from the system. The gas flow was then introduced to the on-line gas chromatography (GC) to quantify H₂. The duration of CA was chosen depending on the total applied charge, as detailed in the Brief Description of the Drawings. The current density was calculated based on the geometric area (for both sides) of the electrode. The entire experimental setup is shown in FIG. 11.

[0184] The conversion of NO₃⁻ (X, previously referred to as “C”) and selectivity to product i (S_i, i=NH₄⁺, NO₂⁻, or NH₂OH) were calculated by Eq. 3 and Eq. 4:

$$X = \frac{n_0 - n}{n_0} \times 100\% \quad (\text{Eq. 3})$$

-continued

$$S_i = \frac{n_i}{n_0 - n} \times 100\% \quad (\text{Eq. 4})$$

where n_0 is the initial amount of NO_3^- (mol); n is the amount of NO_3^- after electrolysis (mol); n_i is the amount of product i (mol).

[0185] The faradaic efficiency of product i (FE_i) was calculated by Eq. 5:

$$FE_i = \frac{n_i z_i F}{Q} \times 100\% \quad (\text{Eq. 5})$$

where z_i is the number of electrons transferred to product i ; F is the Faraday constant ($96,485 \text{ C mol}^{-1}$); Q is the total charge passed through the electrolytic cell (C).

[0186] Isotopic Experiment and Kinetics Modeling

[0187] The isotopic experiment was conducted in 0.1 M KCl (pH=4) with 0.025 M K^{15}NO_3 and 0.025 M K^{14}NO_2 . CA was carried out with different applied charges. The N-species in the resulting solution were quantified by HPLC (for $^{15}\text{NO}_3^-$), colorimetry (for total $^{14}\text{NO}_2^-$ and $^{15}\text{NO}_2^-$), and NMR ($^{14}\text{NH}_4^+$ and $^{15}\text{NH}_4^+$), as detailed in 6.1 and 6.7.

[0188] The following reactions in the electrolytic cell were considered:



[0189] All reactions were assumed to be first-order (Katsounaros et al., "Efficient Electrochemical Reduction of Nitrate to Nitrogen on Tin Cathode at Very High Cathodic Potentials," *Electrochim. Acta* 52:1329-1338 (2006); Katsounaros et al., "Reaction Pathways in the Electrochemical Reduction of Nitrate on Tin," *Electrochim. Acta* 71:270-276 (2012), which are hereby incorporated by reference in their entirety) without isotopic effect ($k_2=k_4$). In addition, 100% ^{15}N and ^{14}N balances were assumed, in light of the ~100% nitrogen balance for the electro-reduction of NO_3^- and NO_2^- , and the low selectivity towards NO_2 , NO , N_2O , and NH_2OH (FIG. 31D and Table 13).

TABLE 13

Content of Gaseous Products (NO_2 , NO , and N_2O) for the Electro-Reduction of NO_3^- or NO_2^- on OD-Ag. The Electrolyte was 0.1M KCl and the Applied Potential was $-1.50 \text{ V}_{\text{Ag}/\text{AgCl}}$						
Entry	Reactants	Ar flow rate (mL min ⁻¹)	Reaction time (min)	Product detected	Content (ppm)	Charge (C)
1	0.05M NO_3^-	12.5	4	Total NO + NO_2	3.0	25.4
2	0.025M $\text{NO}_3^- + 0.025\text{M NO}_2^-$	20	35	N_2O	32.6	190.7

TABLE 13-continued

Content of Gaseous Products (NO_2 , NO , and N_2O) for the Electro-Reduction of NO_3^- or NO_2^- on OD-Ag. The Electrolyte was 0.1M KCl and the Applied Potential was $-1.50 \text{ V}_{\text{Ag}/\text{AgCl}}$						
Entry	Reactants	Ar flow rate (mL min ⁻¹)	Reaction time (min)	Product detected	Content (ppm)	Charge (C)
3	0.025M $\text{NO}_3^- + 0.025\text{M NO}_2^-$	12.5	4	Total NO + NO_2	2.4	21.2

Note:
Estimation of FE of N_2O based on Entry 2.

$$n_{\text{N}_2\text{O}} = 20 \text{ mL min}^{-1} \times 35 \text{ min} \times 32.6 \times 10^{-6} \times 0.0416 \text{ mol L}^{-1} / 1000 = 9.49 \times 10^{-7} (\text{mol})$$

Assuming all N_2O was reduced from NO_3^- (NO_2^-), the upper (lower) limit of FE is

$$FE_{\text{N}_2\text{O}, \text{max}} = \frac{9.49 \times 10^{-7} \text{ mol} \times 4 \times 96485 \text{ C mol}^{-1}}{190.7 \text{ C}} \times 100\% = 0.19\%$$

$$FE_{\text{N}_2\text{O}, \text{min}} = \frac{9.49 \times 10^{-7} \text{ mol} \times 2 \times 96485 \text{ C mol}^{-1}}{190.7 \text{ C}} \times 100\% = 0.096\%$$

Similarly, results in the above table show a negligible contribution of NO_2 and NO ($\leq 0.007\%$) to the total FE in the system.

[0190] Let $A=^{15}\text{NO}_3^-$, $B=^{15}\text{NO}_2^-$, $C=^{15}\text{NH}_4^+$, $b=^{14}\text{NO}_2^-$, and $c=^{14}\text{NH}_4^+$. The following 5 equations can be obtained by rate law:

$$\frac{d[A]}{dt} = -k_1[A] - k_3[A] \quad (\text{Eq. 7})$$

$$\frac{d[B]}{dt} = -k_1[A] - k_2[B] \quad (\text{Eq. 8})$$

$$\frac{d[C]}{dt} = k_3[A] + k_2[B] \quad (\text{Eq. 9})$$

$$\frac{d[b]}{dt} = -k_2[b] \quad (\text{Eq. 10})$$

$$\frac{d[c]}{dt} = k_2[b] \quad (\text{Eq. 11})$$

By using the boundary conditions ($[X]=[X]_0$ for all species at $t=0$) and N balance ($[A]+[B]+[C]=[A]_0+[B]_0+[C]_0$), the solutions for $[A]$, $[b]$, and $[B]$ are:

$$[A] = [A]_0 e^{-(k_1+k_2)t} \quad (\text{Eq. 12})$$

$$[b] = [b]_0 e^{-k_2 t} \quad (\text{Eq. 13})$$

$$[B] = \frac{k_1[A]_0}{k_2 - k_1 - k_3} [e^{-(k_1+k_3)t} - e^{-k_2 t}] = f(t)k_1 \quad (\text{Eq. 14})$$

Therefore, k_2 and (k_1+k_3) were calculated by linear regression of $\ln([b]/[b]_0)$ and $\ln([A]/[A]_0)$ on t ; k_1 was calculated by linear regression of $[B]$ on

$$f(t) = \frac{[A]_0}{k_2 - k_1 - k_3} [e^{-(k_1+k_3)t} - e^{-k_2t}].$$

The fitted curves and calculated rate constants are summarized in FIGS. 32A-32G.

[0191] Catalytic Reduction of NO_2^-

[0192] Catalytic reduction of NO_2^- was carried out at room temperature in a gastight reactor. Specifically, 50 mg of Pd/C was suspended in 15 mL of the NO_2^- -containing solution which was magnetically stirred at 800 r.p.m. The solution was sparged with CO_2 at 25 mL min^{-1} by a gas dispersion tube (Ace Glass, 7 mm O.D., 25-50 micron porosity) during the test to maintain the CO_2 -buffered condition (Martinez et al., "State-of-the-Art and Perspectives of the Catalytic and Electrocatalytic Reduction of Aqueous Nitrates," *Appl. Catal. B* 207:42-59 (2017), which is hereby incorporated by reference in its entirety). After the solution was saturated with CO_2 (pH~7), H_2 was fed at 25 mL min^{-1} via another gas dispersion tube. During the measurement, the solution was sampled periodically from the reactor, followed by dilution and filtration for product analysis.

[0193] The observed reaction rate constant k_{obs} (min^{-1}) was calculated assuming pseudo-first-order dependence on NO_2^- concentration (H_2 is in excess) by (Eq. 15)

$$\frac{dc}{dt} = -k_{obs}c \quad (\text{Eq. 15})$$

where c is the concentration of NO_2^- (mg L^{-1}) and t is the reaction time (min) (Clark et al., "Mechanistic Insights into pH-Controlled Nitrite Reduction to Ammonia and Hydrazine over Rhodium," *ACS Catal.* 10:494-509 (2019), which is hereby incorporated by reference in its entirety). The rate constant was normalized to the concentration of surface Pd in the solution by (Eq. 16)

$$k = \frac{k_{obs}}{\frac{AmM}{aN_A V}} \quad (\text{Eq. 16})$$

where A is the active surface area of Pd ($\text{m}^2 \text{ g}^{-1}$), m is the mass of Pd in the reactor (0.050 g), M is the molar mass of Pd ($106.42 \text{ g Pd mol}^{-1}$), a is the cross-sectional area of one Pd atom ($7.87 \times 10^{-20} \text{ m}^2$), N_A is the Avogadro constant ($6.02 \times 10^{23} \text{ mol}^{-1}$), V is the volume of the NO_2^- -containing solution (0.015 L). The unit of the normalized k calculated from the above equation is $\text{L g Pd}^{-1} \text{ min}^{-1}$.

[0194] Combined Process for Agricultural Wastewater Denitrification

[0195] The combined denitrification process was carried out in three media: (1) 0.1 M KCl; (2) simulated waste stream from ion-exchange columns (containing 400 mg L^{-1} of NaCl, 400 mg L^{-1} of Na_2SO_4 , and $8,000 \text{ mg L}^{-1}$ of NaHCO_3 in DI water) (Paidar et al., "Electrochemical Removal of Nitrate Ions in Waste Solutions After Regeneration of Ion Exchange Columns," *J. Appl. Electrochem.*

29:611-617 (1999), which is hereby incorporated by reference in its entirety); and (3) real agricultural wastewater obtained from Des Moines Water Works, Iowa (filtered to remove the insoluble matters). Additional KNO_3 was added to set the concentration of NO_3^- at 0.01 M (corresponding to 140 ppm-N) to simulate the NO_3^- content enriched in waste streams. The two-step denitrification treatment was performed as described in 4.1 (for NO_3^- to NO_2^-) and 4.3 (for NO_2^- to N_2).

[0196] A proton-exchange membrane (PEM)-based water electrolyzer was utilized to generate on-site H_2 for the second step (catalytic reduction of NO_2^-) (FIGS. 33A-33B). The membrane electrode assembly (MEA) included a Pt/C cathode, IrO_2 anode, and a Nafion 115 membrane (H^+ form). The electrodes were prepared by spraying the dispersion containing the catalyst and Nafion ionomer (4:1 in mass) onto plain carbon cloths. The catalyst loading was 1.15 mg cm^{-2} (in Pt) for the cathode and 3.75 mg cm^{-2} (in IrO_2) for the anode. The MEA was hot-pressed at 130° C. and 1,000 psi for 3 min before assembled into the cell hardware containing two PTFE gaskets and two graphite end plates with serpentine flow channels. The active area of the electrodes was 5 cm^2 . The cell was operated at 80° C. with DI water supplied in both cathode and anode chambers at a flow rate of 5.5 mL min^{-1} by a peristaltic pump. Repeated CV scans were carried out between 0 and 1.6 V until a stable CV curve was obtained. Constant-current electrolysis was then performed at 1.4 Å, and the generated H_2 from the cathode compartment was directly sparged in the NO_2^- -containing solution.

[0197] Computational Methods

[0198] The Vienna ab initio Simulation Package (VASP) was used for density functional theory (DFT) calculations (Kresse & Furthmuller, "Efficient Iterative Schemes for Ab Initio Total-Energy Calculations Using a Plane-Wave Basis Set," *Phys. Rev. B* 54:11169-11186 (1996); Kresse & Furthmuller, "Efficiency of Ab-Initio Total Energy Calculations for Metals and Semiconductors Using a Plane-Wave Basis Set," *Comput. Mater. Sci.* 6:15-50 (1996), which are hereby incorporated by reference in their entirety). Projector augmented-wave (PAW) potentials were implemented to describe electron-ion interactions (P. E. Blöchl, "Projector Augmented-Wave Method," *Phys. Rev. B* 50:17953-17979 (1994); Kresse & Joubert, "From Ultrasoft Pseudopotentials to the Projector Augmented-Wave Method," *Phys. Rev. B* 59:1758-1775 (1999), which are hereby incorporated by reference in their entirety), and the Perdew-Wang functional was used within the generalized gradient approximation (GGA-PW91) to determine exchange-correlation energies (Perdew & Wang, "Accurate and Simple Analytic Representation of the Electron-Gas Correlation Energy," *Phys. Rev. B* 45:13244-13249 (1992), which is hereby incorporated by reference in its entirety). Electronic energies were calculated to a precision of 10^{-4} eV , using a kinetic energy cutoff of 400 eV. Geometry optimizations were performed until the forces on all atoms were less than 0.02 eV \AA^{-1} . Optimized lattice constants were calculated as follows (experimental values in parentheses, all values in Å): Ag 4.16 (4.09), Cu 3.64 (3.61), and Pd 3.96 (3.89) (Haynes et al., *CRC Handbook of Chemistry and Physics*, Ed.: W. M. Haynes, CRC (2016), which is hereby incorporated by reference in its entirety).

[0199] The values reported in reference to the Ag/AgCl electrode were calculated by shifting the potential vs. RHE

(the typical reference for the computational hydrogen electrode) according to the difference in standard reduction potentials. Potentials (E) versus Ag/AgCl in saturated KCl relative to those calculated vs. RHE were therefore calculated using Eq. 17:

$$E_{\text{Ag/AgCl}} = E_{\text{RHE}} - 0.197 \text{ V} - 0.059 \text{ V} \times \text{pH} \quad (\text{Eq. 17})$$

[0200] Quantification Methods

[0201] Quantification of NO_3^- and NO_2^-

[0202] NO_3^- and NO_2^- were analyzed by High-Performance Liquid Chromatography (HPLC) (Chou et al., "A High Performance Liquid Chromatography Method for Determining Nitrate and Nitrite Levels in Vegetables," *J. Food Drug Anal.* 11:233-238 (2003); Chou et al., "A High Performance Liquid Chromatography Method for Determining Nitrate and Nitrite Levels in Vegetables," *Journal of Food and Drug Analysis* 11:233-238 (2003), which is hereby incorporated by reference in its entirety) (Agilent Technologies, 1260 Infinity II LC System) equipped with a variable wavelength detector (Agilent 1260 Infinity Variable Wavelength Detector VL). The wavelength of 213 nm was used for detection. A C18 HPLC column (Gemini® 3 μm , 110 \AA , 100 \times 3 mm) was used for analysis at 25° C. with a binary gradient pumping method to drive mobile phase at 0.4 mL min^{-1} . The mobile phase consisted of 0.01 M n-Octylamine in a mixed solution containing 30 vol % of methanol and 70 vol % of DI water, and the pH of the mobile phase was adjusted to 7.0 with H_3PO_4 . The running time was 30 min for each sample, and the retention time for NO_3^- and NO_2^- was around 18 and 16 min, respectively. The calibration solutions for NO_3^- or NO_2^- were prepared with KNO_3 and KNO_2 in the concentration range of 0.0625-2 mM (FIGS. 34A-34B).

[0203] NO_2^- at lower concentrations was determined by colorimetry based on the Griess reaction. Two reagents were prepared and stored at 4° C., including (a) solution A, containing 10 mg mL^{-1} of sulfanilamide and 1.2 M HCl; and (b) solution B, containing 1.0 mg mL^{-1} of N-(1-Naphthyl) ethylenediamine dihydrochloride (NED). Specifically, the coloring reagent was prepared by mixing equal volumes of solution A and B. 0.6 mL of the coloring reagent was then mixed with 4 mL of the neutralized sample solution at room temperature. The absorbance measurement was performed on a UV-Vis spectrophotometer (Shimadzu UV-2700) at a wavelength of 540 nm after 15 min of color development. The calibration curve (FIGS. 35A-35F) was established by testing a series of standard NO_2^- solutions in the concentration range of 2.7-65.2 μM .

[0204] Quantification of H_2 and N_2

[0205] The produced H_2 and N_2 from the reactor were analyzed by an on-line GC (SRI Instruments, 8610C, Multiple Gas #3) equipped with HayeSep D and MolSieve 5 \AA columns. A thermal conductivity detector was used to detect H_2 and N_2 . The calibration curves for H_2 (10-10,000 ppm) and N_2 (100-100,000 ppm) were established by analyzing the calibration gases.

[0206] To quantify the generated H_2 during the NO3RR measurements, the GC program was started at 2 min after NO3RR was initiated. A 12.5-min programmed cycle was repeated, including 8 min of the GC running period and 4.5 min of the cooling period. For each cycle, the rate of H_2 generation (r, mol s^{-1}) was calculated using Eq. 18

$$r = c \times 10^{-6} \times \frac{pV \times 10^{-6} \div 60}{RT} \quad (\text{Eq. 18})$$

where c is the H_2 content (ppm); V is the volumetric flow rate of the inlet gas (12.5 mL min^{-1}); p is the atmospheric pressure ($p=1.013 \times 10^5$ Pa); R is the gas constant ($R=8.314$ J mol^{-1} K^{-1}); T is the room temperature (293.15 K). The total amount of H_2 production (mol) was calculated by integrating the plot of H_2 production rate (mol s^{-1}) vs. reaction time (s) with polynomial curve fitting.



[0207] The composition of the gaseous product of catalytic NO_2 reduction using on-line GC was also examined. The experiment was carried out as described in the catalytic reduction of NO_2 discussion supra with a lower feeding rate of H_2 (14.5 mL min^{-1}) and CO_2 (2.5 mL min^{-1}), and a higher NO_2^- concentration (0.5 M) to ensure the signal of N_2 was detectable by GC. The total reaction time was 2 h. To quantify the generated N_2 , the GC program was started at 5 min after the catalytic reduction was initiated. An 8-min programmed cycle was repeated, including 6 min of the GC running period and 2 min of the cooling period. 15 GC runs were performed in total during the reaction. The consumption of feeding gases (H_2 and CO_2) and generation of N_2 during the reduction of NO_2^- was considered ($2\text{NO}_2^- + 3\text{H}_2 + 2\text{CO}_2 \rightarrow \text{N}_2 + 2\text{HCO}_3^- + 2\text{H}_2\text{O}$), which results in a non-negligible decrease in the flow rate of the gas mixture. The net consumption rate of gas (mL min^{-1}) was calculated by Eq. 19:

$$\text{Net consumption rate} = \frac{3+2-1}{2} \times (n_0 - n) \times \frac{RT}{p} \times 10^6 \div \frac{t}{60} \quad (\text{Eq. 19})$$

where n_0 is the initial amount of NO_2^- (mol); n is the amount of NO_2^- after the reaction (mol); t is the reaction time (s). The calibrated flow rate of the GC inlet gas (\dot{V}) was then obtained by subtracting the net consumption rate from the total feeding rate of H_2 and CO_2 into the reactor. Other steps for calculating the N_2 production were the same as for H_2 .

[0208] Quantification of NO_2 and NO

[0209] The total concentration of NO_2 and NO in the outlet gas of the reactor was tested by nitrogen oxide detector tubes (Kitagawa America, No. 175U) with a measuring range of 1-60 ppm. Gas was sampled by an aspirating pump (Kitagawa America, AP-20), and the content of total NO_2 and NO was obtained by reading the scale of the maximum point of the purple stained layer, where the colorimetric reaction occurs in the presence of NO_2 or NO:



[0210] Quantification of N_2O

[0211] The concentration of N_2O in the outlet gas of the reactor was analyzed by an off-line GC equipped with an electron capture detector. The calibration curve of N_2O was established by testing the standard gases in the range of 0.1-300 ppm. The outlet gas from the reactor was collected in sample bags (FlexFoil PLUS, SKC, Inc) and injected into GC for analysis.

[0212] Quantification of NH_4^+

[0213] NH_4^+ was quantified by indophenol blue colorimetry (Chen et al., “Revealing Nitrogen-Containing Species in Commercial Catalysts Used for Ammonia Electrosynthesis.” *Nature Catalysis* 3:1055-1061 (2020); Kim et al., “Lithium-Mediated Ammonia Synthesis from Water and Nitrogen: A Membrane-Free Approach Enabled by an Immiscible Aqueous/Organic Hybrid Electrolyte System,” *Green Chem.* 21:3839-3845 (2019), which are hereby incorporated by reference in their entirety). Three reagents were prepared, including (a) coloring solution, containing 0.4 M sodium salicylate and 0.32 M NaOH; (b) oxidizing solution, containing 0.75 M NaOH in NaClO solution (available chlorine: 4.00-4.99%); and (c) catalyst solution, containing 10 mg mL⁻¹ of $\text{Na}_2[\text{Fe}(\text{CN})_5\text{NO}]\cdot 2\text{H}_2\text{O}$. Specifically, 50 μL of the oxidizing solution, 500 μL of the coloring solution, and 50 μL of the catalyst solution were added sequentially into 4 mL of the testing sample, followed by ultrasonication for 10 s to mix the reagents. The absorbance measurement was performed on a UV-Vis spectrophotometer (Shimadzu UV-2700) at a wavelength of 665 nm after 2 h of color development. The calibration curves (FIGS. 35A-35F) were established by examining a series of standard NH_4^+ solutions in the concentration range of 5-300 μM . It should be noted that NH_4^+ quantification by colorimetry is pH-sensitive. Therefore, multiple calibration curves were prepared according to the specific composition of the sample solutions. For the CO_2 -saturated solutions, the pH was adjusted to 13 by adding KOH before the colorimetric test.

[0214] Quantification of NH_2OH

[0215] NH_2OH was determined by a colorimetric method (Frear & Burrell, “Spectrophotometric Method for Determining Hydroxylamine Reductase Activity in Higher Plants,” *Anal. Chem.* 27:1664-1665 (1955), which is hereby incorporated by reference in its entirety). 1 mL of the sample solution, 1 mL of 0.05 M phosphate buffer solution (pH=6.8), 0.8 mL of DI water, 0.2 mL of trichloroacetic acid, 1 mL of 8-quinolinol, and 1 mL of 1 M Na_2CO_3 solution were mixed and placed in a boiling water bath for 1 min for color development. The solution was then removed from the water bath and cooled at room temperature for 15 min. The absorbance was measured at 705 nm on a UV-Vis spectrophotometer. The calibration curve (FIGS. 35A-35F) was established by testing a series of NH_2OH solutions in the concentration range of 6-40 μM .

[0216] Quantification of $^{14}\text{NH}_4^+$ and $^{15}\text{NH}_4^+$

[0217] $^{14}\text{NH}_4^+$ and $^{15}\text{NH}_4^+$ were quantified by ^1H nuclear magnetic resonance (NMR) spectroscopy obtained on a Bruker Avance III 600 Spectrometer. Samples were prepared by properly diluting the electrolyte with a solution containing 0.1 M H_2SO_4 and 0.1 M KCl, and then mixing 0.8 mL of the diluted solution with 0.2 mL of DMSO- d_6 . Calibration curves were established by testing a series of solutions containing $^{14}\text{NH}_4^+$ and $^{15}\text{NH}_4^+$ in 0.1 M H_2SO_4 and 0.1 M KCl with concentrations ranging from 5 to 80 μM (FIGS. 36A-36B). The scan number was 2,048. Water suppression was performed for all NMR measurements.

[0218] Results and Discussion

[0219] Strong Electrocatalytic Preference on Ag for NO_3^- -to- NO_2^- Reaction

[0220] Owing to the higher reactivity of NO_2^- than the stable NO_3^- , it is generally easier to electrochemically reduce NO_2^- on most metal surfaces. Indeed, as observed in linear sweep voltammetry (LSV), 15 of 18 commonly used

metal foils possessed a more negative onset potential for the NO_3^- reduction reaction (NO3RR) than for the NO_2^- reduction reaction (NO2RR), rendering the onset-potential difference (i.e., “ $E_{\text{onset}}(\text{NO3RR})-E_{\text{onset}}(\text{NO2RR})$ ”) negative: gradually from -160 to -10 mV on Ti, Pt, Zr, Fe, Ni, Pd, Au, V, Mo, Bi, Co, Zn, Sn, Al, and W, respectively (FIG. 37A and Table 14). Note that the onset potential was consistently defined as the potential under which -0.75 mA cm^{-2} was reached in LSV for NO3RR, NO2RR, and HER (hydrogen evolution reaction) in this work. Clearly, those metal surfaces prefer the NO2RR to the NO3RR under the same test conditions. No preference between NO3RR and NO2RR was observed on Pb foil: the onset potential of the NO3RR was precisely the same as that of the NO2RR (-1.60 $\text{V}_{\text{Ag}/\text{AgCl}}$, $\text{V}_{\text{Ag}/\text{AgCl}}$: V vs. Ag/AgCl , hereinafter).

TABLE 14

Summary of Onset Potentials ($\text{V}_{\text{Ag}/\text{AgCl}}$ Defined as the Potential in which the Current Density Attained -0.75 mA cm^{-2}) and Onset Potential Difference on Different Electrodes. The Linear Sweep Voltammograms are Shown in FIGS. 38A-38P and FIGS. 37B-37C

Electrode	E_{NO3RR} ($\text{V}_{\text{Ag}/\text{AgCl}}$)	E_{NO2RR} ($\text{V}_{\text{Ag}/\text{AgCl}}$)	E_{HER} ($\text{V}_{\text{Ag}/\text{AgCl}}$)	$E_{\text{NO3RR}} - E_{\text{NO2RR}}$ (mV)	$E_{\text{NO3RR}} - E_{\text{HER}}$ (mV)
Ti	-1.37	-1.21	-1.51	-160	140
Pt	-0.91	-0.76	-0.90	-150	-10
Zr	-1.56	-1.41	-1.65	-150	90
Fe	-1.08	-0.94	-1.14	-140	60
Ni	-0.95	-0.81	-1.11	-140	160
Pd	-1.07	-1.00	-1.10	-70	30
Au	-1.26	-1.21	-1.33	-50	70
V	-1.30	-1.25	-1.40	-50	100
Mo	-1.23	-1.19	-1.21	-40	-20
Bi	-1.42	-1.38	-1.52	-40	100
Co	-0.84	-0.80	-1.21	-40	370
Zn	-1.33	-1.30	-1.61	-30	280
Sn	-1.68	-1.66	-1.64	-20	-40
Al	-1.98	-1.96	-1.91	-20	-70
W	-1.24	-1.23	-1.27	-10	30
Pb	-1.60	-1.60	-1.71	0	110
Cu	-0.94	-0.99	-1.35	50	410
Ag	-1.00	-1.41	-1.53	410	530

[0221] Cu and Ag are the only two metal surfaces that showed the distinctive preference for NO3RR over NO2RR: the “ $E_{\text{onset}}(\text{NO3RR})-E_{\text{onset}}(\text{NO2RR})$ ” is positive. Specifically, the onset potentials of the NO3RR in LSV are very close to each other: $-1.00 \text{ V}_{\text{Ag}/\text{AgCl}}$ and $-0.94 \text{ V}_{\text{Ag}/\text{AgCl}}$ on Ag and Cu, respectively (FIGS. 37B-37C). Importantly, the onset potential of the NO2RR is far more negative on Ag than on Cu ($-1.41 \text{ V}_{\text{Ag}/\text{AgCl}}$ vs. $-0.99 \text{ V}_{\text{Ag}/\text{AgCl}}$), substantiating the higher energy barrier of NO_2^- reduction on the Ag surface. As a result, the potential window between NO3RR and NO2RR onsets is significantly wider on Ag than on Cu (410 mV vs. 50 mV). In addition, Ag holds 180 mV more negative onset potential for HER than Cu ($-1.53 \text{ V}_{\text{Ag}/\text{AgCl}}$ vs. $-1.35 \text{ V}_{\text{Ag}/\text{AgCl}}$), and the “ $E_{\text{onset}}(\text{NO3RR})-E_{\text{onset}}(\text{HER})$ ” is 530 mV (Ag) vs. 410 mV (Cu). The strong preference for the NO3RR over the NO2RR and HER could be particularly beneficial for selectively converting NO_3^- to NO_2^- , as the produced NO_2^- (from NO_3^- reduction) may be preserved as the final product on the electrode.

[0222] Highly Selective NO_3^- -to- NO_2^- Pathway on OD-Ag with Enhanced Activity

[0223] In order to significantly enhance NO3RR activity, oxide-derived Ag (OD-Ag) electrocatalysts were directly

prepared from Ag foil by performing square wave voltammetry (SWV) and then conducting CA under a constant negative potential (Ma et al., "Selective and Efficient Reduction of Carbon Dioxide to Carbon Monoxide on Oxide-Derived Nanostructured Silver Electrocatalysts," *Angew. Chem. Int. Ed.* 55:9748-9752 (2016), which is hereby incorporated by reference in its entirety). The color change of Ag foil during the preparation was shown in FIG. 38A. The chemical state change between AgO_x and Ag^0 during synthesis and the successful formation of OD-Ag was confirmed by X-ray diffraction (XRD) spectroscopy (FIG. 39B) and X-ray photoelectron spectroscopy (XPS) (FIG. 39C) (Murray et al., "Shape- and Size-Selective Electrochemical Synthesis of Dispersed Silver(I) Oxide Colloids," *Nano Lett.* 5:2319-2324 (2005), which is hereby incorporated by reference in its entirety). Scanning electron microscope (SEM) imaging (FIG. 31A) shows that OD-Ag has a rough surface with small particles (around 100 nm), in contrast to the smoother surface of Ag foil (FIGS. 40A-40F). Interestingly, optimized synthesis created a stepped and wave-like morphology with ± 250 nm of surface depth, which was confirmed by atomic force microscopy (AFM) analysis (FIG. 31B and FIGS. 40A-40D) and lower-magnification SEM images (FIGS. 40E-40F). Underpotential deposition (UPD) of Pb (Kim et al., "Achieving Selective and Efficient Electrocatalytic Activity for CO₂ Reduction Using Immobilized Silver Nanoparticles," *J. Am. Chem. Soc.* 137:13844-13850 (2015), which is hereby incorporated by reference in its entirety) (FIGS. 41A-41B) showed OD-Ag has 27.1 cm² of electrochemical surface area (ECSA), or 13 times as much as the same geometric size of Ag foil (2.1 cm²).

[0224] As shown in FIG. 31C, compared with Ag foil, the onset potentials (NO₃RR, NO₂RR, and HER) on OD-Ag are positively shifted by approximately 200 mV with the wide onset potential window still maintained. Besides, by comparing FIG. 31C with FIG. 37A, OD-Ag showed the widest potential difference between NO₃RR and NO₂RR (440 mV), as well as between NO₃RR and HER (540 mV), among the total 18 metals screened.

[0225] Throughout the potential range of -0.90 to -1.15 V_{Ag/AgCl}, OD-Ag delivered 5-10 times higher NO₃⁻ conversion than Ag foil in the same electro-reduction experiment with the electrolyte containing 0.1 M NO₃⁻ for one hour (FIG. 42A). More importantly, ultra-high faradaic efficiency (FE) towards NO₂⁻ ranging from 95.4% to 91.3% and selectivity between 98.8% to 95.9% were obtained under the electrode potential from -0.90 V to -1.15 V_{Ag/AgCl}, accordingly (FIG. 42B).

[0226] The intrinsic activity of NO₃RR was largely enhanced on the in-situ electrochemically fabricated OD-Ag, as confirmed by comparing OD-Ag with a commercial nano-Ag catalyst (i.e., Ag NPs/Ag: Ag nanoparticle-coated Ag foil). As shown in FIGS. 43A-43E, under similar conditions (particle size, substrate, etc.), OD-Ag exhibited tripled area-specific activity (0.72 vs. 0.26 mA cm⁻²_{Ag}) and over doubled NO₃⁻ conversion (19.6% vs. 8.5%). The substantially increased area-specific activity could originate from the wave-like morphology and increased abundance of under-coordinated Ag sites on the surface (discussed in detail in the DFT section) (Pander III et al., "Understanding the Heterogeneous Electrocatalytic Reduction of Carbon Dioxide on Oxide-Derived Catalysts," *ChemElectroChem* 5:219-237 (2018); Back et al., "Active Sites of Au and Ag Nanoparticle Catalysts for CO₂ Electroreduction to CO,"

ACS Catal. 5:5089-5096 (2015), which are hereby incorporated by reference in their entirety).

[0227] The high NO₃⁻-to-NO₂⁻ selectivity on OD-Ag can be maintained in a wide potential window even at low NO₃⁻ concentrations, indicating the basis of a robust and well-manageable pathway. At lower NO₃⁻ concentrations (0.05 and 0.01 M), as shown in FIG. 31D, NO₂ production still dominated on OD-Ag with the NO₃⁻-to-NO₂⁻ selectivity all higher than 87.3% in the potential range of -1.00 to -1.30 V_{Ag/AgCl}, by applying the exact amount of theoretical charge required to completely reduce 0.01 M NO₃⁻ to NO₂⁻ (i.e., 29 C, FIG. 31D). More negative potentials resulted in a gradual increase in NH₄⁺ generation, while the charge consumption by HER remained insignificant for all tested conditions (FE: <10%, FIG. 44).

[0228] OD-Ag was also compared with the widely used Cu foil at -1.30 V_{Ag/AgCl} under same experimental conditions. With 0.01 M NO₃⁻, it was found that OD-Ag outperformed Cu in both NO₃⁻ conversion (65.3% vs. 39.0%) and NO₃⁻-to-NO₂⁻ selectivity (87.3% vs. 48.5%, FIG. 31E). Their performance difference was further validated by tests under different NO₃⁻ concentrations and strongly negative potential of -1.50 V_{Ag/AgCl} (FIG. 45). The exceptionally high NO₃RR selectivity to NO₂⁻ on OD-Ag also outperforms many other reported Cu-based catalysts (Yoshioka et al., "Electrocatalytic Reduction of Nitrate to Nitrous Oxide by a Copper-Modified Covalent Triazine Framework," *J. Phys. Chem.* 120:15729-15734 (2016); Wang et al., "Enhanced Nitrate-to-Ammonia Activity on Copper-Nickel Alloys via Tuning of Intermediate Adsorption," *J. Am. Chem. Soc.* 142:5702-5708 (2020); Reyter et al., "Study of the Electroreduction of Nitrate on Copper in Alkaline Solution," *Electrochim. Acta* 53:5977-5984 (2008); Perez-Gallent et al., "Electrocatalytic Reduction of Nitrate on Copper Single Crystals in Acidic and Alkaline Solutions," *Electrochim. Acta* 227:77-84 (2017), which are hereby incorporated by reference in their entirety).

[0229] As expected, the observed potential of losing dominance ($\geq 90\%$ selectivity) for NO₃⁻-to-NO₂⁻ (-1.30 V_{Ag/AgCl}) is fairly consistent with the potential that triggers the NO₂⁻-to-NH₄⁺ reaction in NO₂⁻ solution (-1.25 V_{Ag/AgCl}) at the same concentration of 0.01 M (FIG. 46A-46B). Interestingly, a detectable level of NH₂OH showed up under relatively more negative potentials in NO₃RR (FIG. 31C). In addition, more NH₂OH was generated from direct NO₂RR (selectivity up to 5.6%, FIGS. 47A-47D). Such results are in concert with the recognition that NH₂OH is a reaction intermediate to NH₄⁺ for the reduction of NO₃⁻ and NO₂⁻ (Shen et al., "Electrocatalytic Nitrate Reduction by a Cobalt Protoporphyrin Immobilized on a Pyrolytic Graphite Electrode," *Langmuir* 31:8495-8501 (2015); Wang et al., "Unveiling the Activity Origin of a Copper-Based Electrocatalyst for Selective Nitrate Reduction to Ammonia," *Angew. Chem. Int. Ed.* 59:5350-5354 (2020), which are hereby incorporated by reference in their entirety).

[0230] In addition to the high NO₃⁻-to-NO₂⁻ activity, OD-Ag appeared highly durable and robust under testing conditions. As evidenced by XPS and XRD spectra (FIGS. 47A-47B), the chemical state of Ag in OD-Ag was unchanged after the electrochemical measurements. Moreover, neither structural change nor Ag leaching was detected (FIGS. 47C-47D).

[0231] Mechanism and Kinetics of NO₃RR on OD-Ag

[0232] To obtain more mechanistic insights into the electro-kinetics for NO₃⁻-to-NO₂⁻, the reaction order with respect to the NO₃⁻ concentration was analyzed by fitting the partial current density for NO₃⁻-to-NO₂⁻ against the NO₃⁻ concentration in log-log scale. Under -0.85 V_{Ag/AgCl} (i.e., 60 mV more negative than the onset potential), ~100% FE of NO₃⁻ to NO₂⁻ has been verified on OD-Ag in all tested NO₃⁻ concentrations (0.010-0.100 M, adjusted to pH 4 for each case), allowing the LSV currents (FIG. 48) of NO₃⁻ reduction to be used as the partial currents for NO₃⁻-to-NO₂⁻. Note that the same reference electrode (Ag/AgCl) was used in all NO₃⁻ concentrations to ensure the accurate potential control, thanks to its pH-insensitive nature (Eliaz and Gileadi, *Physical Electrochemistry: Fundamentals, Techniques, and Applications*, John Wiley & Sons (2019), which is hereby incorporated by reference in its entirety). As shown in FIG. 49A, a slope of 0.87 was obtained in the concentration range from 0.010 M to 0.075 M, strongly suggesting the first-order dependence of the NO₃⁻-to-NO₂⁻ reaction on the NO₃⁻ concentration. The concentration of 0.100 M NO₃⁻ does not follow the fitting, mainly due to the saturated active sites in NO₃⁻ adsorption. The Tafel curves showed a slope of 120 mV dec⁻¹ (FIG. 50), which corresponds to an empirical transfer coefficient ($\alpha=2.303RT/F \text{ d log}(j)/\text{dE}$) of 0.48. This suggested the first-electron transfer involved in the rate-determining step (RDS) of NO₃⁻-to-NO₂⁻ reaction on OD-Ag (Bard & Faulkner, "Electroactive Layers and Modified Electrodes," *Electrochemical Methods: Fundamentals and Applications*, 2nd Ed. John Wiley & Sons, NY, New York, 580-632 (2000), which is hereby incorporated by reference in its entirety). Further, in the temperature range of 20–71° C., a moderate apparent activation energy was obtained (15.8 kJ mol⁻¹, under -1.10 V_{Ag/AgCl}, FIGS. 51A-51B).

[0233] In particular, NO₃⁻-to-NO₂⁻ reaction kinetics (or the current density) on OD-Ag is mainly regulated by the NO₃⁻ concentration under a facile potential. For example, by applying 100% of theoretical charge (29 C) in converting 0.01 M NO₃⁻ at -1.10 V_{Ag/AgCl}, the reaction rate was gradually decreased to zero during the consumption of NO₃⁻ (FIGS. 52A-52B). Extending reaction time or applying excess charges is hard to overcome the fundamental obstacle for the further reduction of accumulated NO₂ or trigger HER on OD-Ag.

[0234] Since two protons are involved in the NO₃⁻-to-NO₂⁻ reaction, H/D kinetic isotope effect (KIE) was studied by comparing the LSV in different solvents: pure H₂O, pure D₂O, and two ratios of mixtures on OD-Ag in 0.1 M NO₃⁻-containing electrolyte. As shown in FIG. 49B, a prominent isotopic effect was observed with a KIE value of 1.33 under -0.85 V_{Ag/AgCl} (not a mass-transport-limited potential). Such observation implies that protons also participate in the RDS of NO₃⁻-to-NO₂⁻ reaction, in agreement with the proton-assisted mechanism identified by DFT computations discussed in the next section.

[0235] ¹⁴N/¹⁵N isotopic experiments were designed and conducted to probe the NO₃⁻ reduction kinetics and pathways on OD-Ag. Specifically, an equal concentration (0.025 M) of ¹⁵NO₃⁻ and ¹⁴NO₃⁻ was used in the solution medium, and two characteristic electrode potentials (-1.30 and -1.50 V_{Ag/AgCl}) were investigated, under which negligible and considerable levels of NH₄⁺ was generated, respectively. Enabled by the simultaneous detection of both isotopically

labeled ¹⁴NH₄⁺ and ¹⁵NH₄⁺ by NMR spectroscopy (FIG. 49C), the kinetics of the following three separate reactions can be revealed: ¹⁵NO₃⁻ to ¹⁵NO₂⁻ (reaction 1, k₁ as the apparent rate constant), ¹⁴NO₂⁻ to ¹⁴NH₄⁺ (reaction 2, k₂), and ¹⁵NO₃⁻ to ¹⁵NH₄⁺ (reaction 3, k₃). The detailed kinetic model derivation, data collection, and kinetics regressions are shown in the isotopic experiment and kinetics modeling section (supra) and FIGS. 32A-32G.

[0236] As shown in FIGS. 32A-32G, k₂ (0.0064 min⁻¹) is approximately a quarter of k₁ (0.0273 min⁻¹) under -1.30 V_{Ag/AgCl}, while k₃ (0.0007 min⁻¹) is negligible. Under -1.50 V_{Ag/AgCl}, both k₂ and k₃ grew much more prominently than k₁. The k₂ and k₃ increased 4 times and 8 times, respectively, from -1.30 to -1.50 V_{Ag/AgCl}. As such, k₂ and k₃ attained about 81% and 18% of k₁, respectively.

[0237] k₃ is non-negligible under strongly negative potentials, indicating a direct NO₃⁻-to-NH₄⁺ reaction pathway that "bypasses" the desorption of the reaction intermediate (NO₂^{*}; the precursor of NO₂⁻ product (Dima et al., "Electrocatalytic Reduction of Nitrate at Low Concentration on Coinage and Transition-Metal Electrodes in Acid Solutions," *J. Electroanal. Chem.* 554:15-23 (2003); Dima et al., "Nitrate Reduction on Single-Crystal Platinum Electrodes," *Electrochim. Acta* 50:4318-4326 (2005), which are hereby incorporated by reference in their entirety)) and then directly turns into NH₄⁺ product. This experimentally detected direct NO₃⁻-to-NH₄⁺ reaction pathway is consistent with the DFT calculation prediction noted by the recent work on a Cu-based catalyst (Chen et al., "Electrochemical Reduction of Nitrate to Ammonia via Direct Eight-Electron Transfer Using a Copper-Molecular Solid Catalyst," *Nat. Energy* 5:605-613 (2020), which is hereby incorporated by reference in its entirety).

[0238] In addition, very low FE towards NO_x gas products were detected from both NO₃RR and NO₂RR (N₂O≤0.19%, NO/NO₂≤0.007%, Table 13). It also justifies the omission of NO_x products in the kinetics model.

[0239] A Combined Electrocatalytic-Catalytic Process for NO₃⁻ Removal from Agricultural Waste Streams

[0240] Built on the exceptionally-high NO₃⁻-to-NO₂⁻ selectivity on OD-Ag and the highly reactive property of NO₂⁻, a combined electrocatalytic-catalytic water treatment application was proposed. NO₃⁻-containing agricultural waste was treated by coupling the electrocatalytic NO₃⁻-to-NO₂⁻ step on OD-Ag with a subsequent catalytic NO₂⁻-to-N₂ step on a commercial 5 wt. % Pd/C catalyst using the clean reducing agent H₂ that is generated on-site by a PEM-based water electrolyzer (FIG. 53A and FIG. 54).

[0241] It is important to confirm the final reduction product is non-toxic N₂ instead of NO_x. A concentrated NO₂⁻ solution (0.5 M) was reduced to increase the signal intensity for more accurate quantification by on-line gas chromatography (GC). Indeed, on-line GC confirmed 93.4% selectivity towards N₂, with selectivity towards NH₄⁺, NO, and N₂O of only 0.11%, 0.0009%, and 0.19% (FIGS. 55A-55B and Table 15), respectively, based on colorimetry and off-line GC methods. The catalytic reaction kinetics for NO₂⁻-to-N₂ was examined on Pd/C in 0.01 M NO₂ solution (FIGS. 56A-56C), and a pseudo-first-order behavior was observed (R²=0.99, FIG. 56B) with a rate constant of 27.96 L g_{Pd}⁻¹min⁻¹. No apparent drop was observed in catalytic

performance in three consecutive operations (FIG. 56C). Additional control experiments excluded possible adsorption of NH_4^+ or NO_2^- on the high-surface-area carbon support (FIGS. 57A-57B) (Toebes et al., "Synthesis of Supported Palladium Catalysts," *J. Mol. Catal. A Chem.* 173:75-98 (2001), which is hereby incorporated by reference in its entirety).

TABLE 15

Content of NO and N_2O Products for the Catalytic Reduction of 0.5M NO_2^- . Reaction Conditions and Calculation of Flow Rate are Detailed in the Quantification of H_2 and N_2 Section (supra)			
Reaction time (min)	Converted NO_2^- (mol)	Detected NO (ppm)	Detected N_2O (ppm)
10	0.0075	7.2	165.2
15	(for t = 0-120 min)	3.6	(for t = 0-60 min)
20		2.4	
40		1.0	
60		<1.0[a]	
80		<1.0	236.3
100		<1.0	(for t = 60-120 min)
120		<1.0	

[a] "<1.0 ppm" indicates the NO content was below the detection limit (1.0 ppm) of the nitrogen oxides detector tube.

Note:

Estimation of selectivity to NO and N_2O for t = 0-120 min

$$n_{\text{N}_2\text{O}} = 14 \text{ mL min}^{-1} \times 60 \text{ min} \times (165.2 + 236.3) \times 10^{-6} \times 0.0415 \text{ mol L}^{-1} / 1000 = 1.40 \times 10^{-5} \text{ (mol)}$$

The selectivity of N_2O is

$$S_{\text{N}_2\text{O}} = \frac{1.40 \times 10^{-5} \text{ mol}}{0.0075 \text{ mol}} \times 100\% = 0.19\%$$

Similarly, the estimated selectivity to NO is 0.0009% for t=0-120 min.

[0242] To examine the NO_3^- -removal capability, the combined electrocatalytic-catalytic process was tested to treat three solution media: 0.1 M KCl, a simulated waste stream from ion-exchange columns (Paidar et al., "Electrochemical Removal of Nitrate Ions in Waste Solutions After Regeneration of Ion Exchange Columns," *J. Appl. Electrochem.* 29:611-617 (1999), which is hereby incorporated by reference in its entirety), and real-world agricultural wastewater (collected from Des Moines Water Works, Iowa), all of which were enriched to contain 0.01 M NO_3^- (i.e., 140 ppm-N). LSV showed no significant difference in the three solution media (FIG. 58). After the combined process for water treatment, 95+% of NO_3^- was converted with <3.5 ppm of NH_4^+ -N and <5.9 ppm of NO_3^- -N remaining, and no NO_2^- -N was detected in any of the treated solutions (FIG. 53B). Detailed experimental results and other tested reaction conditions are summarized in Table 16. The combined denitrification process in this work presents one of the lowest undesirable selectivity towards NH_4^+ and one of the highest desirable selectivities towards N_2 among other reported catalytic/electrocatalytic processes, as shown in Table 17.

TABLE 16

Summary of the Experimental Results of the Combined Denitrification Process										
Reaction medium	c_0 (NO_3^-) (ppm-N)	Potential (V)[a]	Charge (C)	Step 1 (Electro-reduction on OD-Ag)			Step 2 (Catalytic reduction on Pd/C)			
				FE (NO_2^-)	FE (H_2)	X (NO_3^-)[b]	S (NH_4^+)[c]	c (NO_3^-) (ppm-N)	c (NO_2^-) (ppm-N)	c (NH_4^+) (ppm-N)
0.1M KCl (pH = 4)	140	-1.10	31.5	82.0%	4.9%	98.8%	1.8%	1.7	—[d]	2.4
	140	-1.00	31.5	82.0%	2.1%	95.9%	1.3%	5.9	—	1.8
	140	-1.00	31.5	85.2%	2.7%	93.1%	1.6%	9.7	—	2.1
	140	-1.00	31.5	84.1%	1.9%	96.1%	1.8%	5.7	—	1.7
	140	-1.00	29.5	84.6%	2.3%	90.9%	1.5%	12.6	—	1.8
	70	-1.00	14.5	84.0%	1.6%	92.9%	1.3%	5.0	—	0.8
Simulated[e]	140	-1.00	33.5	80.6%	3.8%	97.4%	1.6%	1.7	—	2.4
Real[f]	140	-1.00	35.3	78.5%	3.2%	98.4%	2.5%	3.6	—	3.5

[a] Potential (V) vs. Ag/AgCl.

[b] Conversion of NO_3^- .

[c] Selectivity to NH_4^+ .

[d] "—" indicates the level of NO_2^- was below the detection limit of 1 μM of the colorimetric method.

[e] Simulated waste stream from the ion-exchange columns (Hörold et al., "Development of Catalysts for a Selective Nitrate and Nitrite Removal from Drinking Water," *Catal. Today* 17: 21-30 (1993), which is hereby incorporated by reference in its entirety).

[f] Real agricultural wastewater from Des Moines Water Works, Iowa

TABLE 17

Summary of the Reported Electrocatalytic or Catalytic Systems for NO ₃ ⁻ Removal.								
"N/A" Indicates the Parameter is not Available in the Publication								
c ₀ (NO ₃ ⁻) (ppm-N)	System	Catalyst	X (NO ₃ ⁻)[a]	S (N ₂)[b]	S (NO ₂)[c]	S (gases)[d]	S (NH ₄ ⁺)[e]	Ref.
700	Electrocatalytic	Cu	90%	1%	0.1%	N/A	77.3	a
112	Electrocatalytic	Blended Sn _{0.8} Pd _{0.2} /S	100%	81%	0	N/A	14[f]	b
700	Electrocatalytic	Sn	99%	92%	0	N/A	8%	c
700	Electrocatalytic	Bi	95%	65%	16%	N/A	19%	d
50	Electrocatalytic	nZVI@OMC	65%	N/A	N/A	74%	26%	e
140	Electrocatalytic	BDD	48%	45%	0	N/A	7%[g]	f
100	Electrocatalytic[h]	nZVI@D201	80%	N/A	N/A	95%	N/A	r
50	Catalytic	PdIn	100%	N/A	N/A	95%	5%	h
100	Catalytic	PdIn	82%	N/A	N/A	74%	26%	i
360	Catalytic	PdCu	>90%	N/A	<1%	94%	3%	j
30	Catalytic	PdSn	100%	N/A	N/A	91%	9%	k
140	Electrocatalytic-catalytic	OD-Ag and Pd/C	98%	93%	N/A	99%	1%	This work

[a]Conversion of NO₃⁻.

[b]Selectivity to N₂.

[c]Selectivity to NO₂.

[d]Selectivity to gaseous products [= (Reacted NO₃⁻ - Produced NH₄⁺ - Produced NO₂⁻)/(Reacted NO₃⁻)].

[e]Selectivity to NH₄⁺.

[f]Yield of NH₄⁺ (= Conversion of NO₃⁻ × Selectivity of NH₄⁺).

[g]FE of NH₄⁺.

[h]Electro-reduction of NO₃⁻ to NH₄⁺ coupled with electro-oxidation of NH₄⁺ to N₂.

a: Polatides & Kyriacou, "Electrochemical Reduction of Nitrate Ion on Various Cathode Reaction Kinetics on Bronze Cathode," *Journal of Applied Electrochemistry* 35: 421-427 (2005), which is hereby incorporated by reference in its entirety

b: Su et al., "Mode of Electrochemical Deposition on the Structure and Morphology of Bimetallic Electrodes and its Effect on Nitrate Reduction Toward Nitrogen Selectivity," *Applied Catalysis B: Environmental* 257 (2019), which is hereby incorporated by reference in its entirety

c: Katsoumaros et al., "Efficient Electrochemical Reduction of Nitrate to Nitrogen on Tin Cathode at Very High Cathodic Potentials," *Electrochim. Acta* 52: 1329-1338 (2006), which is hereby incorporated by reference in its entirety

d: Dartsiou & Kyriacou, "Electrochemical Reduction of Nitrate on Bismuth Cathodes," *Journal of Electroanalytical Chemistry* 630: 69-74 (2009), which is hereby incorporated by reference in its entirety

e: Teng et al., "Selective Nitrate Reduction to Dinitrogen by Electrocatalysis on Nanoscale Iron Encapsulated in Mesoporous Carbon," *Environ. Sci. Technol.* 52: 230-236 (2018), which is hereby incorporated by reference in its entirety

f: Kuang et al., "Electrochemical Reduction of Nitrate on Boron-Doped Diamond Electrodes: Effects of Surface Termination and Boron-Doping Level," *Chemosphere* 251: 126364 (2020)

g: Liu et al., "Electrochemically Mediated Nitrate Reduction on Nanoconfined Zerovalent Iron: Properties and Mechanism," *Water Res.* 173: 115596 (2020), which is hereby incorporated by reference in its entirety

h: Guo et al., "Insights into Nitrate Reduction Over Indium-Decorated Palladium Nanoparticle Catalysts," *ACS Catal.* 8: 503-515 (2017), which is hereby incorporated by reference in its entirety

i: Marchesini et al., "Study of the Interactions of Pd, In with SiO₂ and Al₂O₃ Mixed Supports as Catalysts for the Hydrogenation of Nitrates in Water," *Catalysis Communications* 21: 9-13 (2012), which is hereby incorporated by reference in its entirety

j: Constantinou et al., "Catalytic Removal of Nitrates from Waters," *Catalysis Today* 151: 190-194 (2010), which is hereby incorporated by reference in its entirety

k: Hamid et al., "Highly Reactive and Selective Sn-Pd Bimetallic Catalyst Supported by Nanocrystalline ZSM-5 for Aqueous Nitrate Reduction," *Applied Catalysis B: Environmental* 187: 37-46 (2016), which is hereby incorporated by reference in its entirety

[0243] In addition, this application experimentally demonstrated that H₂ generated on-site by a PEM-based water electrolyzer can completely replace the H₂ feed from the pressurized cylinder (FIGS. 33A-33B), avoiding the use of commercial H₂ which not only relies heavily upon the reforming of fossil fuels for production but also requires costly infrastructure for storage and transportation (van der Zwaan et al., "The Cost of Pipelining Climate Change Mitigation: An Overview of the Economics of CH₄, CO₂ and H₂ Transportation," *Appl. Energy* 88:3821-3831 (2011), which is hereby incorporated by reference in its entirety).

CONCLUSION

[0244] The unique NO₃⁻-to-NO₂⁻ selectivity was discovered on OD-Ag among a series of metal surfaces. Its significantly enhanced activity compared to nano-Ag could originate from the wave-like stepped-surface that exposes an increased abundance of under-coordinated active sites. Up to 98% selectivity and 95% faradaic efficiency were achieved and well-maintained in a wide potential window. Electro-kinetics and DFT computations provided mechanistic insights into the ultrahigh NO₃⁻-to-NO₂⁻ selectivity observed on OD-Ag, which was not prominent on Cu. Built

on the highly selective NO₃⁻-to-NO₂⁻ pathway on OD-Ag, a combined electrocatalytic-catalytic process was demonstrated for NO₃⁻ removal from real-world agricultural wastewater to N₂. Powered by inexpensive renewable electricity, the directional reduction of NO₃⁻ has the ability to unlock the potential to economically denitrify agricultural wastewater towards utterly harmless N₂. The produced NO₂⁻ may also be utilized as a reactive platform species for distributed manufacturing of various nitrogen-based products in need.

[0245] Converting excess nitrate (NO₃⁻) from waste streams, through nitrite (NO₂⁻) as the essential intermediate, to harmless dinitrogen (N₂) has become an important environmental and health topic. However, realizing highly-selective NO₃⁻ reduction towards NO₂⁻ has proven challenging, largely because of the high reactivity of NO₂⁻ in its deep reduction to ammonia/ammonium (NH₃/NH₄⁺) with the lowest valence. The NO₃⁻-to-NO₂⁻ conversion is usually catalyzed by nitrate reductase enzymes in nature. This application reports the exceptionally high selectivity and significantly enhanced intrinsic activity of electrocatalytic NO₃⁻-to-NO₂⁻ conversion on oxide-derived silver (OD-Ag). Up to 98% NO₃⁻-to-NO₂⁻ selectivity and 95% faradaic

efficiency were achieved in a wide potential window. Electro-kinetics and DFT computations provided insights into the underlying cause of the unique selectivity observed on OD-Ag compared with Cu. Benefiting from the unique NO_3^- -to- NO_2^- selectivity on OD-Ag, a catalytic process of NO_2^- -to- N_2 was coupled to treat NO_3^- -containing real-world wastewater forming N_2 .

[0246] Although preferred embodiments have been depicted and described in detail herein, it will be apparent to those skilled in the relevant art that various modifications, additions, substitutions, and the like can be made without departing from the spirit of the present application and these are therefore considered to be within the scope of the present application as defined in the claims which follow.

What is claimed:

1. A system for removal of nitrate from water, said system comprising:

a first reactor comprising a porous oxide-derived silver electrode (OD-Ag) for electrocatalytic reduction of nitrate (NO_3^-) to nitrite (NO_2^-) and

a second reactor comprising a Pd-based catalyst for catalytic reduction of nitrite (NO_2^-).

2. The system according to claim 1, wherein the first reactor comprises an H-type cell reactor structure.

3. The system according to claim 2, wherein the first reactor comprises a catholyte portion and an anolyte portion, wherein the catholyte portion and the anolyte portion are connected by a membrane.

4. The system according to claim 1, wherein the pH in the first reactor is at least 4.

5. The system according to claim 4, wherein the pH in the first reactor is between about 4 and 13.

6. The system according to claim 1, wherein the system further comprises:

a sealed trap acid solution to absorb NH_3 .

7. The system according to claim 1 further comprising: an online gas chromatography for H_2 quantification.

8. A method of removing nitrate from water, said method comprising:

providing a system comprising:

a first reactor comprising a porous oxide-derived silver electrode (OD-Ag) for electrocatalytic reduction of nitrate (NO_3^-) to nitrite (NO_2^-) and

a second reactor comprising a Pd-based catalyst for catalytic reduction of nitrite (NO_2^-);

introducing water containing nitrate (NO_3^-) into the first reactor to cause catalytic reduction of the nitrate into nitrite (NO_2^-) by the porous oxide-derived silver electrode (OD-Ag); and

introducing water from the first reactor into the second reactor to cause reduction of nitrite (NO_2^-) by the Pd-based catalyst, thereby removing nitrate from the drinking water.

9. The method according to claim 8, wherein the first reactor has an H-type cell reactor structure.

10. The method according to claim 9, wherein the first reactor comprises a catholyte portion and an anolyte portion, wherein the catholyte portion and the anolyte portion are connected by a membrane.

11. The method according to claim 8, wherein the pH in the first reactor is at least 4.

12. The method according to claim 11, wherein the pH in the first reactor is between about 4 and 13.

13. The method according to claim 8, wherein the system further comprises:

a sealed trap acid solution to absorb NH_3 .

14. The method according to claim 8, wherein H_2 generated from a cathode in the first reactor is used to reduce nitrite in the second reactor.

15. The method according to claim 8, wherein said water is selected from one or more of drinking water, agricultural river water, and downstream from an anion exchange column in a water treatment plant.

16. The method according to claim 8, wherein said method achieves a nitrate (NO_3^-) concentration of about 1.6-2.5 ppm (as Nitrogen).

17. The method according to claim 8, wherein said method achieves an NH_3 concentration of about 1.1-2.5 ppm NH_3 (as Nitrogen).

18. The method according to claim 8, wherein said method achieves an undetectable nitrite (NO_2^-) concentration.

19. The method according to claim 8, wherein molecular nitrogen gas (N_2) is a product from nitrite reduction in the second reactor.

20. The method according to claim 19, wherein the molecular nitrogen gas (N_2) is greater than 93% of the product from nitrite reduction in the second reactor.

* * * * *